Hisense

Qingdao Hisense HVAC Equipment Co., Ltd. Hisense International Center, Qingdao, China

63 http://www.hisensehvac.com

★ hhexport@hisense.com

f Hisense HVAC


















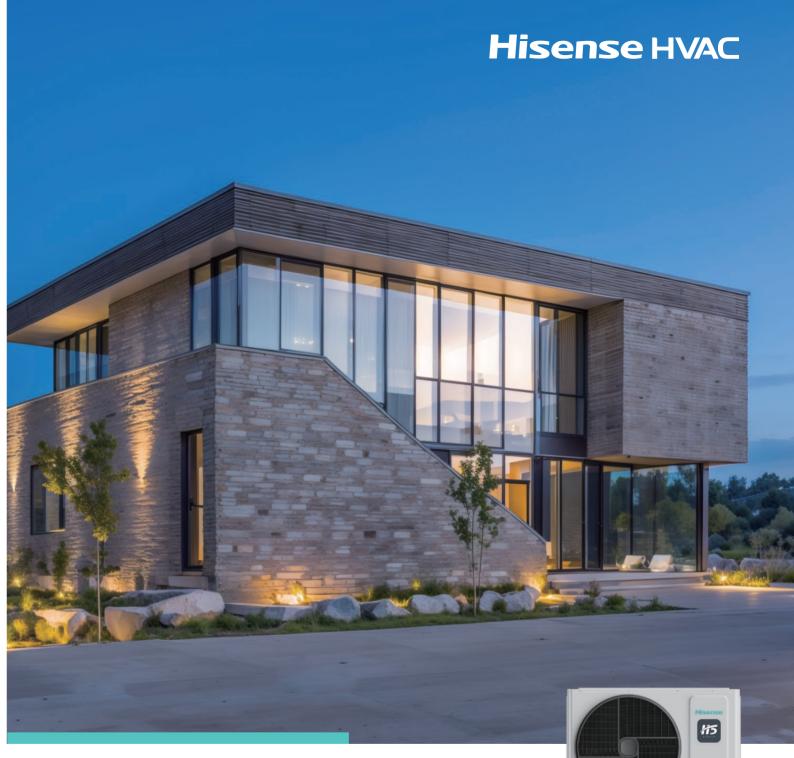



Innovative R32 Modular Side Flow VRF







Hisense SINCE 1969

Hisense is a well–known large–scale electronic information industrial group. With strong emphasis on technology and innovation, its efficient technological innovation system firmly grounds Hisense at the forefront of its peers. At present, Hisense brand family has expanded to include multiple famous brand Hisense, Toshiba, Gorenje and ASKO.

BUSINESS OVERVIEW

Multimedia •

TV and Display Devices Internet TV Operation Mobile Communication Devices Optical Communication Devices Chip

Household • Appliances

Refrigerator Freezer Air-conditioner Washing Machine Kitchen Appliance

IT Smart Systems •----

Smart City
Smart Community
Smart Transportation
Smart Business
Medical Electronic Devices
Smart Home System and Service

Real Estate & • - - Modern Services

Real Estate
High-end Shopping Mall Chain
Mould Design and Manufacturing
Finance
Trade











GLOBAL HISENSE SINCE 1969

Hisense has started a long-term sports marketing strategy to increase brand awareness worldwide. After the successful sponsorship of **UEFA EURO 2016 & 2020 & 2024** and **FIFA WORLD CUP 2018 & 2022**, Hisense has made clear its focus on football. Hisense also is the official partner of **FIFA Club World Cup 2025**.



Official Partner of UEFA EURO 2016

Official Sponsor of 2018 FIFA World Cup

Official Partner of UEFA EURO 2020



d Cup UEFA EURO 2024 FIFA Club World Cup 2025





Hisense HVAC MANUFACTURING BASE

Qingdao Hisense HVAC Equipment Co. Ltd. is a leading manufacturer of heating, ventilation, air conditioning and other HVAC equipments, integrated with the product development, manufacturing, sales and after-sales service as a whole.

Hisense HVAC always regards product technology research and development as the most important value. With strong technological innovation capabilities, Hisense HVAC has participated in the formulation and revision of 112 national standards, industry standards and association standards, and boasts 2020 authorized patents in the field of CAC and heat pump products. With the great support of all shareholders and customers, Hisense HVAC is expected to become the leading brand in the industry.

Note: The above data is as of Dec. 31th, 2024.





Hi-Smart 1/15

The industry's first R32 modular side-flow VRF!

Hi-Smart H5 is an innovative R32 solution that offers an unprecedented combination of benefits: a two-module combination capable of up to 32 HP, delivering performance on par with large top-flow units, all within slim, modular units that can be installed virtually anywhere. This innovation optimizes HVAC design, particularly for projects where space for outdoor units is limited.



Contents

	A 11 1*	
1 ()	Aesthetic	٠
	ACSUICUC	,

Outdoor Unit

12 Efficiency

26 Comfort

36 Indoor Units

18 Flexibility

28 Intelligence

Reliability

59 Accessories

ECO-FRIENDLY R32 REFRIGERANT

Hisense HVAC introduces the lower GWP (Global Warming Potential) refrigerant R32 on its VRF products, which is a perfect solution for attaining CO₂ emission targets.

R32 refrigerant contributes to meeting the F-gas regulation targets as described in EU Regulation 517/2014. We are determined to become CO₂ neutral by 2050 and create a sustainable future together with you.

Innovative solutions for promoting the decarbonization of buildings

In today's world, where climate change affects everyone, Hisense HVAC prioritizes the reduction of carbon emissions from buildings. The Hi-Smart H5 utilizes innovative R32 VRF technology to achieve this goal, while keeping comfort and cost-effectiveness intact.

Less refrigerant, less CO2-EQ emissions

By using the R32 refrigerant with a low Global Warming Potential (GWP) and the Hi-Smart H5 system's reduced refrigerant charge, the overall CO_2 equivalent emissions can be lowered by 76% compared to the traditional R410A products.



Features

- Zero Ozone Depletion Potential (ODP)
- Lower Global Warming Potential (GWP)
- Less Charge Amount Under the Same Capacity
- Single Component Refrigerant, Easy to Handle and Recycle

The optimal decision for the welfare of all.



Building owners

Promote the decarbonization of your buildings to enhance their value and amplify your investment returns.



Consultants

Secure your specifications. Ensure premium comfort. Ease buildings labelling.



Installers

Set yourself apart from competitors, choose the expert in inspired R32 technology, a leader since 2014.



Our planet

Always think about the consequences. Go beyond mere products and develop secure, low Global Warming Potential (GWP) solutions to honor the Earth.







The Hi-Smart H5 Series reflects the company's core values of "Beauty, Symmetry, and Unity" with its design that integrates squares and circles. This geometric fusion represents stability and harmony, demonstrating Hisense's dedication to aesthetic equilibrium. The goal is to craft a visually appealing and engaging experience, transforming technology into an art.




Essential Components for Ultimate Comfort

Integrating vital components—a well–ventilated grille, a fan, and a motor for efficient airflow, precision–engineered heat exchangers, and a powerful compressor—in perfect harmony, the Hi–Smart H5 Series brings you superior comfort with the technological refinement inherent in Hisense HVAC.

- **Geometric aesthetics of "Square and Circle"**
- 2 Axial Fan
 Wide diameter fan, air volume increased by 44%
- 3 Fan Motor Step-less DC motor for precise speed regulation
- 4 Motor bracket
 Strength increased by 1.33 times

- 5 Electrical Box
 Integrated electrical box to achieve stable operation
- 6 Compressor
 Enhanced vapor injection compressor for high efficiency
- Heat Exchanger
 Brand new dark-gray anti-corrosion fins
- 8 Gas-liquid Separator
 maintain the system's efficient operation
 and balance of oil levels



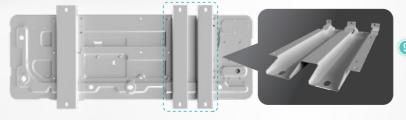

9 W-shaped pedestal Industry-first, strength increased by 50%

_ 10 _____





Vapor Injection Technology


Thanks to vapor injection technology, the Hi–Smart H5 is more energy–efficient and offers enhanced heating performance in low–temperature environments. The EVI scroll compressor has a 25% greater capacity than a conventional one for the same power consumption.





New Corrugated Fin


We are dedicated to the innovation of fin technology. The Hi-Smart H5 utilizes the latest dark-gray corrugated fins, with a fin width of 19.56mm, which enhances the defrosting performance of the heat exchanger and increases the heating capacity by 10%. Additionally, the use of dark-gray fins significantly improves the anti-corrosion performance of the outdoor unit.

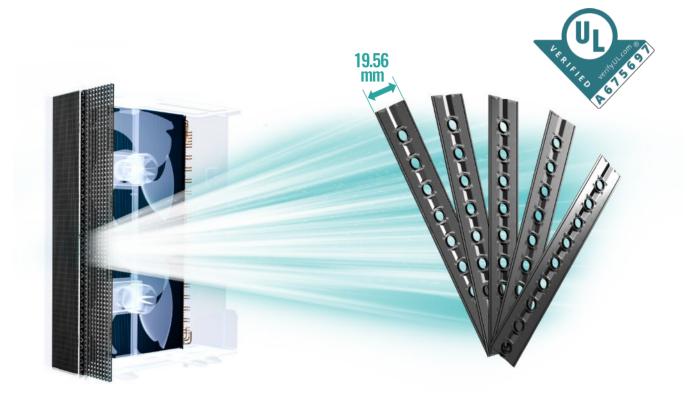



Wide Fan with DC Motor

The outdoor unit features a new generation of wide-diameter fans, with the fan diameter increased from 544mm to 700mm (600mm for single-fan unit). This upgrade results in a 44% increase in airflow at the same rotational speed, enhancing energy efficiency at lower speeds and boosting cooling capacity at higher speeds. Additionally, the unit is equipped with a DC inverter motor that enables precise speed control, ensuring stable and efficient operation.

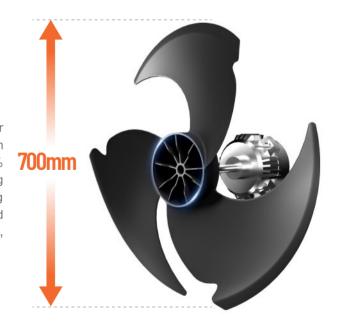


13 —






Electromagnetic Heating Technology

Featuring Hisense's proprietary electromagnetic heating technology, the need for an external electric heating belt is eliminated. This innovation heats the lubricating oil directly within the compressor's fixed rotor, reducing heat loss and enhancing heating efficiency. As a result, it significantly reduces the low-temperature preheating time and can lower power consumption by up to 74%.

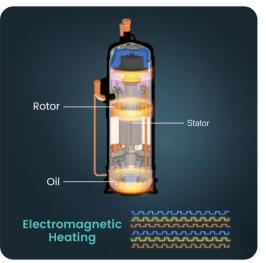

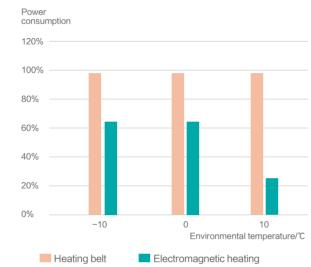

1W Standby Mode


During long-term standby periods such as holiday or transition season, traditional devices often result in unnecessary energy waste. Hisense H5 Series tackles this issue with its innovative 1W standby mode and circuit design, which not only saves on your electricity bills but also contributes to environmental protection, making the H5 Series a smart choice for both your wallet and the planet.



Note: Limited functionality in standby mode, only supports wake-up via wired controller or centralized control. Only available for double-fan units.

Energy-saving Mode


The Energy-saving Mode is an outstanding feature that optimizes the capacity output of the VRF system based on peak and off-peak electricity rates or restriction conditions, enabling energy-efficient operation without compromising comfort. The Energy-saving Mode offers a wide adjustment range (20%-100%) and can achieve precise control in 1% increments.

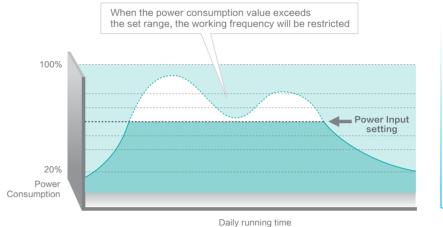





Load Balancing Control (LBC) Technology

LBC technology identifies the current load demand of each indoor unit and calculates the optimal air volume and temperature settings based on the unit's capacity, so as to balance the load output of each room. Compared to traditional refrigerant flow control methods, LBC technology increases balancing capacity by 30% and enhances energy efficiency by 18%.

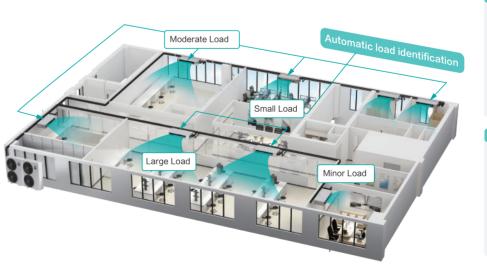






Temperature under conventional control





Two-Stage Subcooling


The Hi-Smart H5 utilizes a high-efficiency flow channel dual-metallic plate heat exchanger as a sub-cooler. Compared to conventional plate heat exchangers, it has a smaller volume, less heat exchange loss, superior heat exchange performance, and better subcooling performance.

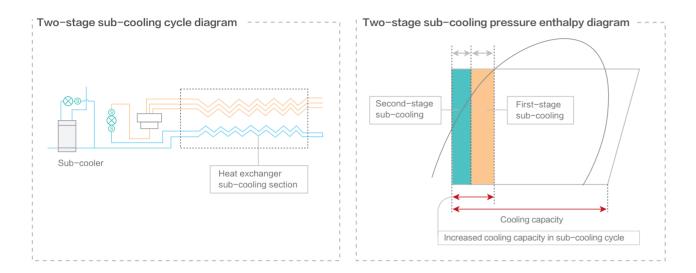



Multipie Oil Control

Hisense utilizes advanced multi-stage oil separation technology and oil return control technology, achieving a system oil return rate of up to 99.99%, ensuring a safe oil level for the compressor, thereby ensuring the long-term safe and reliable operation of the unit.

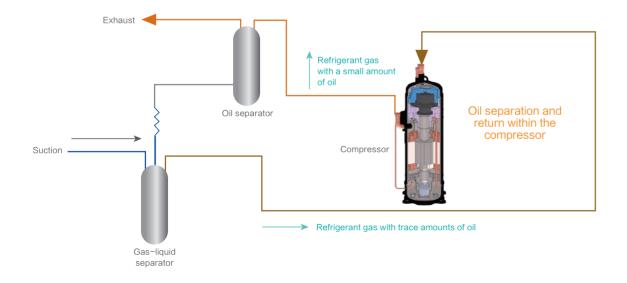




High-precision EEV

The outdoor unit is equipped with high-precision electronic expansion valves with 3000-step adjustment, enabling more precise control of refrigerant flow and reducing indoor temperature fluctuation. At the same time, this greatly reduces the system's operational power consumption.




3000-step EEV

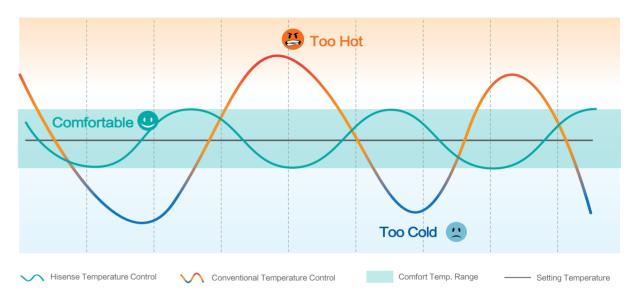



Dust-cleaning Technology

Keep your air conditioner performing at its best with Hi-Smart H5's innovative dust-cleaning technology. Our outdoor fan reverses direction to efficiently remove accumulated dust, reducing air resistance and maintaining optimal heat exchange. Experience uninterrupted comfort for the long run with Hi-Smart H5.

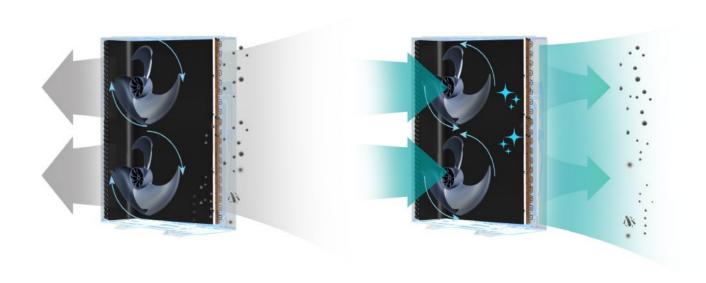





Less weight, Easier transportation

The Hi-Smart H5 unit features a slim design that is 28% lighter than the last generation top-flow unit for the same capacity, which allows it to be flexibly installed in tight spaces while also reducing product transportation and installation costs.



H5 side-flow VRF:Units fit easily into an elevator.




Conventional top-flow VRF: Units cannot be lifted by humans. A crane is necessary.



Slim and Compact Footprint

The H5 unit, with its smaller footprint and compact body compared to the last generation S Series top-flow unit for the same capacity, enables the utilization of the saved rooftop space for a green roof. This enhances the building's aesthetics.

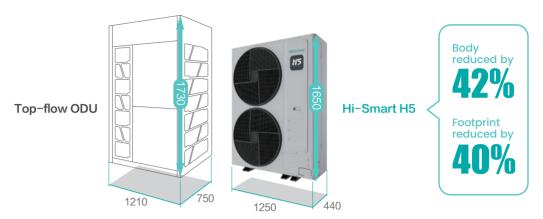

Unit: mm



Anywhere & Everywhere

Thanks to its slim modular design, H5 offers unrivaled flexibility of installation location. Save your building's most valuable area, and place H5 in the small narrow spaces of your building. On the rooftop, balcony, or indoors; you choose!



Rooftop Balcony






Wide Range of Connectable Indoor Units

Available for Hi-Smart H5 VRF system, our extensive range of indoor units comprises multiple types ranging from 5 kBtu/h to 96 kBtu/h to provide additional design flexibility.



Max. Match Ratio 200%

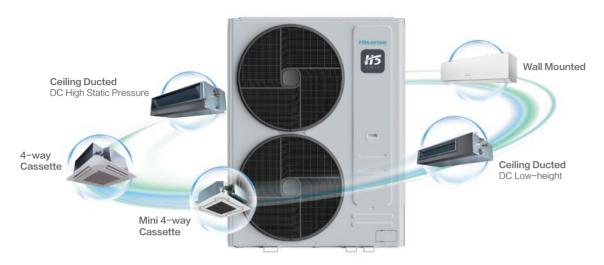


Note: A match ratio from 150% to 200% is allowed for cooling only.



Long Piping for Design Flexibility

The Hi–Smart H5 provides long piping length possibility of 175m, with a total piping length of 500m. The height difference between IDU and ODU can be up to a maximum of 50m. These generous allowances facilitate system design and better adapts your building layout.

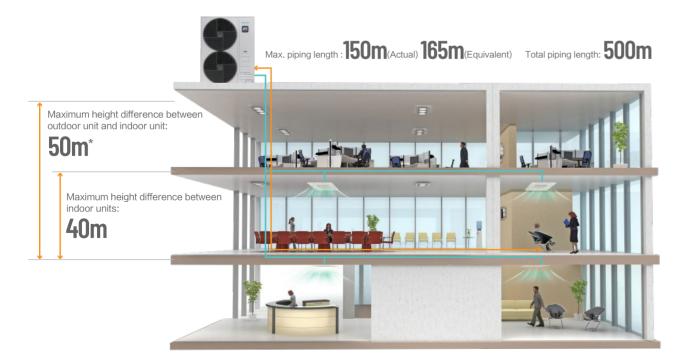


*Note: 40m if the outdoor unit is below the indoor unit



Flexible Air Discharge Directions

When outdoor units are installed in narrow spaces where an obstacle blocks the discharged air, a well-designed air outlet guide can divert the airflow to enhance heat dissipation efficiency.

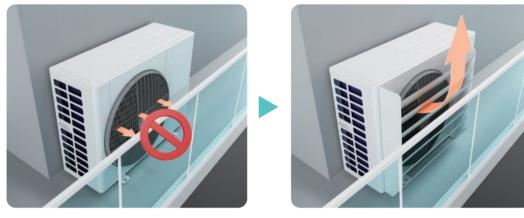


Poor Ventilation

Smooth Ventilation



Four-way Piping Connection

The Hi-Smart H5 is not hindered by installation restrictions on site, thanks to its flexible piping directions, which include front, bottom, right, and rear connections.

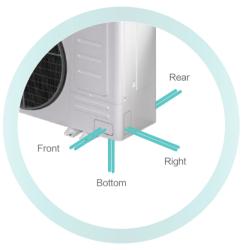



NFC Module (optional)

The Hi-Smart H5 supports the optional NFC module, allowing service engineers to simply touch their phones to the unit's NFC module to read operational data and diagnose system faults through an app, making service work more convenient and intelligent.







Wide Operation Range

The Hi-Smart H5 series boasts a wide operating temperature range, with cooling operations ranging from -10° C to 55° C DB and heating operations from -25° C to 16.5° C WB. Such a broad range ensures reliable performance in diverse conditions.



Note: The operation range of single–fan units is -10° C to 52° C in cooling mode and -25.5° C to 15.5° C in heating mode.




Electrical Control Box Cooling 2.0

Hi-Smart H5 has fully upgraded its electrical module cooling technology with an independent air channel inside the electrical control box, coupled with direct refrigerant cooling and Integrated air cooling technologies. These triple cooling solutions ensure the unit operates stably and efficiently in high-temperature environments.



Integrated Air Cooling

The combination of an inverter fan, a direct refrigerant cooling module, and a built–in independent air channel constitutes an integrated air–cooling solution. The innovation of combining fan air supply with direct refrigerant cooling can lower the internal temperature of the electrical box by $5-10^{\circ}$ C compared to traditional air–cooling methods.

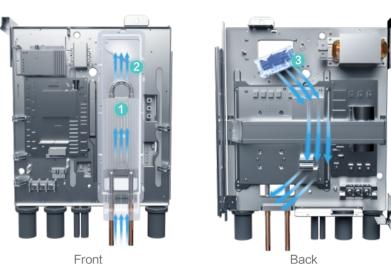

1 Direct refrigerant cooling

2 Air channel

3 Inverter fan

Direct Refrigerant Cooling

This design employs direct refrigerant cooling with corrugated fins, reducing thermal resistance by 20% compared to the previous copper–aluminum cooling, ensuring efficient operation of the inverter module and stable operation of the unit at 55°C high temperatures.







Sealed Electric Box

The H5 unit features a sealed electrical box for stable operation and a compact dual-sided module layout that saves 18% space. The top-mounted electrical box facilitates easy setup and maintenance.








Top Located



Maintenance

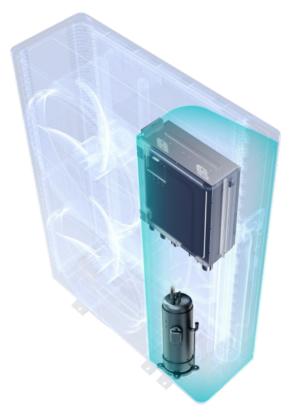

Backup Operation for Emergencies

When two H5 modules are combined, the backup operation function ensures the system won't come to a complete stop in the event of an outdoor unit failure. The unit can provide up to five backups, allowing the system to continue operating with the remaining module until service and repair are completed.



Multiple Measures Ensuring Room Safety


Refrigerant Leakage Detection

Real-time refrigerant leakage detection is essential for R32 refrigerant system. If the refrigerant concentration exceeds 5000ppm, the indoor unit will stop operation, and trigger the audible and visual alarm. It can also be linked to any third-party alarm system or ventilation system.

Refrigerant Recovery


In the event of a refrigerant leak, our system triggers alarms and shuts down. If the leak occurs in an indoor unit that exceeds the safe capacity, the system immediately activates refrigerant recovery. Furthermore, in the event of a sudden power outage, the shut-off box automatically closes the valves to prevent leaks.

The Progress of Refrigerant Recovery

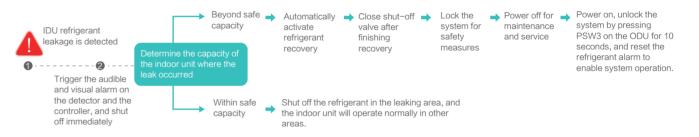



25 —

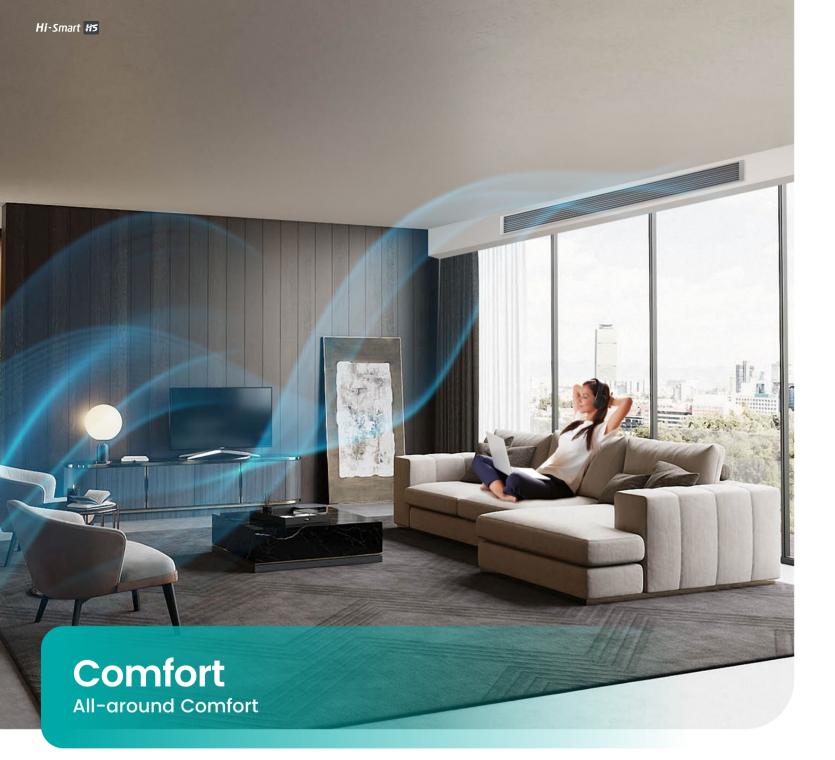



Low Noise Axial Fan

The fan incorporates a bionic structure and a concave trailing edge design, which positions the airflow closer to the fan's suction surface and minimizes radial flow. This innovative design effectively reduces the fan's air supply noise by 2.5 dB(A).




Related Patents: CN202410275466.6/CN202410275049.1/CN202430070887.6



Rotating Defrost for Constant Heat

For the Hi-Smart H5 with multiple systems, when the outdoor unit requires defrosting, each system will take turns to defrost. During this rotational defrost process, the indoor unit can continue to produce heat, ensuring continuous comfort for you.

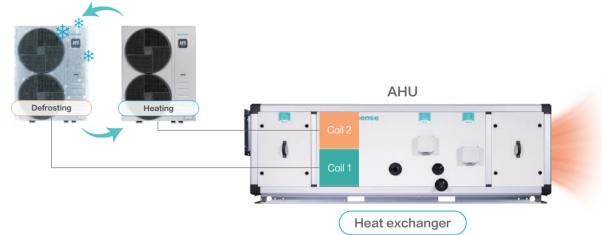



Low Noise Mode


The Hi-Smart H5 series outdoor units feature a low-noise operation mode, which offers multiple adjustable levels. The highest level is capable of reducing noise by up to 17dB(A). Users can flexibly set this mode at any time to meet their silent requirements during various periods.




Note: The low-noise mode can be set on the outdoor unit's PCB

Auto Night Quiet Mode

Generally, people are more sensitive to noise at night. The H5 outdoor unit can automatically activate the night quiet mode as needed, with noise levels potentially being reduced by up to 9dB(A).

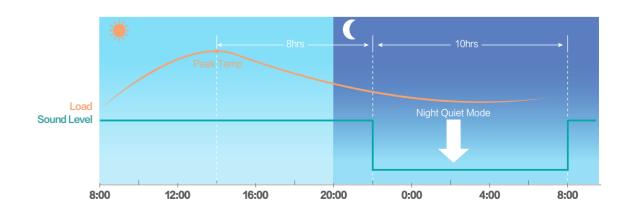

26 <u>27 -</u>

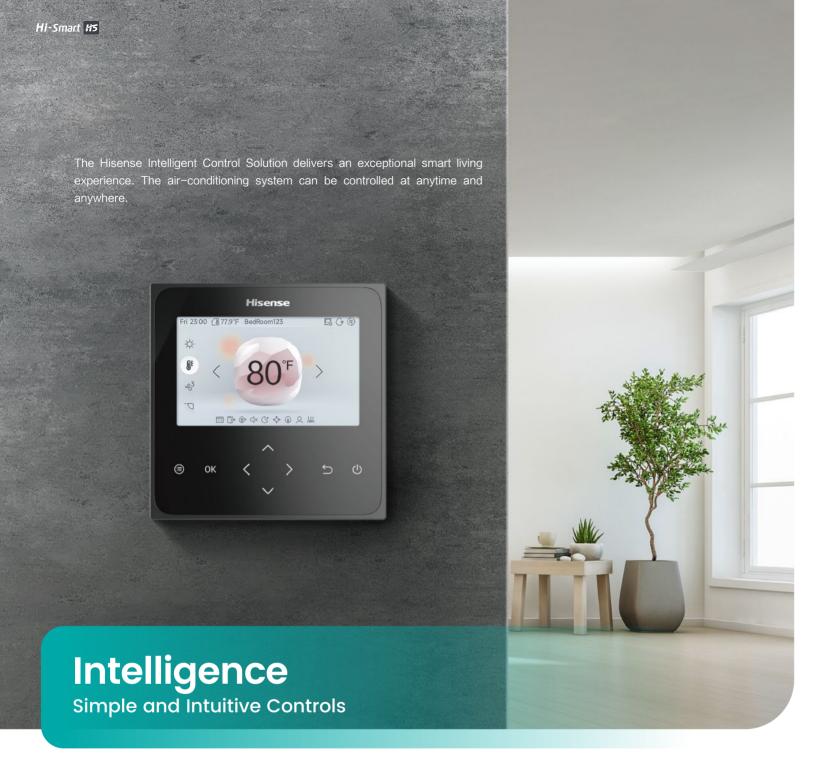

Individual Control

Wired Controller

Model: HYXM-VG01
Dimension (W × H × D): 5 × 5 × 6 in.
Connectable IDUs: 16pcs

- Six customized colors
- Diverse Display Colors
- Brand-new Auto Changeover
- Weekly/holiday schedule setting
- Refrigernt leakgae reminder



Centralized Control

Smart Touch II







Features

- Web access available
- Intuitive interface
- 14 languages for choice
- Weekly/yearly schedule setting
- Error reminder email



 Supporting OTA update (remotely) and USB update (locally)




Specifications

Model	Power Supply	Dimension	Net Weight
HYJM-RA10D	AC 100~240V/50/60Hz	170 × 252 × 37(mm)	1.12kg



Intelligent Control

Hi-Mit II

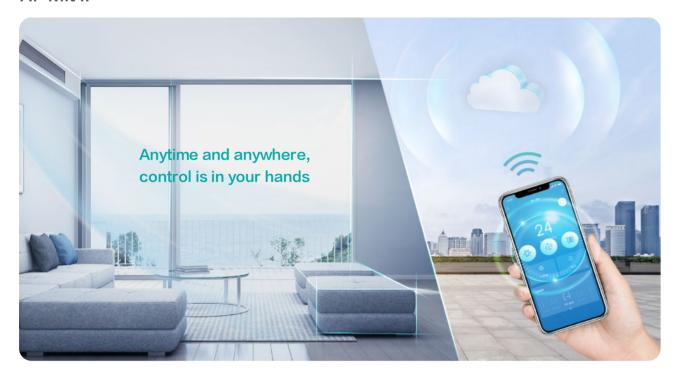

Brand-new Adapter and App

- O Stylish appearance and compact body
- O Compatible with VRF, hydro box and heat recovery ventilator
- Supporting OTA update
- Simple and intuitive interfaces





Convenient Control

- 12 languages available
- Energy management
- 2-level permission
- Online repair
- 7x24 schedule setting
- Customized scenes setting



Specifications

Model	Power Supply	Max. Current	Power Input	Dimension	Net Weight
HCCS-H64H2C1M	DC 12V	1A	2.4W	91 × 117 × 31(mm)	0.14kg

One-Click Remote Control

With our Hi-mit App, command your home on-the-go. Turn on the AC during your commute, enjoying the fresh breeze or chill the moment you step into your house. Experience the future of convenience, where your comfort is just a tap away.

Whole-house Voice Control

Hi-Smart H5 Series can be connected with Google and Amazon speakers for effortless voice control in your house. Wake up your devices with a simple voice command, adjusting power on/off, setting modes, temperatures, and fan speeds without lifting a finger, freeing you to enjoy a truly hands-free smart living experience.

Third-party Voice Platform







- 30

Outdoor Unit



	HP		4HP	5HP	6HP
	AC 1Φ, 220-240V/50/60Hz		AVW-41HJDH2H1	AVW-48HJDH2H1	AVW-54HJDH2H1
Model	AC 3Φ, 380-415V/50/60Hz		AVW-41HKDH2H1	AVW-48HKDH2H1	AVW-54HKDH2H1
		kW	12.1	14.0	15.5
0 "	Capacity	kBtu/h	41.5	48.0	53.0
Cooling	Power Input	kW	3.30	4.24	4.70
	EER	kW/kW	3.67	3.30	3.30
	SEER	kW/kW	8.20	7.90	7.90
	One of the (Marsilla on)	kW	14.2/12.1	16.0/14.0	18.0/15.5
	Capacity (Max/Nom)	kBtu/h	48.0//41.5	54.5/48.0	61.5/53.0
Heating	Power Input (Max/Nom)	kW	3.60/2.63	4.10/3.18	4.80/3.52
	COP (Max/Nom)	kW/kW	3.94/4.60	3.90/4.40	3.75/4.40
	SCOP	kW/kW	5.00	4.65	4.60
Air Flow Rate		m³/min	80	80	80
Sound Pressur	ound Pressure Level (Cooling/Heating)		52/52	53/53	54/54
Defilement	Туре	-		R32	
	Pre-charged Quantity	kg	2	2	2
\\/ai=lat	Net Weight (Single-phase/Three-phase)	kg	94/95	94/95	94/95
Weight	Gross Weight (Single-phase/Three-phase)	kg	109/110	109/110	109/110
D: .	Net (H×W×D)	mm	840 × 1100 × 390	840 × 1100 × 390	840 × 1100 × 390
Dimensions	Packing (H×W×D)	mm	1000 × 1185 × 530	1000 × 1185 × 530	1000 × 1185 × 530
Cabinet Color		-	Grayish White	Grayish White	Grayish White
	0	mm	15.88	15.88	15.88
Def Divises	Gas	inch	5/8	5/8	5/8
Ref. Piping	Limited	mm	9.53	9.53	9.53
	Liquid	inch	3/8	3/8	3/8
Connectable	Quantity	pcs	10	12	13
Indoor Units	Connection Ratio	-		30%~200%	
	Max. Piping Length	m	80	80	80
Piping	Piping Height Difference Between		50	50	50
Design			40	40	40
	Height Difference Between IDUs	m	15	15	15
Operation	Cooling	DB ℃		-10~52	
Range	Heating	WB/DB ℃		-25.5~15.5/-25~26	

Notes:

 $1. \ {\sf Rated cooling \ capacity \ and \ rated \ heating \ capacity \ are \ tested \ in \ the \ following \ conditions:}$

Cooling conditions: indoor air inlet temperature: 27°C DB 19°C WB, outdoor air inlet temperature: 35°C DB, pipe length: 7.5m, pipe height difference: 0m. Heating conditions: indoor air inlet temperature: 20°C DB, outdoor air inlet temperature: 7°C DB 6°C WB, pipe length: 7.5m, pipe height difference: 0m.





Note		HP		8HP	10HP	12HP	14HP	16HP
Power Supply		Model		AVW-76HKDHE2	AVW-96HKDHE2	AVW-114HKDHE2	AVW-136HKDHE2	AVW-154HKDHE2
Power Supply		Combination		AVW-76HKDHE2	AVW-96HKDHE2	AVW-114HKDHE2	AVW-136HKDHE2	AVW-154HKDHE2
Capacity Amino				1	/	/	1	1
Cooling Power Input KW 5.89 7.57 9.31 11.43 136.5 153.5		Power Supply			Α	С 3Ф, 380-415V/50/60	Hz	
Cooling Power Input kW 5.89 7.57 9.31 11.43 13.24 EER kW/kW 3.80 3.70 3.60 3.50 3.40 SEER - 7.97 8.57 8.53 7.57 7.43 Apacity (Max./Nom.) kW 25.022.4 31.528.0 37.533.5 45.040.0 50.045.0 Apacity (Max./Nom.) kW 5.324.457 7.005.96 19.157.70 10.989.30 12.2010.071 COP (Max./Nom.) kW 5.324.457 7.005.96 9.157.70 10.989.30 12.2010.071 COP (Max./Nom.) kW 5.324.457 7.005.96 9.157.70 10.989.30 12.2010.071 Apacity (Max./Nom.) kW/kW 4.704.90 4.504.70 4.104.35 4.104.30 4.104.20 Apacity (Max./Nom.) kW/kW 4.704.90 4.504.70 4.104.33 4.104.20 287 Apacity (Max./Nom.) 4.90 4.504.70 4.104.33 4.75 4		Capacity	kW	22.4	28.0	33.5	40.0	45.0
Fig.			kBtu/h	76.4	95.5	114.3	136.5	153.5
SEER	Cooling	Power Input	kW	5.89	7.57	9.31	11.43	13.24
Heating Paperly (Max./Nom.) KW 25.0/22.4 31.5/28.0 37.5/33.5 45.0/40.0 50.0/45.0		EER	kW/kW	3.80	3.70	3.60	3.50	3.40
Heating Power Input (Max./Nom.) Keltuh 85.3/76.4 107.5/95.5 127.9/114.3 153.5/136.5 170.6/153.5 Power Input (Max./Nom.) KW 5.32/4.57 7.005.96 9.15/7.70 10.98/9.30 12.20/10.71 COP (Max./Nom.) KW/kW 4.704.90 4.504.70 4.10/4.35 4.10/4.30 4.10/4.20 SCOP		SEER	-	7.97	8.57	8.53	7.57	7.43
Heating Power Input (Max/Nom) kW 5.32/4.57 7.005.96 9.157.70 10.999.30 12.20/10.71		Canacity (May /Nom)	kW	25.0/22.4	31.5/28.0	37.5/33.5	45.0/40.0	50.0/45.0
COP (Max/Nom.) KW/KW 4.70/4.90 4.50/4.70 4.10/4.35 4.10/4.30 4.10/4.20		Capacity (Max./Norn.)	kBtu/h	85.3/76.4	107.5/95.5	127.9/114.3	153.5/136.5	170.6/153.5
SCOP -	Heating	Power Input (Max./Nom.)	kW	5.32/4.57	7.00/5.96	9.15/7.70	10.98/9.30	12.20/10.71
Air Flow Rate		COP (Max./Nom.)	kW/kW	4.70/4.90	4.50/4.70	4.10/4.35	4.10/4.30	4.10/4.20
Sound Pressure Level (Cooling/Heating) dB(A) 54/57 55/58 55/58 61/62 62/65		SCOP	-	5.50	4.80	4.89	4.75	4.85
Refrigerant Type - R32 Weight Pre-charged Quantity kg 4.0 4.5 5.7 6.0 6.0 Weight Net Weight kg 191 192 193 215 216 Gross Weight kg 209 210 211 233 234 Dimensions Net (H×W×D) mm 1650×1250×440 1650×1250×440 1650×1250×440 Dimensions Net (H×W×D) mm 1810×1350×580 Grayish White Grayish White Base mm 22.2 22.2 25.4 25.4 28.6 Inch 7/8 7/8 8/8 8/8 9/8 Base mm 9.53 9.53 12.7 12.7 12.7 Connectable Indoor Units pcs 17 21 26 31 34 Connectable Indoor Units m 500 500 500 500 <td>Air Flow Rate</td> <td></td> <td>m³/min</td> <td>212</td> <td>212</td> <td>212</td> <td>287</td> <td>287</td>	Air Flow Rate		m³/min	212	212	212	287	287
Refrigerant Pre-charged Quantity kg 4.0 4.5 5.7 6.0 6.0 Weight Net Weight kg 191 192 193 215 216 Dimensions Net (H×W×D) mm 1650×1250×440 Packing (H×W×D) mm 1810×1350×580 Cabinet Color - Grayish White Ref. Piping Gas mm 22.2 22.2 25.4 28.6 Ref. Piping mm 9.53 9.53 12.7 12.7 12.7 Connectable Indoor Units Quantity pcs 17 21 26 31 34 Piping Design Total Piping Length m 500 500 500 500 Max. piping Length m 500 50 50 50 50 Height Difference between ODU and IDUs Between IDUs m 40 40 40 40 40 Page 100 Cooling DB D	Sound Pressure	Level (Cooling/Heating)	dB(A)	54/57	54/57 55/58 55/58 61/62			
Pre-charged Quantity kg		lefrigerant				R32		
Veight Gross Weight kg 209 210 211 233 234	Refrigerant -	Pre-charged Quantity	kg	4.0	4.5	5.7	6.0	6.0
Net (H × W × D) mm	Weight -	Net Weight	kg	191	192	193	215	216
Dimensions Packing (H × W × D) mm	Weight	Gross Weight	kg	209	210	211	233	234
Packing (H×W×D) mm 1810×1350×580 Cabinet Color ———————————————————————————————————		Net (H×W×D)	mm			1650 × 1250 × 440		
Ref. Piping Gas mm 22.2 22.2 25.4 25.4 28.6	Dimensions	Packing (H × W × D)	mm			1810 × 1350 × 580		
Ref. Piping Figure Figur	Cabinet Color		-			Grayish White		
Ref. Piping Inch 7/8 7/8 8/8 8/8 9/8			mm	22.2	22.2	25.4	25.4	28.6
Liquid mm 9.53 9.53 12.7 12.7 12.7 12.7		Gas	inch	7/8	7/8	8/8	8/8	9/8
Connectable Indoor Units Quantity pcs 17 21 26 31 34	Ref. Piping		mm	9.53	9.53	12.7	12.7	12.7
Connection Ratio Connection		Liquid	inch	3/8	3/8	4/8	4/8	4/8
Total Piping Length	Connectable	Quantity	pcs	17	21	26	31	34
Max. piping Length Max. pi	Indoor Units	Connection Ratio	-		I	30%~200%		
Max. piping Length (Actual) 150 150 150 150 150 150 150 150 150 150 150 150 150 150 150 150 150 150 165 16		Total Piping Length	m	500	500	500	500	500
Piping Design				150	150	150	150	150
Height difference between ODU and IDU France CODU Down 50 50 50 50 50 50 50 5	Piping Design	ıvıax. piping Length	m	165	165	165	165	165
Telight Difference Debtween ODU and IDU The Debtween ODU and IDU The Debtween ODU and IDU The Debtween IDU The Debtween IDU The Debtween IDU The Debtween IDU Debtween IDU		Hoight difference	m					
Height Difference Between IDUs m 40 40 40 40 40 40 Operation Range		between ODU and IDU	m					
Operation Range Cooling DB -10~55°C		Height Difference Between IDUs						
Range Heating WB/DB -25~16.5°C/-24~23°C	Operation		DB					
	Range					-25~16.5°C/-24~23°C		

Notes:

1. Rated cooling capacity and rated heating capacity are tested in the following conditions:

Cooling Conditions: indoor air inlet temperature: 27°C DB 19°C WB, outdoor air inlet temperature: 35°C DB, pipe length: 7.5m, pipe height difference: 0m. Heating Conditions: indoor air inlet temperature: 20°C DB, outdoor air nlet temperature: 7°C DB 6°C WB, pipe Length: 7.5m, pipe height difference: 0m.

- 2. The above performance data is obtained on the the basis of the performance of this outdoor unit, with a 100%-combination of 4-Way Cassette indoor units.
- 3. The above noise values are measured in the anechoic chamber without reflected echo, therefore the impact of the reflected echo must be included at the scene. Measurement point: 1m from the service cover surface and 0.92m from the floor level.
- Measurement point: 1m from the service cover surface and 0.92m from the floor

 4. The final appearance of outdoor units is subject to the actual products.
- 4. The final appearance of outdoor units is subject to the actual products.5. The dip switch DSW1-4 of outdoor PCB must set ON. This value is measured from the air outlet grille of the outdoor unit.
- $6. \ Under \ cooling \ operation, \ where \ the \ temperature \ is \ higher \ than \ 52 ^{\circ}\!C, \ the \ system \ may \ work \ under \ intermittent \ operation.$
- 7. A match ratio from 150% to 200% is allowed for cooling only.

*1 If you have any questions, please contact with the technical engineer.

^{2.} During cooling (48~52°C) or heating (23~26°C) operations, the unit may operate intermittently.

^{3.} The above performance data is obtained on the basis of the performance of this outdoor unit, with a 100%–combination of 4–way cassette indoor units.

^{4.} A match ratio from 150% to 200% is allowed for cooling only.




Outdoor Unit

	Model					
			AVW-170HKDHE2	AVW-190HKDHE2	AVW-212HKDHE2	AVW-232HKDHE2
	Combination		AVW-76HKDHE2	AVW-96HKDHE2	AVW-96HKDHE2	AVW-114HKDHE2
			AVW-96HKDHE2	AVW-96HKDHE2	AVW-114HKDHE2	AVW-114HKDHE2
	Power Supply			AC 3Φ, 380-	415V/50/60Hz	
(Capacity	kW	50.4	56.0	61.5	67.0
_		kBtu/h	171.9	191.0	209.8	228.6
Cooling F	Power Input	kW	13.5	15.1	16.9	18.6
E	EER	kW/kW	3.74	3.70	3.64	3.60
5	SEER	kW/kW	8.29	8.57	8.55	8.53
	Canacity (May (Nam)	kW	56.5/50.4	63.0/56.0	69.0/61.5	75.0/67.0
	Capacity (Max./Nom.)	kBtu/h	192.8/171.9	215.0/191.0	235.4/209.8	255.9/228.6
Heating F	Power Input (Max./Nom.)	kW	12.3/10.5	14.0/11.9	16.1/13.7	18.3/15.4
	COP (Max./Nom.)	kW/kW	4.59/4.79	4.50/4.70	4.27/4.50	4.10/4.35
5	SCOP	kW/kW	5.09	4.80	4.85	4.89
Air Flow Rate		m³/min	424	424	424	424
Sound Pressure Lev	vel (Cooling/Heating)	dB(A)	55/58	55/58	55/58	55/58
Т. Т	Туре	-		R	32	
Refrigerant –	Pre-charged Quantity	kg	9	9	10	11
	Net Weight	kg	383	384	385	386
Weight —	Gross Weight	kg	419	420	421	422
	Net (H×W×D)	mm		+1250) ×440		
Dimensions –	Packing (H×W×D)	mm		1810× (1350	+1350) ×580	
Cabinet Color		-		Grayish	n White	
	_	mm	28.6	28.6	28.6	28.6
	Gas	inch	9/8	9/8	9/8	9/8
Ref. Piping —		mm	15.88	15.88	15.88	15.88
L	Liquid	inch	5/8	5/8	5/8	5/8
Connectable	Quantity	pcs	36	40	44	48
Connectable Indoor Units	Connection Ratio	-		30%~	200%	<u> </u>
	Total Piping Length	m	500	500	500	500
_		m (Actual)	150	150	150	150
	Max. piping Length	m (Equivalent)	165	165	165	165
Piping Design —	Height difference	m (ODU Up)	50	50	50	50
b	neight difference between ODU and IDU	m (ODU Down)	40	40	40	40
	Height Difference Between IDUs	m	40	40	40	40
	Cooling	DB		-10~	55℃	<u> </u>
Range	Heating	WB/DB		-25~16.5°C	C/−24~23°C	

- Notes:

 1. Rated cooling capacity and rated heating capacity are tested in the following conditions:
- Cooling Conditions: indoor air inlet temperature: 27°C DB 19°C WB, outdoor air inlet temperature: 35°C DB, pipe length: 7.5m, pipe height difference: 0m. Heating Conditions: indoor air inlet temperature: 20°C DB, outdoor air nlet temperature: 7°C DB 6°C WB, pipe Length: 7.5m, pipe height difference: 0m.
- 2. The above performance data is obtained on the the basis of the performance of this outdoor unit, with a 100%-combination of 4-Way Cassette indoor units.
- 3. The above noise values are measured in the anechoic chamber without reflected echo, therefore the impact of the reflected echo must be included at the scene. Measurement point: 1m from the service cover surface and 0.92m from the floor level.
- 4. The final appearance of outdoor units is subject to the actual products.
- 5. The dip switch DSW1-4 of outdoor PCB must set ON. This value is measured from the air outlet grille of the outdoor unit.
- 6. Under cooling operation, where the temperature is higher than 52°C, the system may work under intermittent operation.
- 7. A match ratio from 150% to 200% is allowed for cooling only.
- If you have any questions, please contact with the technical engineer.





	HP		26HP	28HP	30HP	32HP
	Model		AVW-250HKDHE2	AVW-272HKDHE2	AVW-290HKDHE2	AVW-308HKDHE2
	Combination		AVW-114HKDHE2	AVW-136HKDHE2	AVW-136HKDHE2	AVW-154HKDHE2
			AVW-136HKDHE2	AVW-136HKDHE2	AVW-154HKDHE2	AVW-154HKDHE2
	Power Supply			AC 3Φ, 380-	415V/50/60Hz	
	Capacity	kW	73.5	80.0	85.0	90.0
		kBtu/h	250.8	273.0	290.0	307.0
Cooling	Power Input	kW	20.7	22.9	24.7	26.5
	EER	kW/kW	3.54	3.50	3.45	3.40
	SEER	kW/kW	7.98	7.57	7.50	7.43
		kW	82.5/73.5	90.0/80.0	95.0/85.0	100.0/90.0
	Capacity (Max./Nom.)	kBtu/h	281.5/250.8	307.1/273.0	324.2/290.0	341.2/307.0
Heating	Power Input (Max./Nom.)	kW	20.1/17.0	22.0/18.6	23.2/20.0	24.4/21.4
	COP (Max./Nom.)	kW/kW	4.10/4.32	4.10/4.30	4.10/4.25	4.10/4.20
	SCOP	kW/kW	4.81	4.75	4.80	4.85
Air Flow Rate		m³/min	499	574	574	574
Sound Pressure	Level (Cooling/Heating)	dB(A)	59/60	61/62	62/64	62/65
	Туре	-		R	32	
Refrigerant	Pre-charged Quantity	kg	12	12	12	12
	Net Weight	kg	408	430	431	432
Weight	Gross Weight	kg	444	466	467	468
	Net (H×W×D)	mm		1650× (1250	+1250) ×440	
Dimensions	Packing (H×W×D)	mm		1810× (1350	+1350) ×580	
Cabinet Color		_		Grayish	n White	
		mm	31.75	31.75	31.75	31.75
	Gas	inch	10/8	10/8	10/8	10/8
Ref. Piping		mm	19.05	19.05	19.05	19.05
	Liquid	inch	6/8	6/8	6/8	6/8
Dannast-III.	Quantity	pcs	52	56	60	64
Connectable ndoor Units	Connection Ratio	_		30%~		
	Total Piping Length	m	500	500	500	500
		m (Actual)	150	150	150	150
	Max. piping Length	m	165	165	165	165
Piping Design		(Equivalent) m	50	50	50	50
	Height difference between ODU and IDU	(ODU Up) m	40	40	40	40
	Height Difference	(ODU Down)	40	40	40	40
	Between IDUs Cooling	DB	70	-10~		40
Operation Range	Cooling	WB/DB				

- 1. Rated cooling capacity and rated heating capacity are tested in the following conditions:
- Cooling Conditions: indoor air inlet temperature: 27°C DB 19°C WB, outdoor air inlet temperature: 35°C DB, pipe length: 7.5m, pipe height difference: 0m. Heating Conditions: indoor air inlet temperature: 20°C DB, outdoor air nlet temperature: 7°C DB 6°C WB, pipe Length: 7.5m, pipe height difference: 0m.
- 2. The above performance data is obtained on the the basis of the performance of this outdoor unit, with a 100%-combination of 4-Way Cassette indoor units.
- 3. The above noise values are measured in the anechoic chamber without reflected echo, therefore the impact of the reflected echo must be included at the scene. Measurement point: 1m from the service cover surface and 0.92m from the floor level.
- 4. The final appearance of outdoor units is subject to the actual products.
- 5. The dip switch DSW1-4 of outdoor PCB must set ON. This value is measured from the air outlet grille of the outdoor unit.
- 6. Under cooling operation, where the temperature is higher than 52°C, the system may work under intermittent operation.
- 7. A match ratio from 150% to 200% is allowed for cooling only.
- *1 If you have any questions, please contact with the technical engineer.




Indoor Units Feature Overview

					,	Accessorie	s			
Unit	Drain Pump (built-in)	Drain Pump (external)	3D Airflow Panel	Filter	Humidity Sensor	AirPure Kit	Motion Sensor	Hi-Motion	Outlet Air Temp Sensor	Float Switch
4-Way Cassette	•	0	×	•	0	0	0	0	•	•
Mini 4-Way Cassette	•	0	×	•	0	0	0	0	•	•
Ceiling Ducted (DC Low-height)	•	0	0	•	0	0	×	0	•	•
Ceiling Ducted (DC High Static Pressure) AVD-07~AVD-54	0	0	×	•	0	0	×	0	•	•
Ceiling Ducted (DC High Static Pressure) AVD-76 & AVD-96	0	0	×	0	0	0	×	0	•	•
Wall Mounted	×	×	×	•	0	•	×	0	•	×

						Feat	tures					
Unit	Dry Contact Input	Windows Linkage	Dry Contact Output	Fresh Air Intake	Sleep	Quiet	ECO	Individual Louver Control	Breeze Mode	Self Cleaning	Auto Fan Speed	Dynamic ESP
4-Way Cassette	•	•	•	•	•	•	•	•	•	•	•	×
Mini 4-Way Cassette	•	•	•	•	•	•	•	•	•	•	•	×
Ceiling Ducted (DC Low-height)	•	•	•	•	•	•	•	×	×	•	•	×
Ceiling Ducted (DC High Static Pressure) AVD-07~AVD-54	•	•	•	•	•	•	•	×	×	•	•	•
Ceiling Ducted (DC High Static Pressure) AVD-76 & AVD-96	•	•	•	×	•	•	•	×	×	•	•	•
Wall Mounted	•	•	•	×	•	•	•	×	×	•	•	×


Remarks: Standard: ● Optional: ○ Incompatible: X

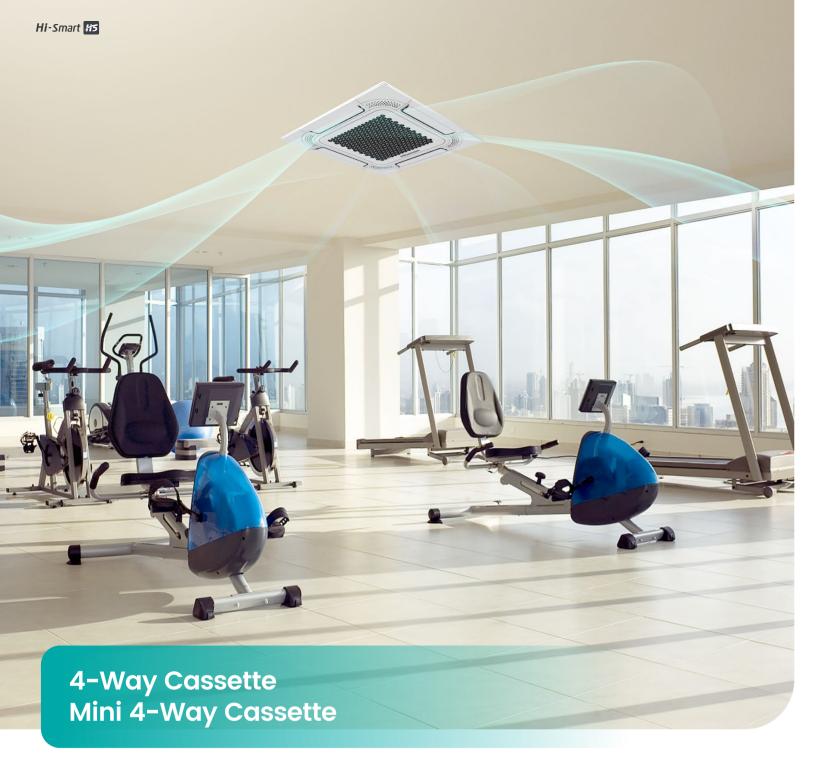




4-way cassette louvers now offer individual control, allowing you to customize airflow direction based on diverse needs, applications, and installation layouts. Each louver has 7 angle settings with a maximum reach of 64°, providing flexibility in



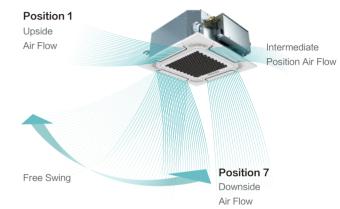



Under the newly designed breeze mode, the cool air is gently released through the micro holes in the panel, avoiding direct airflow onto individuals and ensuring a more even and comfortable airflow.

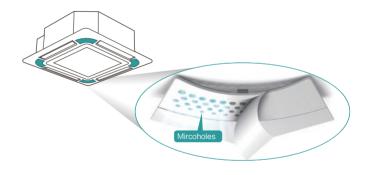



Individual Louvers Control



Comfort **Cooling Mode**



Breeze Mode



Higher Installation



Motion Sensor



Dry Contact Interlock



Compact and Classy Design






Fresh Air Intake



Even at ceiling heights as high as 4.2m, the cassette unit effectively directs airflow downward.

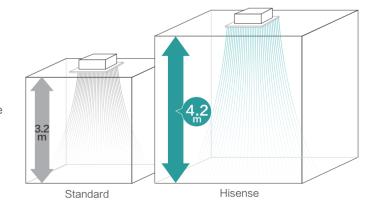



Compact and Classy Design

The 4-way cassette is as slim as 238mm, and the mini 4-way cassette is only 215mm, making them suitable for narrow ceiling spaces. The newly designed panel seamlessly integrates with indoor aesthetics.






4-way Cassette

Mini 4-way Cassette




Motion Sensor

The motion sensor can detect human presence, automatically activating or deactivating the cassette unit and adjusting airflow based on settings configured on the controller. During peak occupancy, the set temperature is automatically adjusted downward, and vice versa, ensuring comfort while optimizing energy consumption as needed.

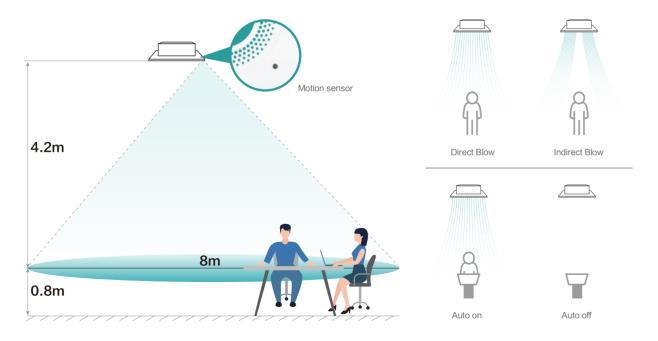




The comfort cooling mode is to provide more soft and gentle air, keeping the room at a comfortable temperture and in a quiet environment.

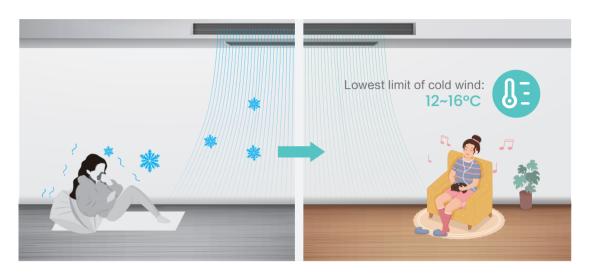



Third party devices to control the on-off air conditioners is possible with dry contact connections to the Indoor unit. Devices like room key card, window contact and fire alarms can be connected simultaneously.

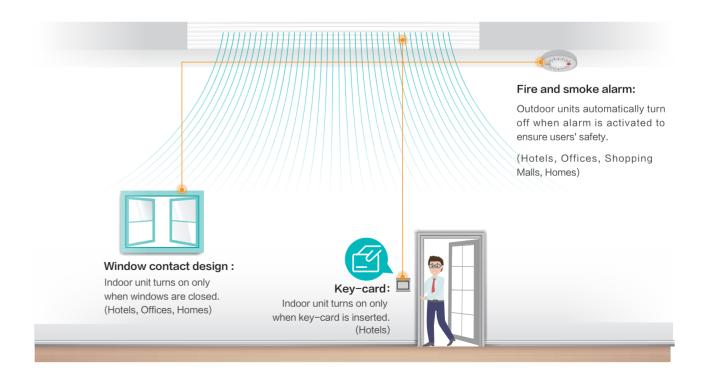



4-Way Cassette



Model			AVBC-09 HJDBA	AVBC-12 HJDBA	AVBC-15 HJDBA	AVBC-19 HJDBA	AVBC-22 HJDBA	AVBC-24 HJDBA	AVBC-27 HJDBA	AVBC-30 HJDBA	AVBC-38 HJDBA	AVBC-48 HJDBA	AVBC-54 HJDBA
Power suppl	ly					,	AC 1Φ,	220V~240V/5	0Hz/60Hz	,		,	
	0 "	kW	2.8	3.6	4.5	5.6	6.3	7.1	8.0	9.0	11.2	14.0	16.0
	Cooling	Btu/h	9,600	12,300	15,300	19,100	21,500	24,200	27,300	30,700	38,200	47,800	54,600
Capacity		kW	3.2	4.0	5.0	6.3	7.1	8.0	9.0	10.0	12.5	16.0	18.0
	Heating	Btu/h	10,900	13,700	17,100	21,500	24,200	27,300	30,700	34,100	42,700	54,600	61,400
	Cooling	W	20	30	40	50	50	60	70	70	80	130	130
Power Input	t Heating	W	20	30	40	50	50	60	70	70	80	130	130
0 I D		JD(A)	30/28/28/	32/29/29/	33/31/29/	34/31/30/	36/33/32/	36/33/32/	37/36/35/	37/36/35/	42/40/38/	46/44/40/	46/44/41/
Sound Press	sure	dB(A)	27/26/26	28/27/26	29/27/26	28/28/26	31/29/28	31/29/28	33/31/30	33/31/30	36/34/33	38/36/34	40/38/36
			15.0/12.8/	17.0/14.0/	19.0/15.0/	19.0/15.0/	26.0/20.0/	27.0/21.1/	25.0/21.1/	25.0/22.3/	31.0/29.5/	37.0/33.5/	37.0/34.0/
Air Flow Rat	te	m³/min	12.0/10.8/	12.8/11.8/	13.9/12.6/	13.9/12.6/	18.3/17.0/	19.1/18.0/	19.6/17.9/	20.3/18.3/	28.7/26.0/	29.6/27.2/	30.7/28.9/
			10.0/8.8	10.8/9.1	11.4/10.5	11.8/10.5	15.1/13.0	15.8/14.7	16.1/14.7	16.9/15.3	23.5/20.5	24.2/22.4	25.6/23.8
	Connection Type	-					Flare-nut	Connection(wit	h Flare Nuts)				
		mm	Ф6.35	Φ6.35	Φ6.35	Φ6.35	Φ6.35	Φ9.53	Ф9.53	Φ9.53	Φ9.53	Φ9.53	Φ9.53
	Liquid	inch	(1/4)	(1/4)	(1/4)	(1/4)	(1/4)	(3/8)	(3/8)	(3/8)	(3/8)	(3/8)	(3/8)
Piping		mm	Ф12.7	Ф12.7	Ф12.7	Ф12.7	Ф12.7	Φ15.88	Ф15.88	Ф15.88	Ф 15.88	Ф15.88	Φ15.88
	Gas	inch	(1/2)	(1/2)	(1/2)	(1/2)	(1/2)	(5/8)	(5/8)	(5/8)	(5/8)	(5/8)	(5/8)
	Condensate Drain	-						O.D. 32					
	Net Weight	kg	20	20	20	20	21	21	23	23	26	26	26
Weight	Gross Weight	kg	24	24	24	24	25	25	27	27	31	31	31
		H mm	238	238	238	238	238	238	238	238	288	288	288
	External	W mm	840	840	840	840	840	840	840	840	840	840	840
Dimensions		D mm	840	840	840	840	840	840	840	840	840	840	840
Dimensions		H mm	292	292	292	292	292	292	292	292	342	342	342
	Packaging	W mm	945	945	945	945	945	945	945	945	945	945	945
		D mm	945	945	945	945	945	945	945	945	945	945	945
	Model	-						HPE-GNK1					
	Color	-						Neutral White					
	Body	H mm	47	47	47	47	47	47	47	47	47	47	47
	*	W mm	950	950	950	950	950	950	950	950	950	950	950
Decoration	Dilligligions	D mm	950	950	950	950	950	950	950	950	950	950	950
Panel		H mm	100	100	100	100	100	100	100	100	100	100	100
		W mm	1022	1022	1022	1022	1022	1022	1022	1022	1022	1022	1022
	Dimensions	D mm	1022	1022	1022	1022	1022	1022	1022	1022	1022	1022	1022
	Net Weight	kg	5.7	5.7	5.7	5.7	5.7	5.7	5.7	5.7	5.7	5.7	5.7
	Gross Weight	kg	8.0	8.0	8.0	8.0	8.0	8.0	8.0	8.0	8.0	8.0	8.0

- 1. The nominal cooling capacity and heating capacity are based on following conditions: Cooling Operation Conditions Indoor Air Inlet Temperature: 27°C DB (80°F DB), 19.0°C WB (66.2°F WB)
- Outdoor Air Inlet Temperature: 35°C DB (95°F DB) Piping Length: 7.5 Meters Piping Lift: 0 Meter

Heating Operation Conditions

Indoor Air Inlet Temperature: 20°C DB (68°F DB)

Outdoor Air Inlet Temperature: 7°C DB (45°FDB), 6°C WB (43°F WB)

2. The sound pressure level is based on following conditions: 1.5m beneath the unit. The above data was measured in an anechoic chamber so that reflected sound should be taken into consideration in the field.





Model			AVC-05HJDBA	AVC-07HJDBA	AVC-09HJDBA	AVC-12HJDBA	AVC-15HJDBA	AVC-17HJDBA	AVC-19HJDBA
Power supp	ply				AC	1 Φ , 220V~240V/50Hz/	60Hz		
	O a a l'a a	kW	1.5	2.2	2.8	3.6	4.5	5.0	5.6
	Cooling	Btu/h	5,100	7,500	9,600	12,300	15,300	17,000	19,100
Capacity	Hartin	kW	2.0	2.5	3.3	4.2	5.0	5.6	6.3
	Heating	Btu/h	6,800	8,500	11,200	14,300	17,000	19,100	21,500
_	Cooling	W	14	14	14	16	22	30	40
Power Input	t Heating	W	14	14	14	16	22	30	40
Sound Pres	ssure	dB(A)	30/29/28/26	30/29/28/26	32/30/28/26	34/32/29/26	38/36/31/28	42/39/36/31	45/42/38/34
Air Flow Ra	ite	m³/min	7.2/6.5/6.2/5.6	7.2/6.5/6.2/5.6	7.8/7.2/6.5/5.8	7.8/7.2/6.5/5.8	9.3/8.7/7.1/6.7	11.0/9.5/8.7/7.1	12.5/10.8/9.3/8.0
	Connection Type	-			Flare-n	ut Connection(with Fla	re Nuts)		
	1 South	mm	Φ6.35	Φ6.35	Φ6.35	Φ6.35	Φ6.35	Φ6.35	Φ6.35
Dining	Liquid	inch	(1/4)	(1/4)	(1/4)	(1/4)	(1/4)	(1/4)	(1/4)
Piping	Con	mm	Ф12.7	Ф12.7	Φ12.7	Φ12.7	Ф 12.7	Ф12.7	Ф12.7
	Gas	inch	(1/2)	(1/2)	(1/2)	(1/2)	(1/2)	(1/2)	(1/2)
	Condensate Drain	-				O.D. 32			
	Net Weight	kg	14.5	14.5	14.8	14.8	15.8	15.8	15.8
Weight	Gross Weight	kg	17.3	17.3	17.6	17.6	18.6	18.6	18.6
		H mm	215	215	215	215	215	215	215
	External	W mm	570	570	570	570	570	570	570
Dimensions		D mm	570	570	570	570	570	570	570
Diffictions		H mm	292	292	292	292	292	292	292
	Packaging	W mm	730	730	730	730	730	730	730
		D mm	668	668	668	668	668	668	668
	Model					HPE-DNK1			
	Color					Neutral White			
	Body	H mm	37	37	37	37	37	37	37
		W mm	620	620	620	620	620	620	620
Decoration		D mm	620	620	620	620	620	620	620
Panel	Packaging	H mm	115	115	115	115	115	115	115
		W mm	690	690	690	690	690	690	690
		D mm	680	680	680	680	680	680	680
	Net Weight	kg	2.7	2.7	2.7	2.7	2.7	2.7	2.7
	Gross Weight	kg	4.0	4.0	4.0	4.0	4.0	4.0	4.0

- 1. The nominal cooling capacity and heating capacity are based on following conditions: Cooling Operation Conditions
- Indoor Air Inlet Temperature: 27°C DB (80°F DB), 19.0°C WB (66.2°F WB)

Outdoor Air Inlet Temperature: 35°C DB (95°F DB)
Piping Length: 7.5 Meters Piping Lift: 0 Meter

Heating Operation Conditions

Indoor Air Inlet Temperature: 20°C DB (68°F DB) Outdoor Air Inlet Temperature: 7°C DB (45°F DB), 6°C WB (43°F WB) 2. The sound pressure level is based on following conditions: 1.5m beneath the unit. The above data was measured in an anechoic chamber so that reflected sound should be taken into consideration in the field.





Installation Friendly



ESP 10/30/50Pa



Low Height:192mm



Setback Function



Self-cleaning



Humidity Sensor



Low Noise




Comfort Cooling Mode



The indoor units feature an intelligent self-cleaning function that efficiently clears the heat exchangers without manual intervention, saving your valuable time and cost. It prevents dusts and potentially-harmful substances from accumulating on the surface to ensure clean and healthy air supply.



Available air return as rear or bottom entry, consumers can choose relevant air return mode according to the practical installation space.

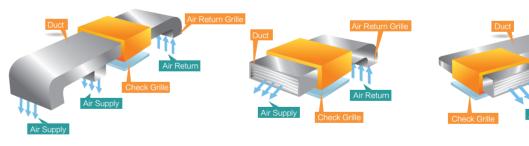

Ceiling Supply Bottom Return

Side Supply Bottom Return

Side Supply Side Return





Low-height Ceiling Ducted unit is as slim as 192mm, fitting into the narrowest ceiling spaces. Save ceiling spaces for higher room height without compromising user's comfort and satisfaction.





Low Noise

Embrace the whisper-quiet operation of Hisense ceiling ducted units, where sound levels dip to as low as 21dB (A), softer than a rustling leaf. Our technology redefines your peaceful living by ensuring your comfort is never compromised by unwanted noise.





Setback Function


The setback function, designed for when you leave home, includes anti–freezing to maintain indoor temperatures above $8\,^\circ\!\text{C}$ and anti–mold through intermittent dehumidification.





Comfort Cooling Mode


The indoor unit can achieve comfortable cooling by setting a minimum air outlet temperature, and the system will intelligently adjust the operating frequency to ensure that users obtain a comfortable and efficient environment.

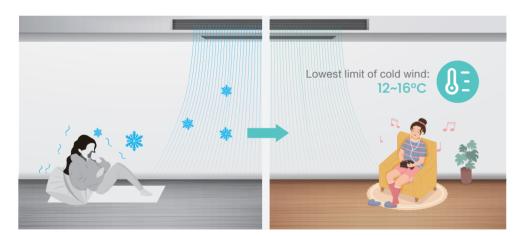




Humidity Sensor(Optional)

Dehumidification can be achieved automatically and precisely with humidity sensor, effectively inhibit bacteria growth and create a more comfortable and healthier environment.

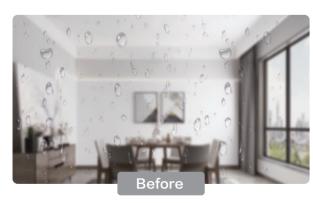

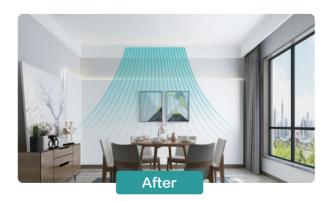





Model				AVE-05HJDDH	AVE-07HJDDH	AVE-09HJDDH	AVE-12HJDDH	AVE-15HJDDH	AVE-19HJDDH	AVE-24HJDDH				
Power supply						AC 1	Φ, 220V~240V/50Hz	z/60Hz						
	0 5		kW	1.7	2.2	2.8	3.6	4.5	5.6	7.1				
Capacity	Cooling		Btu/h	5,800	7,500	9,600	12,300	15,300	19,100	24,200				
Capacity	Heating		kW	1.9	2.5	3.2	4.0	5.0	6.3	8.0				
	пеашу		Btu/h	6,500	8,500	11,300	13,600	17,100	21,500	27,300				
Dower longt	Cooling		W	30	30	50	50	60	60	90				
Power Input	Heating		W	30	30	50	50	60	60	90				
Sound Pressu	ire		dB(A)	28/27/26/24/23/21	28/27/26/24/23/21	35/32/32/30/26/23	35/32/32/30/26/23	35/32/32/30/26/23	35/32/30/28/25/23	38/36/35/33/31/24				
Air Flow Rate			m³/min	7.0/6.5/6.1/	7.0/6.5/6.1/	9.0/8.1/7.3/	9.0/8.1/7.3/6.7/	12.0/10.8/9.4/	13.5/12.5/11.2/	18.0/16.1/14.3/				
7 III T TOW T CALC			111 /111111	5.7/5/3/4.8	5.7/5/3/4.8	6.7/5.9/5.2	5.9/5.2	8.1/6.8/5.5	10.0/8.8/7.7	12.3/10.5/8.7				
External Station	Pressure		Pa				10(10-30-50)							
	Connection Typ	ре	-		Flare-nut Connection(with Flare Nuts)									
	Liquid		mm	Φ6.35	Ф6.35	Φ6.35	Φ6.35	Ф6.35	Φ6.35	Ф9.53				
Piping	Liquiu		inch	(1/4)	(1/4)	(1/4)	(1/4)	(1/4)	(1/4)	(3/8)				
	Gas		mm	Ф12.7	Ф12.7	Ф12.7	Φ12.7	Ф12.7	Ф 15.88	Φ15.88				
	000		inch	(1/2)	(1/2)	(1/2)	(1/2)	(1/2)	(5/8)	(5/8)				
	Condensate Dr	ain	-				I.D.32							
Maight	Net Weight		kg	16	16	17	17	20	24	24				
Weight	Gross Weight		kg	19	19	20	20	24	29	29				
	External	Н	mm	192	192	192	192	192	192	192				
	Dimension	W	mm	700	700	700	700	910	1180	1180				
Dimensions	Difficusion	D	mm	447	447	447	447	447	447	447				
210101010	Packaging	Н	mm	270	270	270	270	270	270	270				
		W	mm	925	925	925	925	1136	1406	1406				
	Dimensions	D	mm	574	574	574	574	574	574	574				

Notes

- The nominal cooling capacity and heating capacity are based on the following conditions:
 Cooling Operation Conditions
 Indoor Air Inlet Temperature: 27°C DB (80°F DB), 19.0°C WB (66.2°F WB)
 Outdoor Air Inlet Temperature: 35°C DB (95°F DB)
 Piping Length: 7.5 Meters Piping Lift: 0 Meter
 Heating Operation Conditions
 Indoor Air Inlet Temperature: 20°C DB (68°F DB)
- Outdoor Air Inlet Temperature: 7°C DB (45°F DB), 6°C WB (43°F WB)
- The sound pressure level is based on the following conditions: 1.5m beneath the unit.
 The above data was measured in an anechoic chamber so that the reflected sound should be taken into consideration in the field.

46 — 47 —





Auto-adjust ESP



Setback Function



Comfortable Cooling Mode



Low Noise



Self-cleaning



Precise Temperature Control



Dry Contact Interlock



Humidity Sensor




Fresh Air Intake



Main-sub Control

Auto-adjust ESP


After installation, the actual duct resistance frequently differ from the initially calculated, causing the actual air flow too low or too high. The auto-adjust ESP function can automatically select the most appropriate ESP value according to the actual duct resistance.

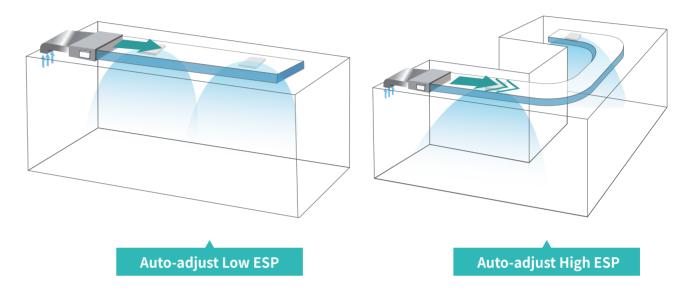

1

Comfort Cooling Mode


The indoor unit can achieve comfortable cooling by setting a minimum air outlet temperature, and the system will intelligently adjust the operating frequency to ensure that users obtain a comfortable and efficient environment.

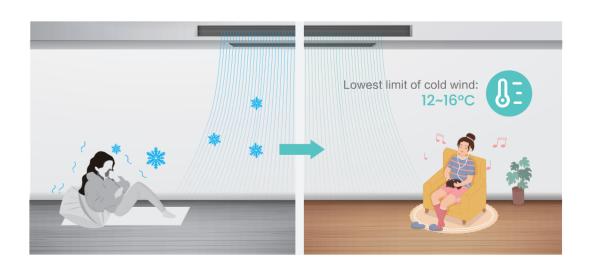



Main-sub Control

Thanks to the main—sub configuration, the sub units can automatically align with the main unit's mode setting, temperature setting, or both, once the main unit is set.

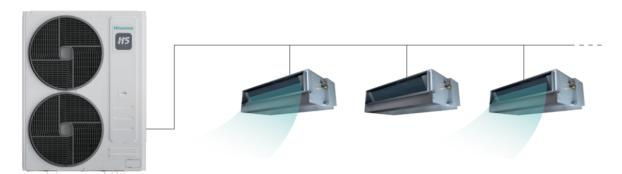

Main	Sub	Sub	
Cooling	Heating	Cooling	
✓	×	✓	

Humidity Sensor(Optional)

Dehumidification can be achieved automatically and precisely with humidity sensor, effectively inhibit bacteria growth and create a more comfortable and healthier environment.






Before After


Dry Contact Interlock

Third party devices to control the on-off air conditioners is possible with dry contact connections to the Indoor unit. Devices like room key card, window contact and fire alarms can be connected simultaneously.

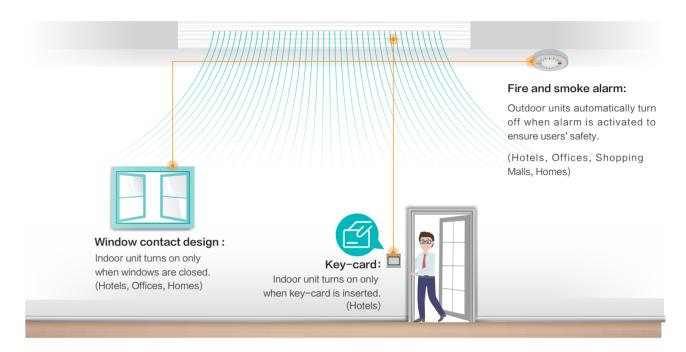



Featured with self-cleaning technology, the evaporator can be self-cleaned automatically just with the tap of a button in the controller, which is very convenient and saves the cost of manual cleaning, while ensuing a clean environment.

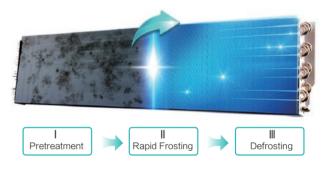

3 processes for deep cleaning



The setback function, designed for when you leave home, includes anti-freezing to maintain indoor temperatures above 8°C and anti-mold through intermittent dehumidification.








Precise Temperature Control

Two temperature sensor are installed into the unit to send real-time signals to the controllers for a more precise temperature control.

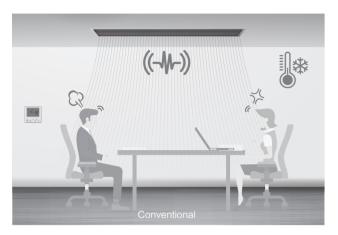






Low Noise


Hisense VRF offers indoor units with sound pressure level as low as 19dB(A), perfectly blending into library, auditorium and hospital rooms where require sound level lower than 25dB(A).

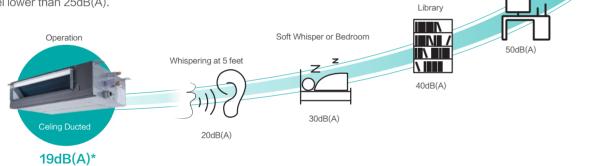




Fresh Air Intake

There is a fresh air duct opening reserved in the unit for 10% free fresh air introductory directly from outdoor, providing fresh air to the indoor continuously.

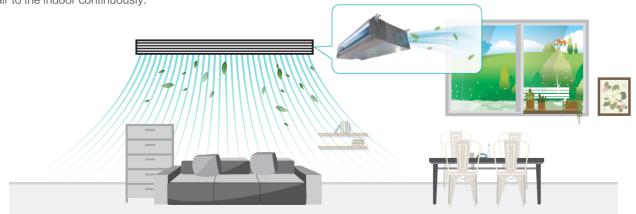



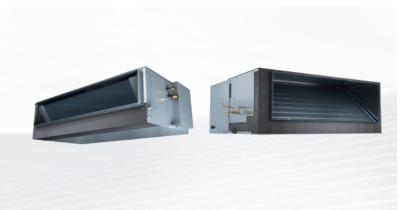

			AVD-07	AVD-09	AVD-12	A)/D 15	A)/D 10	AVD-24	A)/D 24	AVD-30	AVD-38	AVD-42	AVD-48	AVD-54	AVD-76	A\/D 06
Model			HJDH	HJDH	HJDH	AVD-15 HJDH	AVD-19 HJDH	HJDH	AVD-24 HJDH1	HJDH	HJDH	HJDH	HJDH	HJDH	HJDH	AVD-96 HJDH
Power Supply	1								AC 1Φ, 220)V~240V/50H	Iz/60Hz					
	Cooling	kW	2.2	2.8	3.6	4.5	5.6	7.1	7.1	9.0	11.2	12.5	14.0	16.0	22.4	28.0
Capacity	Cooling	Btu/h	7,500	9,600	12,300	15,400	19,100	24,200	24,200	30,800	38,000	42,500	48,000	54,500	76,500	95,600
oupuony	Heating	kW	2.5	3.2	4.0	4.6	6.3	8.0	8.0	10.0	12.5	14	16.0	18.0	25.0	31.5
	riousing	Btu/h	8,500	10,900	13,700	17,100	21,600	27,400	27,400	34,200	42,500	48,000	54,500	61,500	85,300	107,500
Power Input	Cooling	W	40	40	55	55	55	82	74	100	132	180	180	223	610	830
	Heating	W	40	40	55	55	55	82	74	100	132	180	180	223	610	830
Sound Pressu	ure Level	dB(A)	30/27/23/ 21/20/19	30/27/23/ 21/20/19	35/33/32/ 28/26/24	35/33/32/ 28/26/24	33/30/27/ 25/23/22	36/34/31/ 28/24/22	33/31/28/ 25/23/21	34/32/30/ 28/25/22	37/35/31/ 29/26/23	38/36/34/ 31/29/26	38/36/34/ 31/29/26	41/38/35/ 33/30/27	49/48/47/ 46/45/44	53/52/50/ 49/47/45
Airflow Rate		m³/min	9/8/6.8/ 6.3/5.8/5.3	9/8/6.8/ 6.3/5.8/5.3	12/11/10/ 9/8/7.2	12/11/10/ 9/8/7.2	14.5/13/11.5/ 10.5/9.5/8.7	19/17/15/ 13/11/9.5	20.6/19/17/ 15/13.8/12.5	25/23/21/ 19/17/15	28/25/23/ 21/19/17	35.5/32.5/29.5/ 26.5/23.5/20.5	35.5/32.5/29.5/ 26.5/23.5/20.5	39/35.5/31/ 26.5/23.5/21.8	57/54/52/ 51/49/48	72/68/65/ 61/58/50
External Stati	c Pressure	Pa	3	0 (30/40/50/6	60/70/80/90/1	100/110/120/	130/140/150)	50 (50	50 (50/60/70/80/90/100/110/120/130/140/150/160/170/180/190/200)			100)	150(50~250)	150(50~250)	
	Connection Type	-		Flare-Nut Connection(With Flare Nut) Brazing							zing					
	Limid	mm	Φ6.35	Φ6.35	Φ6.35	Φ6.35	Φ6.35	Ф9.53	Φ9.53	Ф9.53	Ф9.53	Ф9.53	Φ9.53	Ф9.53	Ф9.53	Ф9.53
p	Liquid	inch	1/4	1/4	1/4	1/4	1/4	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8
Piping		mm	Φ12.7	Ф12.7	Ф12.7	Ф12.7	Ф15.88	Ф15.88	Ф15.88	Ф15.88	Ф15.88	Ф15.88	Ф15.88	Ф15.88	Φ22.2 (Φ19.05*1)	Ф22.2
	Gas	inch	1/2	1/2	1/2	1/2	5/8	5/8	5/8	5/8	5/8	5/8	5/8	5/8	7/8 (3/4*1)	7/8
	Condensate Drain	-							I.D. 32							
Weight	Net Weight	kg	23	23	24	24	30	30	40	40	40	49	49	49	104	104
Weight	Gross Weight	kg	29	29	29	29	37	37	48	48	48	57	57	57	125	125
		H mm	270	270	270	270	270	270	300	300	300	300	300	300	470	470
	External	W mm	650+75	650+75	650+75	650+75	900+75	900+75	1100+75	1100+75	1100+75	1400+75	1400+75	1400+75	1250	1250
Dimensions		D mm	720	720	720	720	720	720	800	800	800	800	800	800	1120	1120
DIFFICIONS		H mm	385	385	385	385	385	385	415	415	415	415	415	415	546	546
	Packing	W mm	895	895	895	895	1140	1140	1345	1345	1345	1640	1640	1640	1466	1466
		D mm	870	870	870	870	870	870	950	950	950	950	950	950	1345	1345

Notes:


- Cooling Operation Conditions
 Indoor Air Inlet Temperature: 27° C DB(80° F DB), 19.0° C WB(66.2° F WB)
- Outdoor Air Inlet Temperature: 35° C DB(95° F DB)
 Heating Operation Conditions
- Indoor Air Inlet Temperature: 20° C DB(68° F DB).

 Outdoor Air Inlet Temperature: 7° C DB(45° F DB), 6° C WB(43° F WB)

 Piping Length: 7.5 Meters Piping Lift: 0 Meter
- The sound pressure level is based on following conditions.
 Sound the unit; With 2.0m discharge duct and 1.0m return duct
 The above data were measured in an anechoic chamber so that reflected sound should be
- taken into consideration in the field.

 3. *1: The size of AVD-76* series gas pipe is Φ22.2mm when leaving the factory, and the diameter can be changed to 19.05mm after welding the adapter pipe.

52 ______ 53 ____

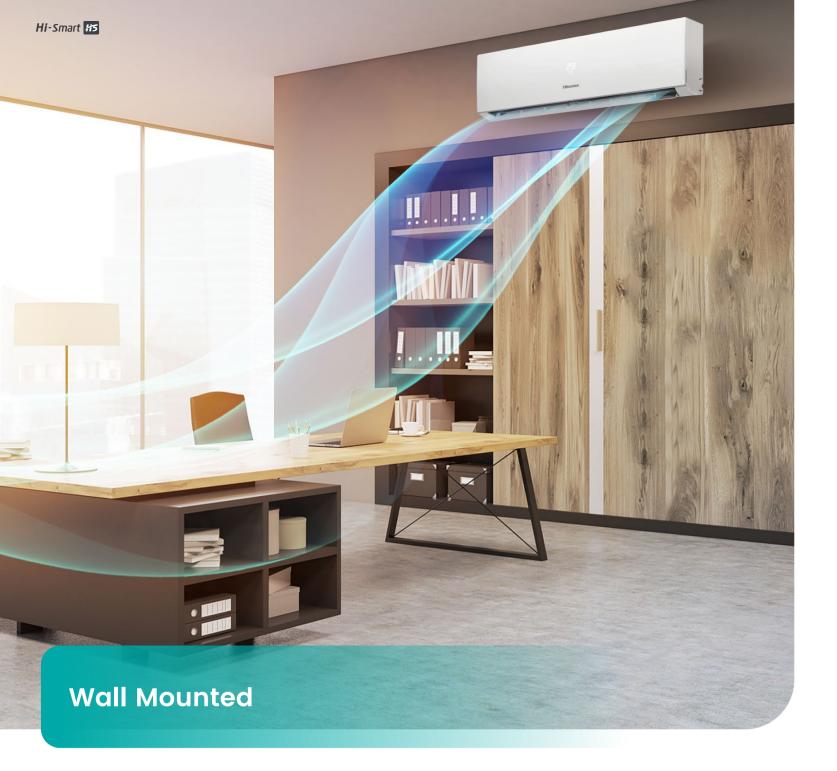







6 Fan Speed



Comfort Cooling Mode



AirPure



Self-cleaning Function



Setback Function



Easy Installation



6 indoor fan sp eeds are available to meet the needs of different indoor conditions.



1 Fan Speed 2 Fan Speed 3 Fan Speed 4 Fan Speed 5 Fan Speed 6 Fan Speed



Gas and Liquid pipes can be connected when the air conditioner is hung on the wall with unique easy instal lation structure, which is convenient and efficiency, improving the installation efficiency up to 35%.

Note:This feature is available for DJ panel wall-mounted unit.





AirPure

AirPure kit is embedded in the unit, which can purify the indoor air, including anti-bacteria and anti-virus, formaldehyde removal, anti-mold, odor removal, PM2.5 purification and anti-allergen. When activate the "Health" icon in the controller, the AirPure will start to work, supplying us clean and health indoor environment.



Note: The DJ panel wall-mounted unit is equipped with a built-in air purification kit.



High-efficiency DC Fan Motor

Equipped with a DC fan motor, the unit significantly reduces the power consumption by 60% compared to conventional AC products, ensuring low–cost operation.




55 -





Featured with self-cleaning technology, the evaporator can be self-cleaned automatically just with the tap of a button in the controller, which is very convenient and saves the cost of manual cleaning, while ensuing a clean environment.

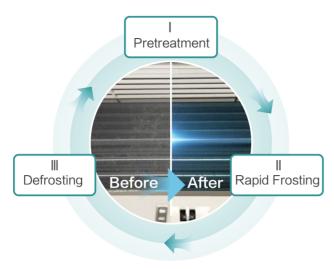

3 processes for deep cleaning



Main-sub Control

Thanks to the main—sub configuration, the sub units can automatically align with the main unit's mode setting, temperature setting, or both, once the main unit is set.





Main	Sub	Sub	
Cooling	Heating	Cooling	
✓	×	✓	



Setback Function

The setback function, designed for when you leave home, includes anti-freezing to maintain indoor temperatures above 8°C and anti-mold through intermittent dehumidification.





Model			AVS-05 HJDDJ	AVS-07 HJDDJ	AVS-09 HJDDJ	AVS-12 HJDDJ	AVS-15 HJDDJ	AVS-19 HJDDJ	AVS-24 HJDDJ	AVS-28 HJDDJ
Power Supply	,					AC 1Φ, 220V~2	240V/50Hz/60Hz			
	Cooling	kW	1.7	2.2	2.8	3.6	4.5	5.6	7.1	8.4
0	Cooling	Btu/h	5,800	7,500	9,600	12,300	15,400	19,100	24,200	28,700
Capacity	Heating	kW	2.0	2.5	3.3	4.0	5.0	6.3	8.0	8.4
	пеашу	Btu/h	6,500	8,500	11,300	13,700	17,100	21,500	27,300	28,700
Danielania	Cooling	W	20	20	20	30	20	30	50	80
Power Input	Heating	W	20	20	20	30	30	30	70	80
Sound Pressu	ire	dB(A)	33/32/32/ 30/30/28	36/35/33/ 32/30/28	36/35/33/ 32/30/28	38/35/33/ 32/30/28	38/37/36/ 32/31/29	40/38/36/ 35/33/31	45/42/41/ 38/35/31	50/48/45/ 41/36/33
Airflow Rate		m³/min	8.7/8.3/8.2/ 7.5/7.2/7.0	9.8/9.2/8.7/ 8.2/7.5/7.0	9.8/9.2/8.7/ 8.2/7.5/7.0	10.3/9.2/8.7/ 8.2/7.5/7.0	11.5/11.0/10.3/ 9.0/8.7/8.0	16.2/15.0/14.2/ 13.3/12.2/11.5	20.0/18.0/17.0/	23.3/22.0/20.0/
Panel Colour		-				W	nite			
	Connection T	уре -	Flare-nut Connection(with Flare Nuts)							
	Liquid	mm	Φ6.35	Φ6.35	Ф6.35	Ф6.35	Φ6.35	Ф9.53	Ф9.53	Φ9.53
Dining	Liquiu	inch	(1/4)	(1/4)	(1/4)	(1/4)	(1/4)	(3/8)	(3/8)	(3/8)
Piping		mm	Φ9.53	Ф9.53	Ф9.53	Φ9.53	Ф12.7	Ф 15.88	Ф 15.88	Φ15.88
	Gas	inch	(3/8)	(3/8)	(3/8)	(3/8)	(1/2)	(5/8)	(5/8)	(5/8)
	Condensate Di	rain -				0.0). 22			
Weight	Net Weight	kg	9.5	9.5	9.5	9.5	13.0	14.4	14.4	14.4
weight	Gross Weigh	t kg	13.4	13.4	13.4	13.4	17.8	19.4	19.4	19.4
		H mm	270	270	270	270	315	315	315	315
	External Dimension	W mm	815	815	815	815	915	1085	1085	1085
Demensions		D mm	203	203	203	203	230	230	230	230
2 0111011010110		H mm	375	375	375	375	430	430	430	430
	Packaging Dimension	W mm	920	920	920	920	1013	1178	1178	1178
		D mm	310	310	310	310	328	328	328	328

NOTES:

- The rated capacity is based on the following conditions;
 Cooling conditions: indoor air inlet temperature: 27° C DB, 19° C WB, outdoor air inlet temperature: 35° C DB, pipe length: 7.5m, pipe height diference: 0m.
 Heating conditions: indoor air inlet temperature: 20° C DB, outdoor air inlet temperature: 7° C DB, 6° C WB, pipe length: 7.5m, pipe height diference: 0m.
- The above noise values are measured in an anechoic chamber so that reflected sound should be taken into consideration during actual operation.
- The above noise values are measured under the fan mode operation, and measured at a point 1m in front of the unit and 0.8m below the unit.





Model			AVS-05 HJDTD	AVS-07 HJDTD	AVS-09 HJDTD	AVS-12 HJDTD	AVS-15 HJDTD	AVS-19 HJDTD	AVS-24 HJDTD	AVS-28 HJDTD
Power Supply						AC 1Φ, 220V~2	240V/50Hz/60Hz			
	Cooling	kW	1.7	2.2	2.8	3.6	4.5	5.6	7.1	8.4
0	Cooling	Btu/h	5,800	7,500	9,600	12,300	15,400	19,100	24,200	28,700
Capacity	Heating	kW	2.0	2.5	3.3	4.0	5.0	6.3	8.0	8.4
	пеашу	Btu/h	6,500	8,500	11,300	13,700	17,100	21,500	27,300	28,700
Danier land	Cooling	W	20	20	20	30	20	30	50	80
Power Input	Heating	W	20	20	20	30	30	30	70	80
Sound Pressul	re	dB(A)	33/32/32/ 30/30/28	36/35/33/ 32/30/28	36/35/33/ 32/30/28	38/35/33/ 32/30/28	38/37/36/ 32/31/29	40/38/36/ 35/33/31	45/42/41/ 38/35/31	50/48/45/ 41/36/33
Airflow Rate		m³/min	8.7/8.3/8.2/ 7.5/7.2/7.0	9.8/9.2/8.7/ 8.2/7.5/7.0	9.8/9.2/8.7/ 8.2/7.5/7.0	10.3/9.2/8.7/ 8.2/7.5/7.0	11.5/11.0/10.3/ 9.0/8.7/8.0	16.2/15.0/14.2/ 13.3/12.2/11.5	20.0/18.0/17.0/	23.3/22.0/20.0/
Panel Colour		-		White						
	Connection 7	Гуре -	Flare-nut Connection(with Flare Nuts)							
	Liquid	mm	Ф6.35	Φ6.35	Φ6.35	Φ6.35	Ф6.35	Φ9.53	Φ9.53	Φ9.53
Dining	Liquid	inch	(1/4)	(1/4)	(1/4)	(1/4)	(1/4)	(3/8)	(3/8)	(3/8)
Piping		mm	Ф9.53	Φ9.53	Φ9.53	Φ9.53	Ф12.7	Ф 15.88	Ф15.88	Φ15.88
	Gas	inch	(3/8)	(3/8)	(3/8)	(3/8)	(1/2)	(5/8)	(5/8)	(5/8)
	Condensate D	orain –				0.0	0. 22			
\A/-:	Net Weight	kg	9.5	9.5	9.5	9.5	13.0	14.4	14.4	14.4
Weight	Gross Weigh	it kg	13.4	13.4	13.4	13.4	17.8	19.4	19.4	19.4
		H mm	270	270	270	270	315	315	315	315
	External Dimension	W mm	845	845	845	845	960	1120	1120	1120
Demensions	PILICIPION	D mm	203	203	203	203	230	230	230	230
		H mm	375	375	375	375	430	430	430	430
	Packaging Dimension	W mm	943	943	943	943	1058	1223	1223	1223
		D mm	310	310	310	310	328	328	328	328

- 1. The rated capacity is based on the following conditions: Cooling conditions: indoor air inlet temperature: 27°C DB, 19°C WB, outdoor air inlet temperature: 35°C DB, pipe length: 7.5m, pipe height diference: 0m. Heating conditions: indoor air inlet temperature: 20°C DB, outdoor air inlet temperature: 7°C DB, $6^{\circ}\!\text{C WB}$, pipe length: 7.5m, pipe height diference: 0m.
- 2. The above noise values are measured in an anechoic chamber so that reflected sound should be taken into consideration during actual operation. The above noise values are measured under the fan mode operation, and measured at a point 1m in front of the unit and 0.8m below the unit.

Accessories

Refrigerant Detector

Refrigerant Sensor

Shut-off Box

re	Model	Applicable Models	Picture
	HESE-2V15	R32 refrigerant systems	

Model	Applicable Models	Picture
PT-ERD01	R32 refrigerant systems	

HOPT-ERD02

Motion Sensor

Applicable Models

Model	Applicable Models	Picture
HPS-MACN	Mini 4-Way Cassette	
HCM-01E	4-Way Cassette	•

Hi-Motion

Model	Applicable Models	Picture
HCM-S01E	All types of indoor units	

Fresh Air Duct Adapter

Model	Applicable Models	Picture
HFL-56CSA	4-Way Cassette and Mini 4-Way Cassette	O

Humidity Sensor

Model	Applicable Models	Picture
HCHR-S01E	4-Way Cassette Mini 4-Way Cassette Ceiling Ducted	

Filter

Filter model	Dimensions (L × W × H) mm	Applicable Models	Picture
HF-56MQE	343×343.5×15.0	Mini 4-Way Cassette	
HF-160MQE	527×513.0×17.0	4-Way Cassette	
HF-280L-FE	Filter: 1100 × 432.5 × 20 Frame: 1245 × 463	AVD-76/96HJDH	

Filter box model	Dimensions (L×W×H) mm	Applicable Models	Applicable Filter	Picture	
HFB-96LFGDE	1339×384×462	AVD-76/96HJDH	High-efficiency filter: HF-96HFGDE Coarse filter: HF-96LFGDE		

AirPure Kit

Model	Power Supply	Applicable Models	Picture
HJK-ELZA	AC 1Ф, 220V~240V 50/60Hz	4-Way Cassette, Mini 4-Way Cassette	
HJK-ELZB	AC 1Ф, 220V~240V 50/60Hz	Ceiling Ducted	



Drain Pump


Model	Applicable Models	Power Supply	Picture			
HPS-F133E	AVD-07~24HJDH	220-240V/50/60Hz				
HPS-F363E	AVD-24HJDH1 / AVD-30~54HJDH	220-240V/30/60HZ			A C	
HPS-F8103E	AVD-76/96HJDH	220-240V/50/60Hz	HPS-F133/363E	HPS-F8103E	HPS-151#E	
HPS-151#E	All types of indoor units except wall mounted type					

NFC

Model	Applicable Models	Picture
HNFC-EA1	AVW-76~308HKDHE2	

Piping System

Manifold Pipe (For outdoor unit)

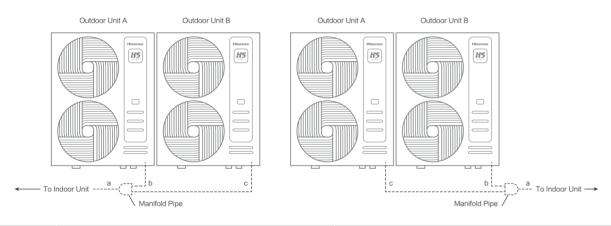

Outdoor Unit	AVW-170~232HKDHE2	AVW-250~308HKDHE2
Manifold Pipe	HFQ-M22F	HFQ-M32F


Branch Pipe (For indoor unit)

First Branch Pipe

Outdoor Unit HP	8 to 10	12 to 16	18 to 24	26 to 32	
Branch Pipe	HFQ-102F	HFQ-162F	HFQ-242F	HFQ-302F	


First Branch Pipe~Last Branch Pipe

Total Indoor Unit HP	Q≤6	6 <q≤9< th=""><th>9<q≤12< th=""><th>12<q≤16< th=""><th>16<q≤18< th=""><th>18<q≤26< th=""><th>26<q≤34< th=""><th>34<q≤48< th=""></q≤48<></th></q≤34<></th></q≤26<></th></q≤18<></th></q≤16<></th></q≤12<></th></q≤9<>	9 <q≤12< th=""><th>12<q≤16< th=""><th>16<q≤18< th=""><th>18<q≤26< th=""><th>26<q≤34< th=""><th>34<q≤48< th=""></q≤48<></th></q≤34<></th></q≤26<></th></q≤18<></th></q≤16<></th></q≤12<>	12 <q≤16< th=""><th>16<q≤18< th=""><th>18<q≤26< th=""><th>26<q≤34< th=""><th>34<q≤48< th=""></q≤48<></th></q≤34<></th></q≤26<></th></q≤18<></th></q≤16<>	16 <q≤18< th=""><th>18<q≤26< th=""><th>26<q≤34< th=""><th>34<q≤48< th=""></q≤48<></th></q≤34<></th></q≤26<></th></q≤18<>	18 <q≤26< th=""><th>26<q≤34< th=""><th>34<q≤48< th=""></q≤48<></th></q≤34<></th></q≤26<>	26 <q≤34< th=""><th>34<q≤48< th=""></q≤48<></th></q≤34<>	34 <q≤48< th=""></q≤48<>
Gas (mm)	HFQ-102F	HFQ-102F	HFQ-102F	HFQ-162F	HFQ-162F	HFQ-242F	HFQ-302F	HFQ-302F
Liquid (mm)	15.88	19.05	22.2	25.4	28.6	28.6	31.75	38.1
Branch Pipe	9.53	9.53	9.53	12.7	12.7	15.88	19.05	19.05

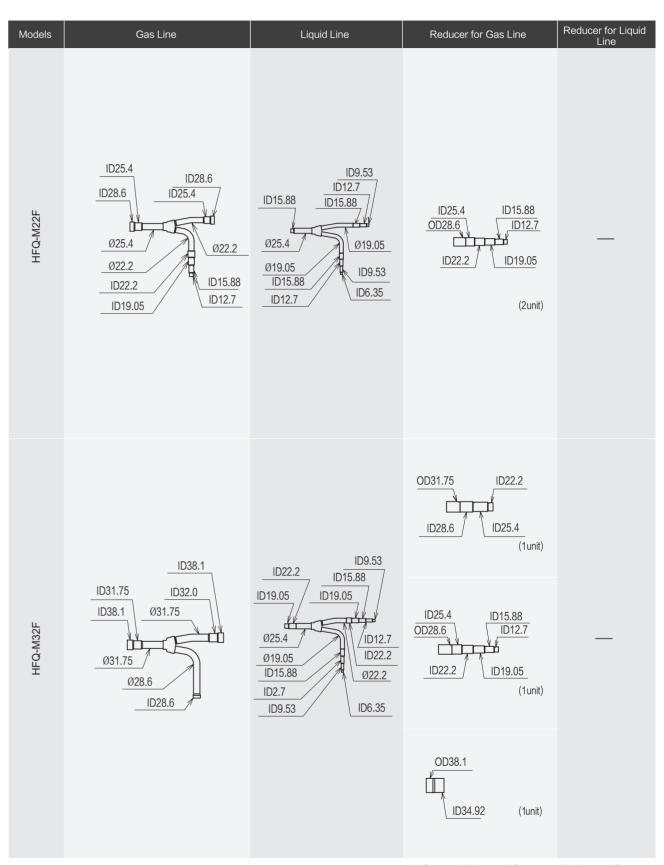

Unit: mm, ID: Inner Diameter, OD: Outer Diameter



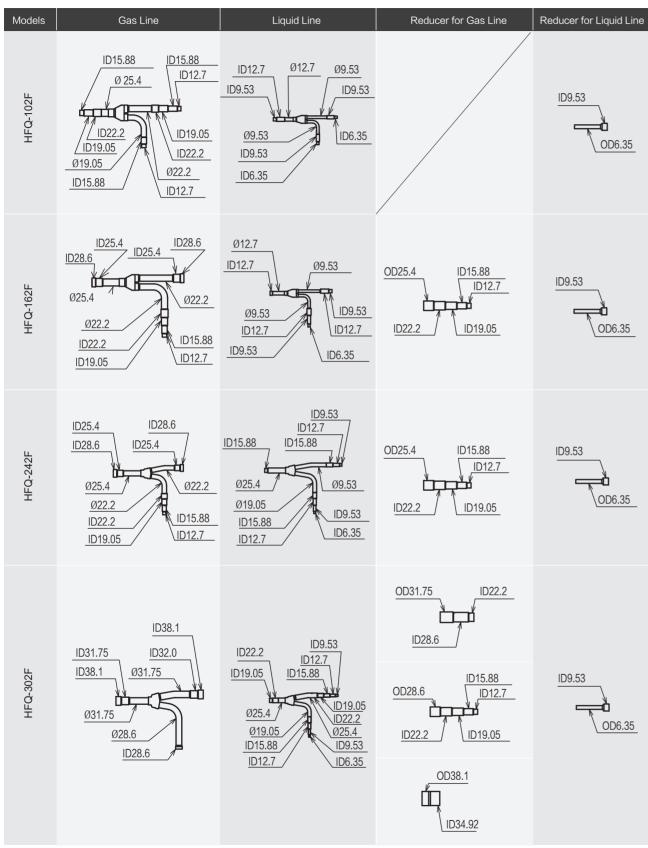

Unit: mm, ID: Inner Diameter, OD: Outer Diameter