

Hisense

Hisense HVAC



Qingdao Hisense HVAC Equipment Co., Ltd.
Hisense International Center, Qingdao, China

<http://www.hisensehvac.com> hhexport@hisense.com [Hisense HVAC](#) [Hisense HVAC](#) [Hisense HVAC](#)

CE CB    HCAC-VRF-GB202506

★ Design and specifications are subject to change without notice. Pictures and diagrams are for reference only and are subject to change without notice.
All rights reserved by Qingdao Hisense HVAC Equipment Co., Ltd.

Reimagine your solution

Hisense HVAC

Hisense

海信国际中心

Hisense SINCE 1969

Hisense is a well-known large-scale electronic information industrial group. With strong emphasis on technology and innovation, its efficient technological innovation system firmly grounds Hisense at the forefront of its peers. At present, Hisense brand family has expanded to include multiple famous brand Hisense, Toshiba, Gorenje and ASKO.

SINCE 1969

BUSINESS LAYOUT

Multimedia

TV and Display Devices
Internet TV Operation
Mobile Communication Devices
Optical Communication
Devices
Chip

Household Appliances


Refrigerator
Freezer
Air-conditioner
Washing Machine
Kitchen Appliance

IT Smart Systems

Smart City
Smart Community
Smart Transportation
Smart Business
Medical Electronic Devices
Smart Home System and Service



Real Estate & Modern Services

Real Estate
High-end Plaza Chains
Mould Design and Manufacturing
Finance
Trade

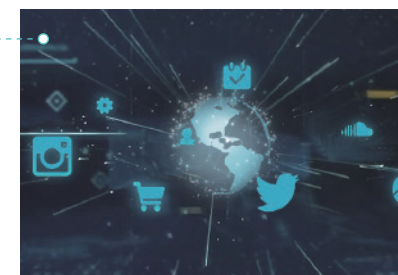

GLOBAL HISENSE SINCE 1969

Hisense has started a long-term sports marketing strategy to increase brand awareness worldwide. After the successful sponsorship of **UEFA EURO 2016 & 2020 & 2024** and **FIFA WORLD CUP 2018 & 2022**, Hisense has made clear its focus on football. Hisense also is the official partner of **FIFA Club World Cup 2025**.

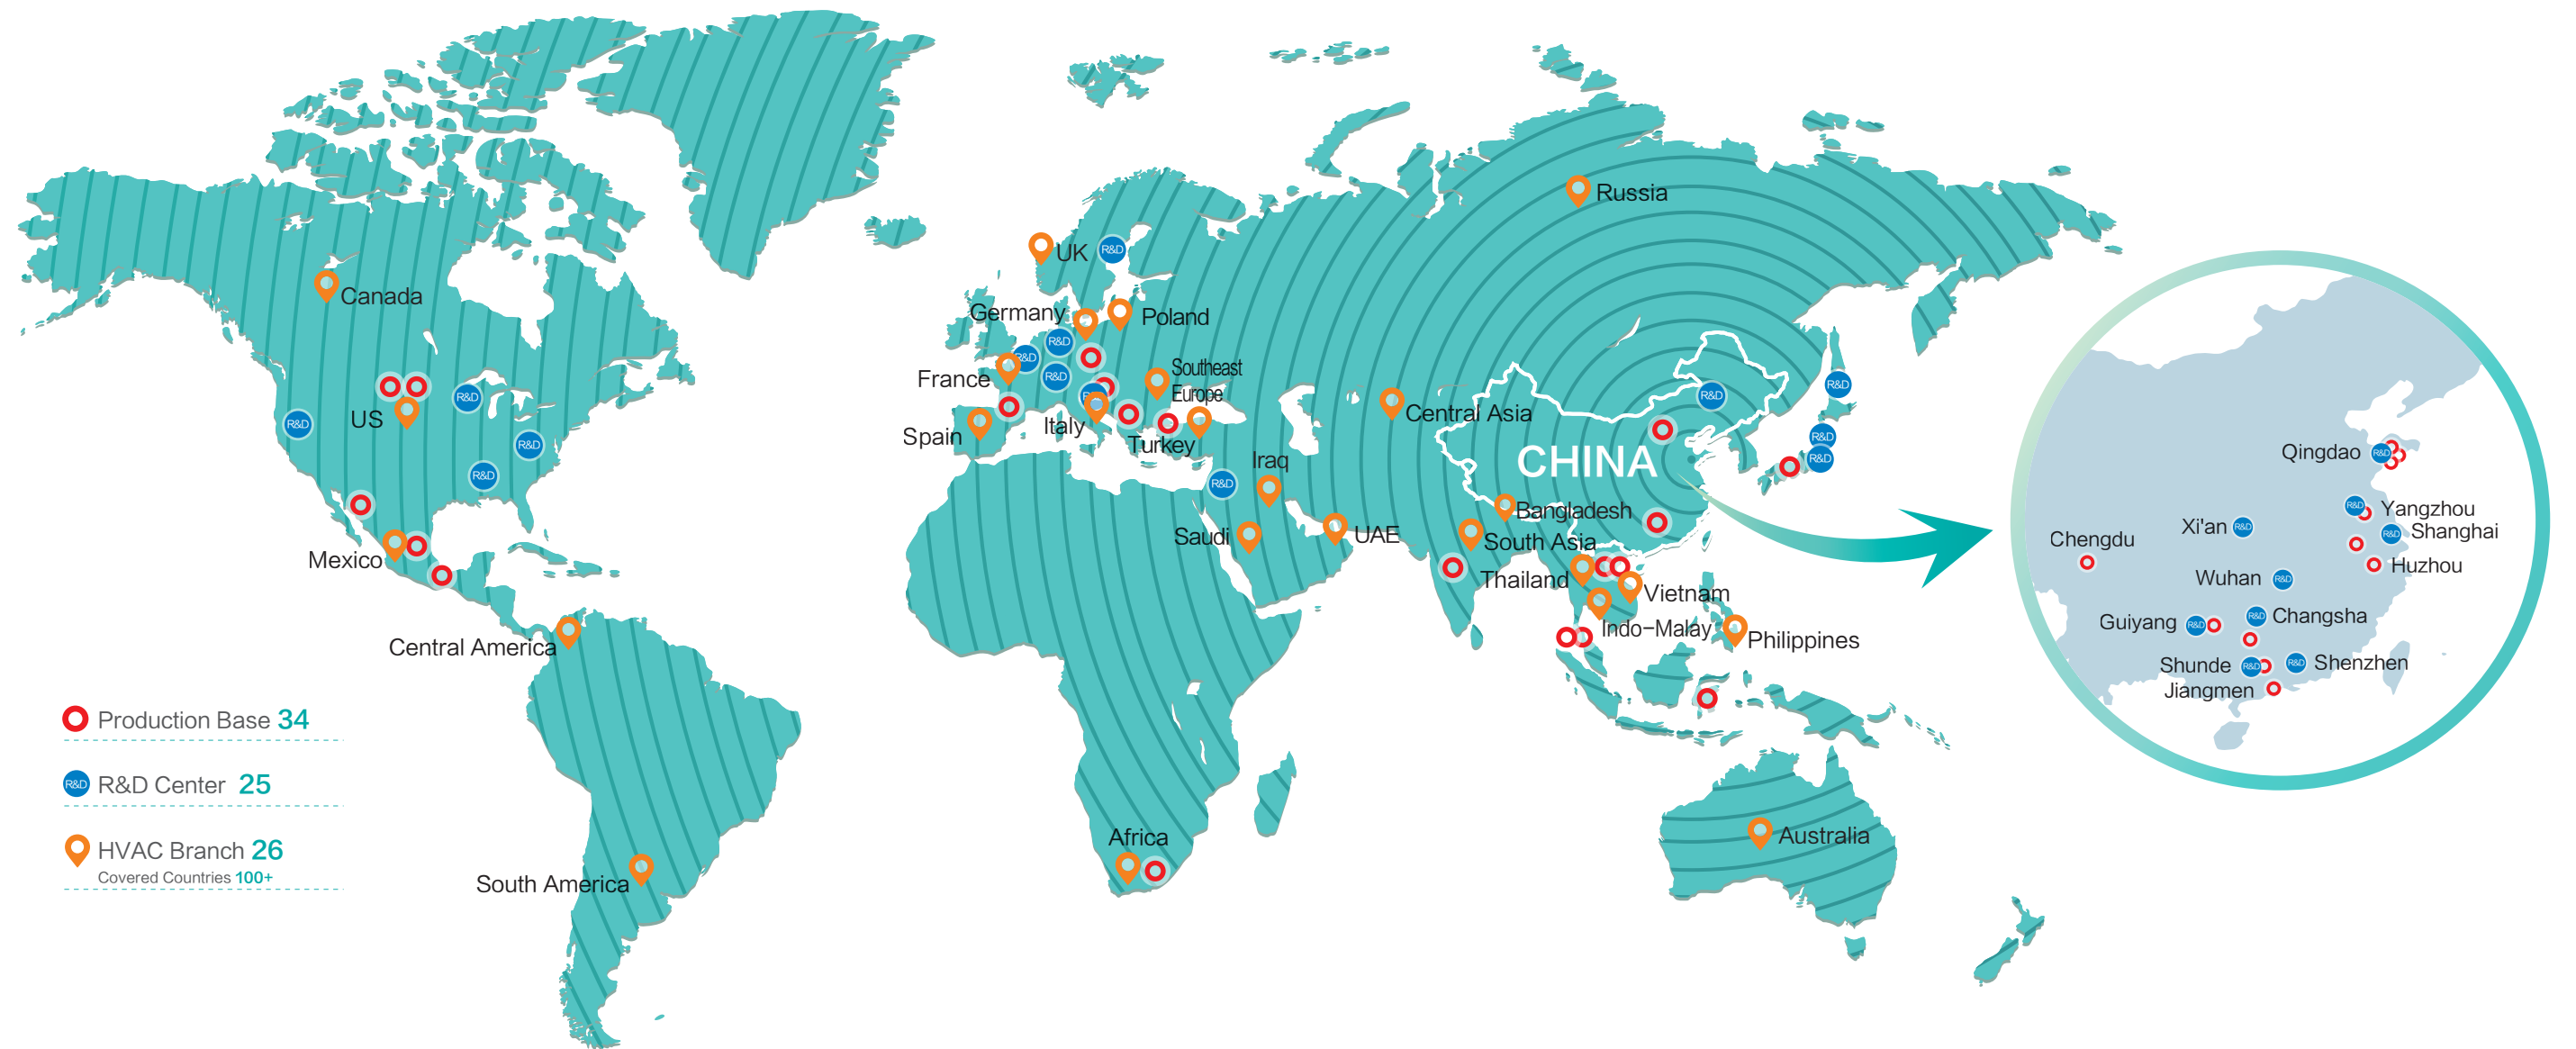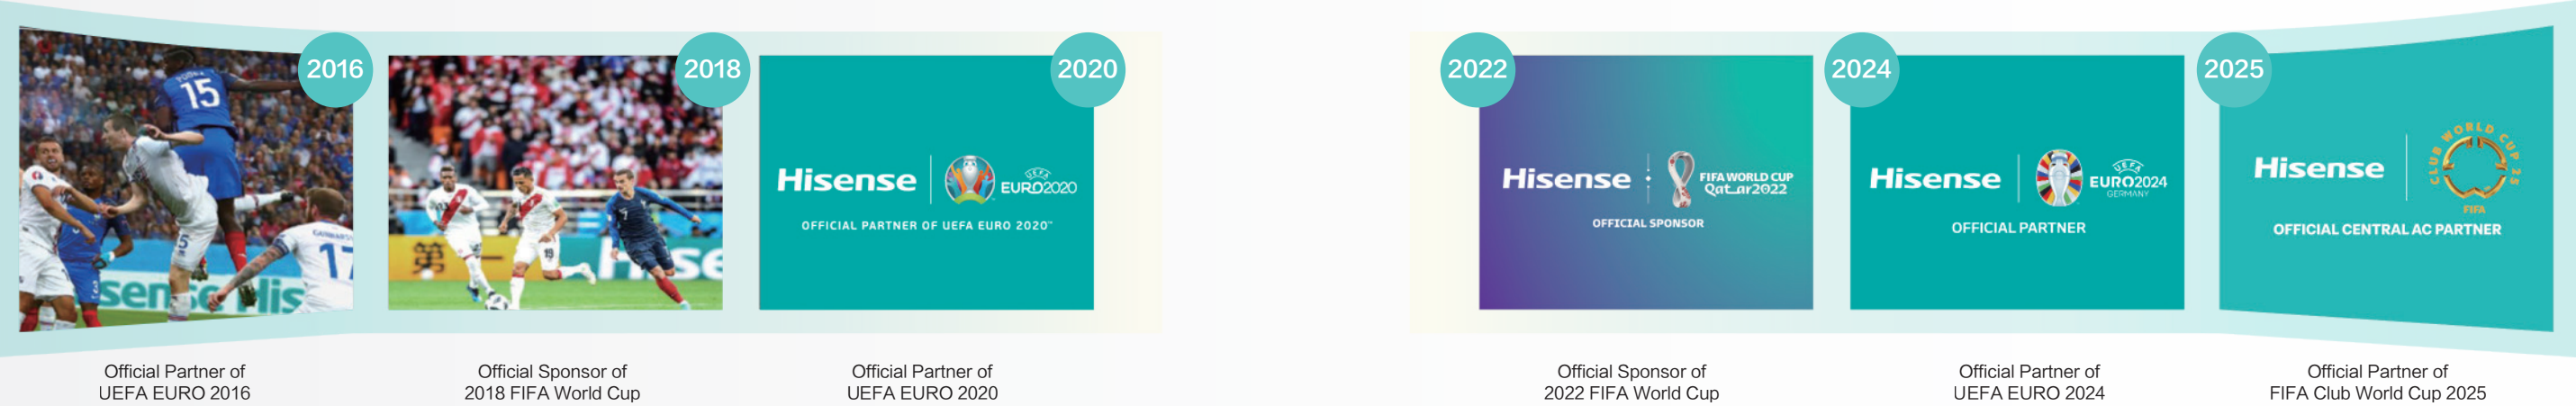

Hisense HVAC MANUFACTURING BASE

Qingdao Hisense HVAC Equipment Co. Ltd. is a leading manufacturer of heating, ventilation, air conditioning and other HVAC equipments, integrated with the product development, manufacturing, sales and after-sales service as a whole.

Hisense HVAC always regards product technology research and development as the most important value. With strong technological innovation capabilities, Hisense HVAC has participated in the formulation and revision of 112 national standards, industry standards and association standards, and boasts 2020 authorized patents in the field of CAC and heat pump products. With the great support of all shareholders and customers, Hisense HVAC is expected to become the leading brand in the industry.

Note: The above data is as of December 2024.



266,000^{m²}
Manufacturing Area



40+
Production Line



11,000,000^{units/year}
Production Capacity



16,700^{m²/70+}
Laboratory

The Guiding Light of Manufacturing
The World's First
VRF Lighthouse Factory



HISENSE HVAC PROFESSIONAL ENGINEERING TOOLS & SUPPORT



Beyond Your Expectation

Hisense HVAC is committed to providing a comprehensive suite of air conditioning solutions. Our services span every stage of the customer journey — from product development, pre-sales support, and quotation & purchase, to installation & commissioning, use & experience, and after-sales service. At Hisense HVAC, we consistently deliver enhanced support to ensure our customers receive unparalleled assistance.

Introducing our iCare vision, Hisense HVAC is taking a step further to elevate our technical support and after-sales service, reaffirming our commitment to customer satisfaction.

Informatization Unified HVAC Application Platform

Hisense has built the technical platform matrix which including the product selection software, CAD Hi-Design software, BIM, service platforms GCSS, GSD, GKP and so on.



Customer Oriented

Hisense HVAC boasts over 50 technical and service teams strategically positioned worldwide to offer prompt local support. With more than 5 regional spare parts centers and 20+ national spare parts warehouses, we ensure high-quality and swift spare part supply. Furthermore, R&D centers in Europe and America are currently under construction.



Reliable Service Anytime and Anywhere be with You

We've established a comprehensive all-media after-sales service system, ensuring reliable assistance anytime and anywhere.

Ability Focus on Full Cycle Training Support

The Hisense HVAC Academy was founded to offer a range of training courses for our staff and partners, with the goal of consistently enhancing the HVAC expertise of engineers, installers, and service agents.



5000m² training center in HQ
10+ training center globally
Skilled training team in HQ



5+ practice operation room
Real machine teaching
Live training online

Excellence Pursuit Enhancing User Experience Continuously

The technical and service team not only serves as the business's service provider but also champions excellent products. Hisense is actively promoting the application of Cloud AI and NFC in HVAC.



CONTENTS



25 COMFORT



41 OUTDOOR UNITS

Hi-FLEXi S5 Series	-43
Hi-FLEXi S Series Heat Recovery	-61
Hi-FLEXi S mavo+ Series	-77
Hi-FLEXi X3 Series	-90
Hi-FLEXi W Series	-102
Hi-Smart H5 Series	-113
Hi-Smart A Series	-121
Hi-Smart L+ C+ Series	-127
Hi-Smart H Series	-133



03 RELIABILITY



179 CONTROL SYSTEMS



197 ACCESSORIES

EFFICIENCY 17



FLEXIBILITY 33



INDOOR UNITS 139



4-Way Cassette / Mini 4-Way Cassette	-143
1-Way Cassette	-147
2-Way Cassette	-149
Console	-151
Ceiling Ducted (AC/DC Low-height)	-154
Ceiling Ducted (High/Low Static Pressure)	-157
Wall Mounted	-163
Floor Standing	-165
Ceiling & Floor	-167
Floor Concealed	-169
All Fresh Air Indoor Unit	-171
Heat Recovery Ventilator	-173
AHU Connection KIT	-177

Hi-FLEXi S5
Series

Hi-FLEXi S
Series Heat Recovery

Hi-FLEXi S mavo+
Series



S5

8~14HP16~20HP22~26HP28~30HP32~42HP



44~80HP82~120HP



S/S mavo+

8~12HP14~18HP20~24HP26~28HP



30~56HP58~84HP



86~112HP



8~12HP14~18HP20~24HP26~28HP



30~56HP58~84HP



86~112HP



Hi-FLEXi X3
Series



8~14HP16~20HP22~40HP



42~60HP



H5


4/5/6HP8/10/12/14/16HP18~32HP



R32R32R32

A

3/3.5HP4/5/6HP6.5/7/8HP



L+C+

4/5/6HP8/10/12HP



H

3/4/5HP4/5/6HP8/10/12HP



Hi-FLEXi W
Series



Hi-Smart H5
Series

Hi-Smart A
Series

Hi-Smart L+ C+
Series

Hi-Smart H
Series



Hisense VRF

RELIABILITY

Refrigerant Circuit

Enhanced Anti-corrosion Solution


System & Operation

Electrical & Electronics

Indoor Unit Reliability


AIR
CONDITIONING
SOLUTION

Refrigerant Circuit

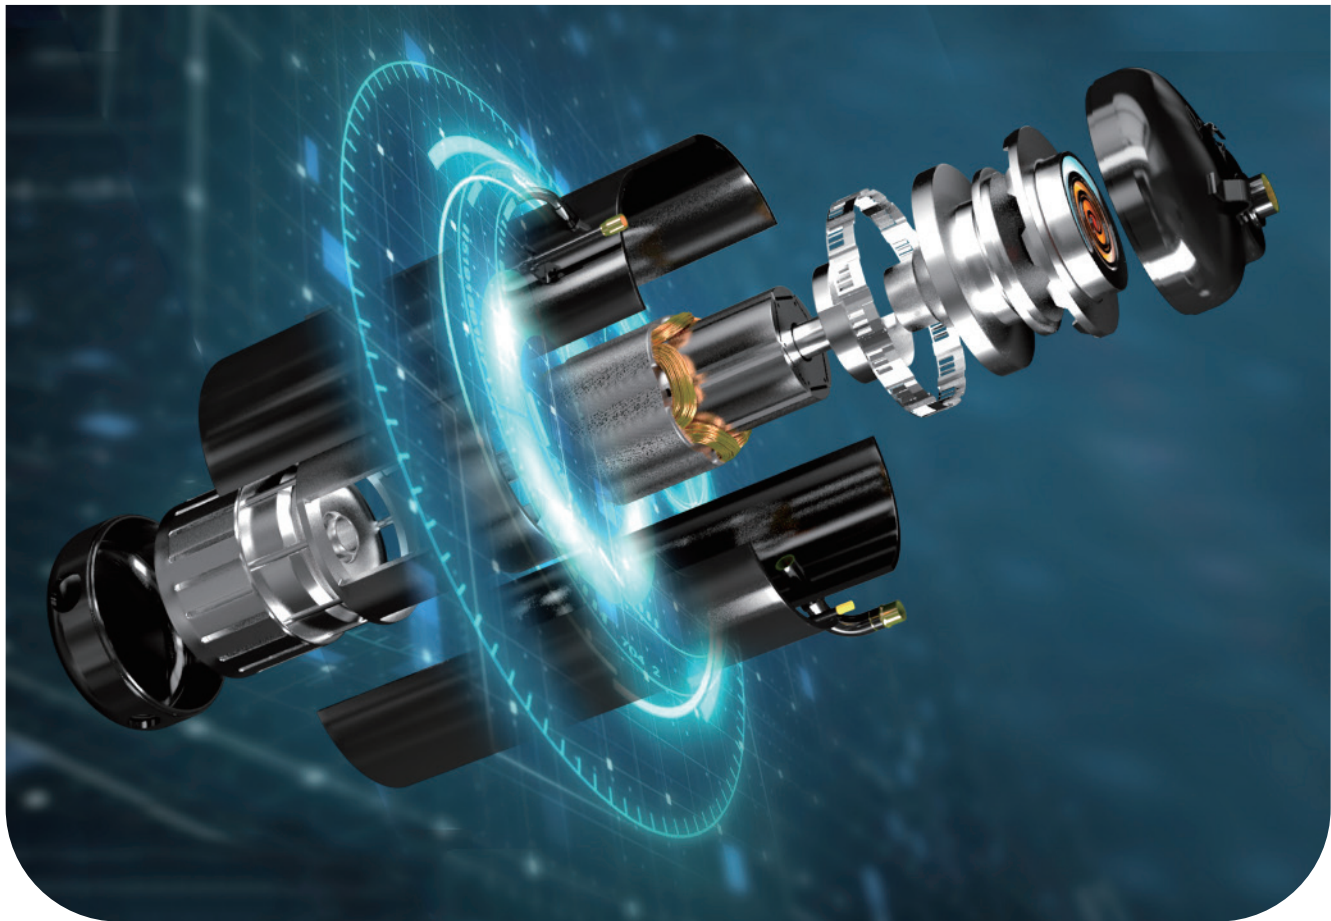

Efficient energy usage


Wasted power is reduced by minimizing leakage and anti-overcompression while compressing refrigerant gas with asymmetric scroll and patented release valves.

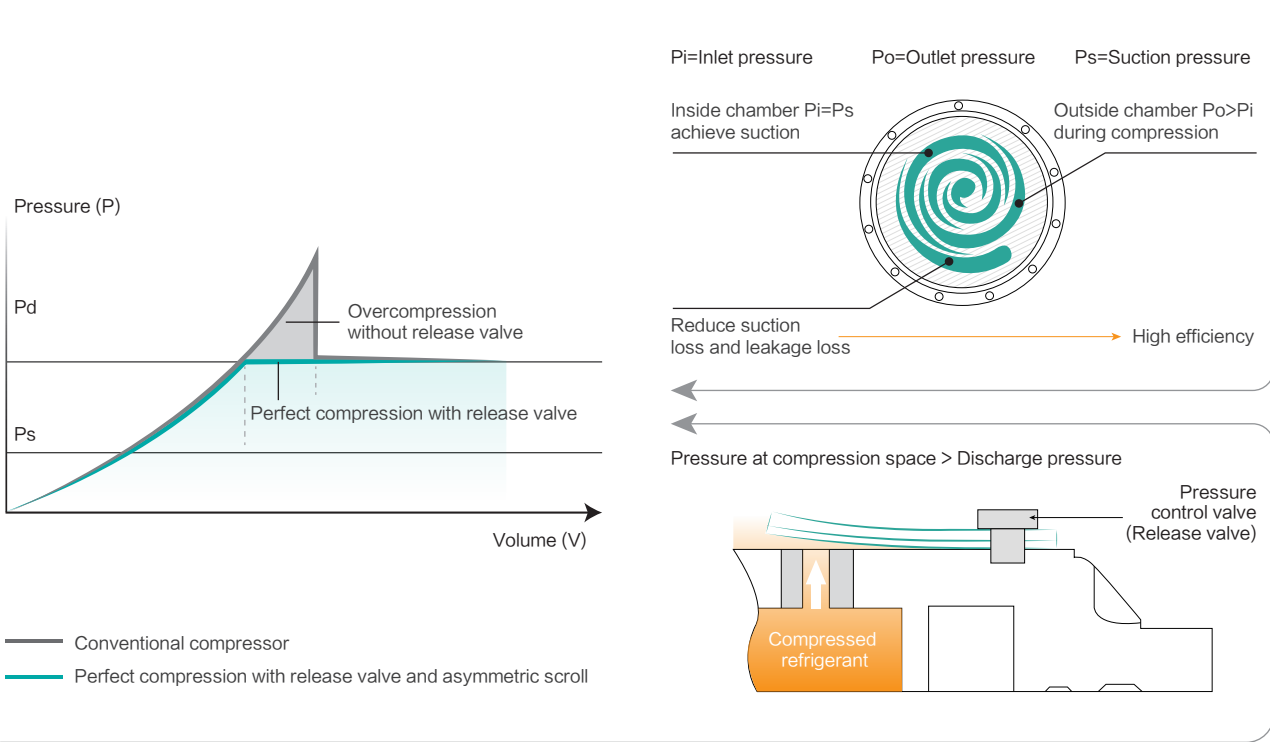


Revolutionary HVAC compressor

Vapour injection technology

New generation scroll compressor is now patented with higher performance capability vapour injection technology, increasing capacity up to 25% compared to conventional scroll compressor with same amount of power consumed.

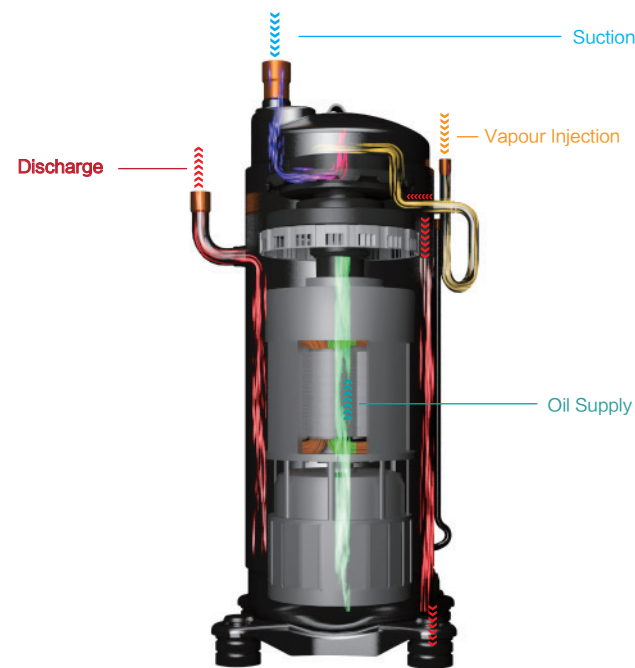

Enhanced oil level retaining capability

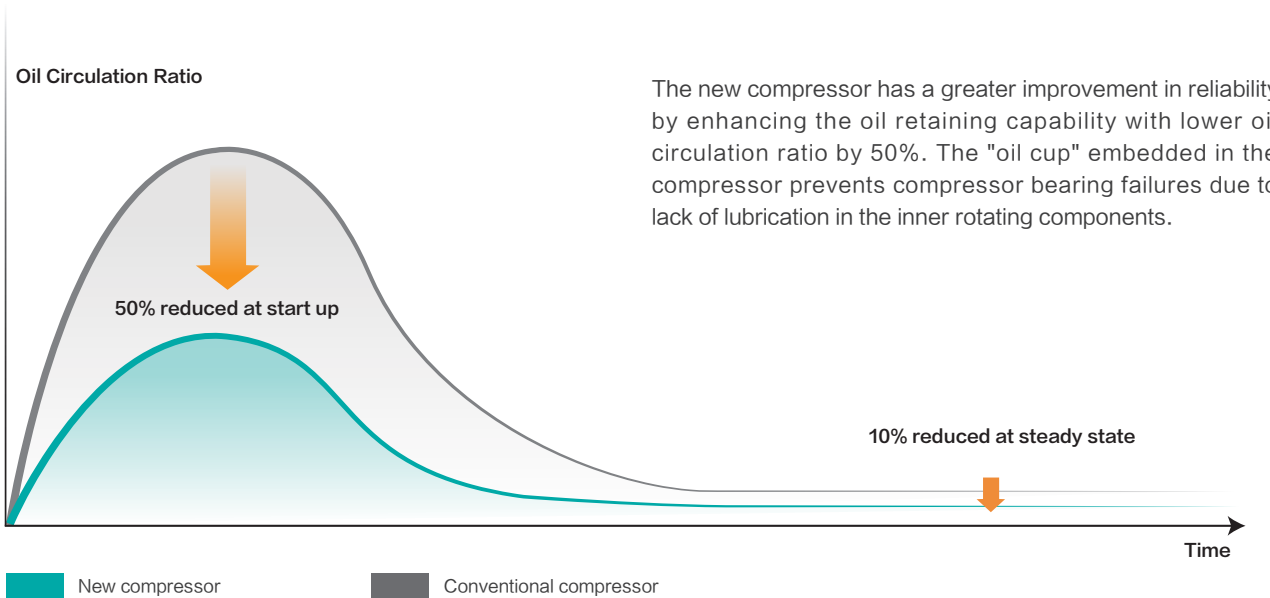


The new compressor has a greater improvement in reliability by enhancing the oil retaining capability with lower oil circulation ratio by 50%. The "oil cup" embedded in the compressor prevents compressor bearing failures due to lack of lubrication in the inner rotating components.




Oil separation and oil return

Oil separation

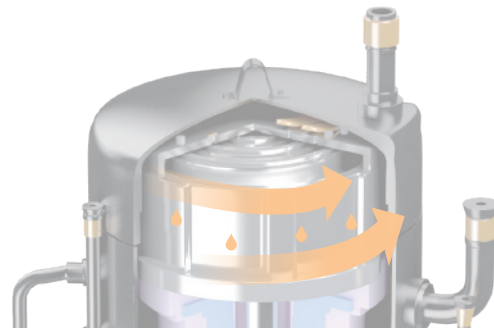

First-stage Oil Separation

First-stage oil separation is realized through efficient oil separation structure inside the high-pressure-chamber compressor. Only a small amount of oil is brought out of the compressor.

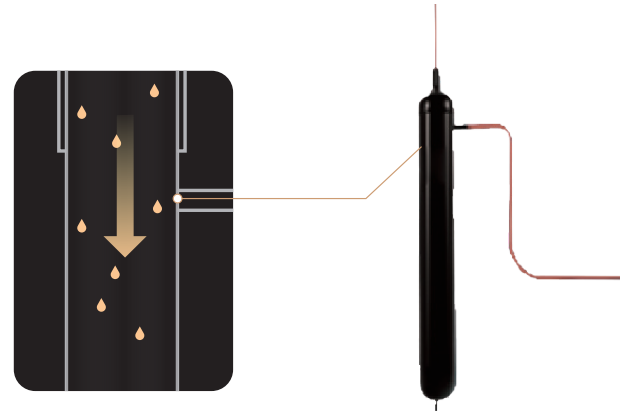

Second-stage Oil Separation


During second-stage oil separation, the small amount of oil discharged from compressor is separated by a large-capacity high-efficiency centrifugal oil separator, with efficiency over 99%.

Oil return

The accumulator adopts pore tube oil return technology with a built-in fine strainer, which not only ensures oil balance between compressors within one module, but also plays an important role in the oil balance between modules.

Besides this, the system implements oil-return function based on compressor frequency and corresponding operation time. The oil-return takes 60 seconds and can return to previous condition when it is finished.

In winter under heating mode, this operation is implemented without switching to cooling mode, which guarantees the heating performance.

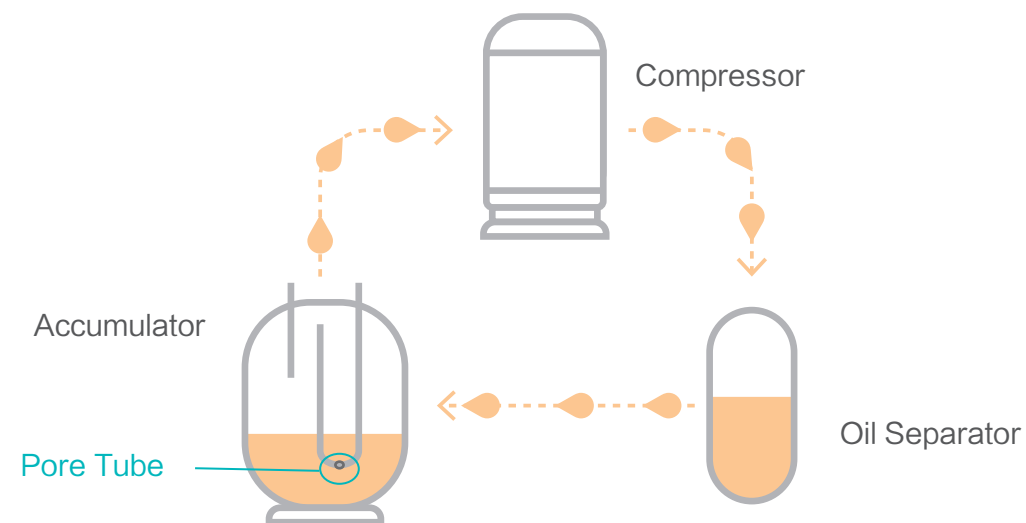

Enhanced Anti-corrosion Solution(optional)

Hisense's complete corrosion-proof is a perfect solution in seaside and chemical factory applications (sulphide contamination occasion), providing ultimate comfort without sacrificing life span and reducing maintenance cost simultaneously.

The components from top to toe are treated with effect treatments, and the systems have acquired UL certification.



- | | | |
|-------------------------|--|-------------------------|
| ① Front Panel | Galvanized steel treated with zirconium & 100 μ m ~ 180 μ m epoxy zinc rich primer + pure polyester paint coating. | |
| ② Heat Exchanger | Dark Gray fin (with epoxy resin and acrylic resin & hydrophilic film); Cooper fin. | |
| ③ Electrical Box | Galvanized steel treated with zirconium & 50 μ m~120 μ m pure polyester. | |
| ④ Fan Motor | Coated with 10 μ m ~ 30 μ m acrylic resin coating Thickness: 10 μ m ~30 μ m. | |
| ⑤ Top Grill | ⑥ Motor Bracket | ⑦ Protection Net |

Note

Please refer to the catalog of Hisense VRF Anti-corrosion Solution for detailed anti-corrosion treatment measures.

System & Operation



Self-diagnosis

Method1: Alarm codes will flash when an error or breakdown occurs, which is helpful for installers and end-users to understand what's going on during test run.

Method2: Besides alarm codes, operating status and parameters such as history temperature, pressure, compressor frequency and etc. are traceable on controllers and the outdoor unit, making service maintenance and troubleshooting much easier.

Method3: The S5 and H5 series support the optional NFC module, allowing service engineers to simply touch their phones to the unit's NFC module to read operational data and diagnose system faults through an app, making service work more convenient and intelligent.



Method 1: PCB button press



Method 2: Through the wired controller



Method 3: NFC(Optional) control on the APP

- Automatically detect whether the power supply is in reverse or out of phase state.
- Automatically detect abnormal communication and wrong wiring connection.
- Automatically identify pipeline length for more optimal operation.
- Automatically confirm the normal operation of components such as compressors, fan motors, EEVs, four-way valves, etc.

Note

NFC module(optional) is needed for Method 3. Not suitable for H5 single-fan units.




Self-protection

Hisense VRF can protect itself with algorithms embedded to make necessary protective decisions and measures by different sensor readings and parameters, including compressor protections, system protections, inverter protections and electric protections.




Smart rotative operation


Operation duties are smartly balanced in higher capacity module combinations to prevent occurrence of individual unit overworked and hence extending the overall operating life of the overall system.

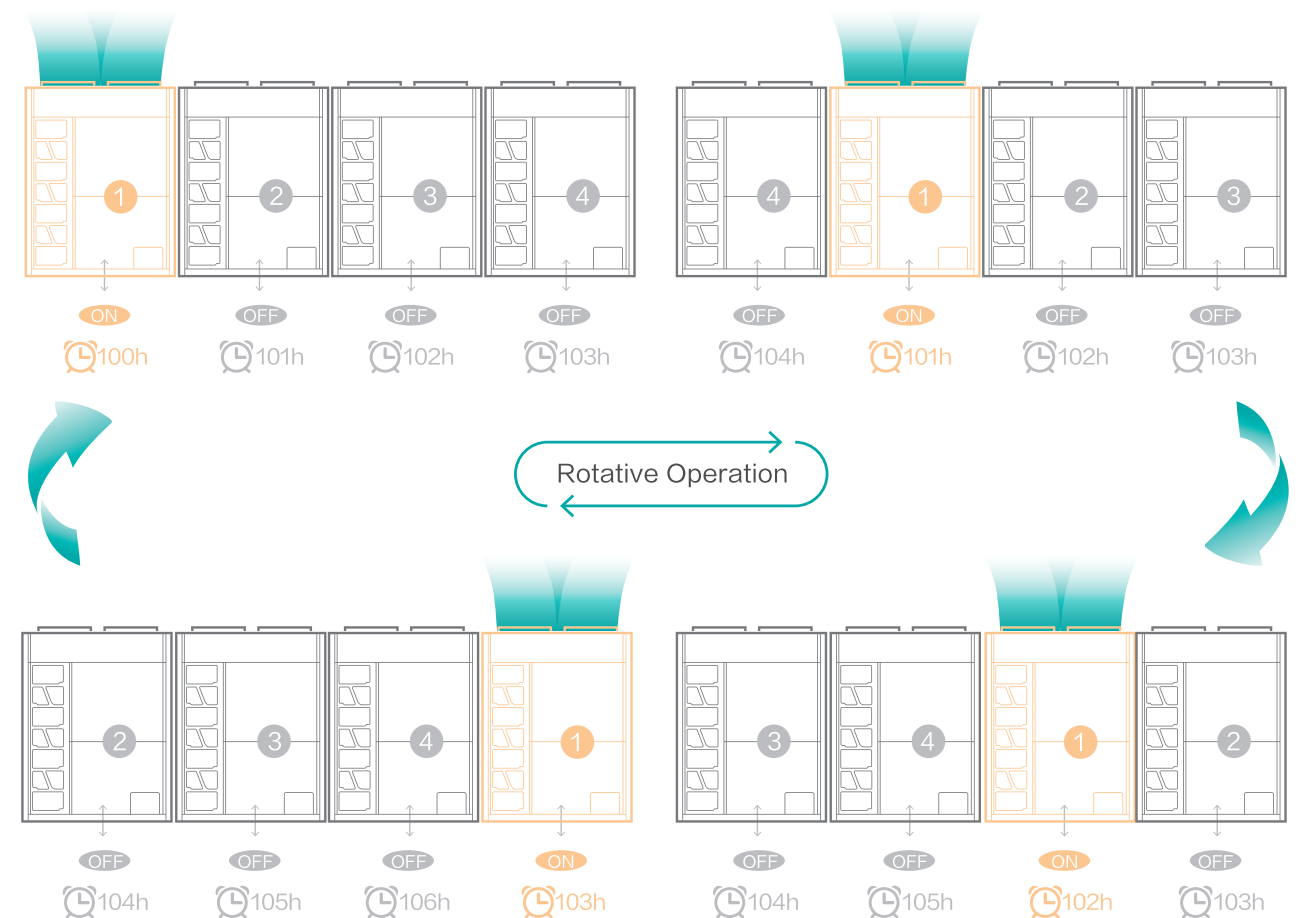


Multiple backup operation



Compressor Backup
If one compressor fails, the other compressor will seamlessly take over for emergency operation without interruption.




Inverter PCB Backup
If one of the inverter PCB fails, the remaining inverters can also continue functioning in an emergency.



Fan Motor Backup
Similarly, if a fan motor fails, the other one can keep working to ensure efficient unit operation.




Sensor Backup
Using digital twin technology, virtual sensors are generated based on the built-in pressure and temperature values of the unit, providing mutual backup for emergency operation.

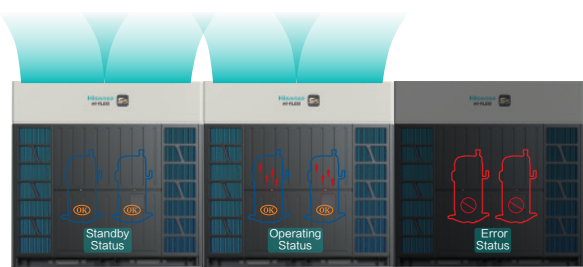

Module Backup
In the case of a module failure within a combination system, the remaining modules are still able to sustain operation in emergency mode.

Snow hood (optional)


The snow hood kit can effectively prevent heavy snow from accumulating on the top of the unit and covering the heat exchanger. Heavy snow accumulating will affect the heat exchange seriously, thus stable operation can be ensured thanks to the snow hood.

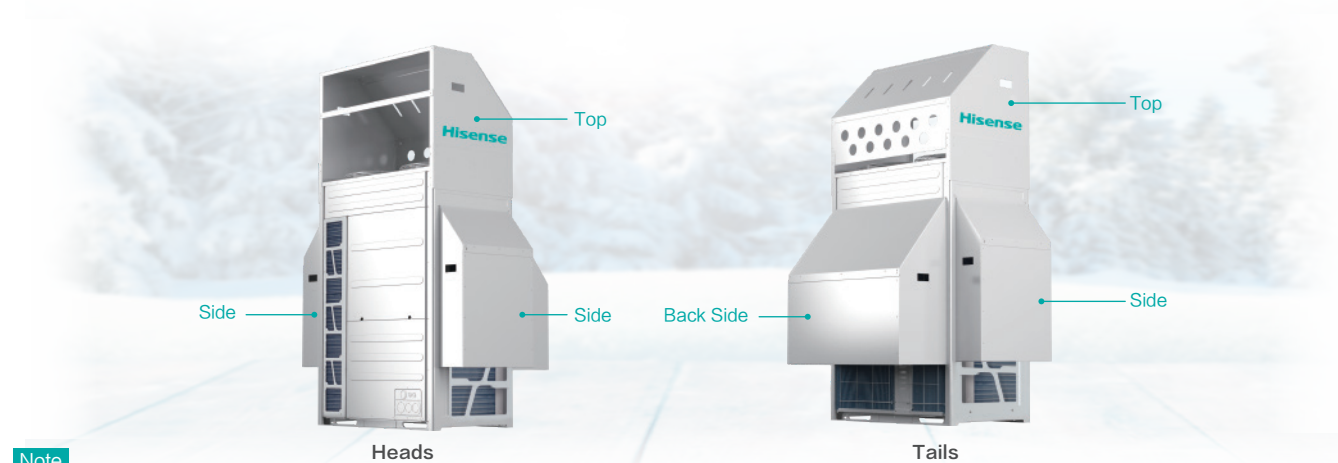

Note
Available for S5 and S series.

Wider operation range


Extended operation range creates wider application potential, in cooling mode the operation range is from -15°C DB to 55°C DB and in heating mode the operation range is from -30°C WB to 30°C WB, which adapts to extreme conditions.

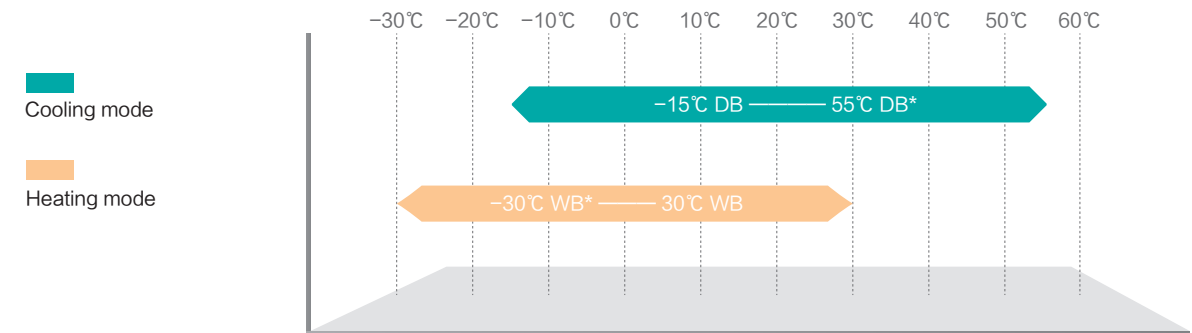

Note
Please refer to the specification table of each series for detailed operation range.


Automatic Restart

Hisense indoor units are capable to restart automatically to the previous state whenever the power supply is shut off suddenly and restores immediately. When there is long power shortage, the default setting is to keep all the indoor units off when the power restores. Also there are two other settings for users' choice, recovering to the state before power failure or restarting all the indoor units.

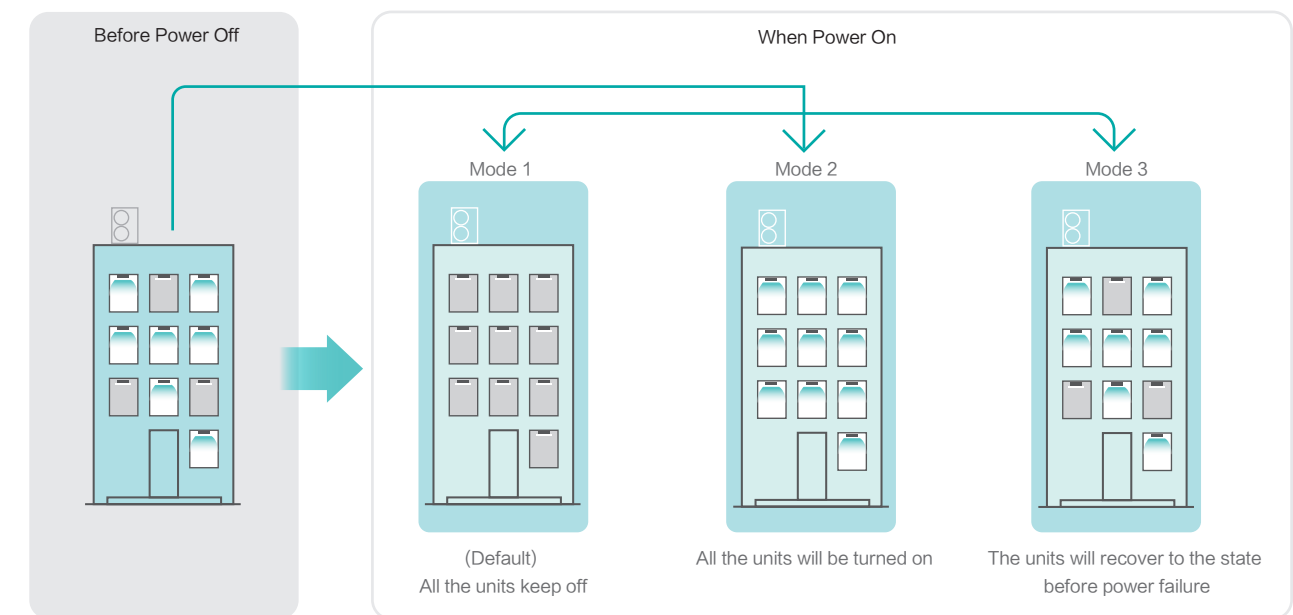


* DIP setting is necessary for mode 2 and mode 3.

Electrical & Electronics

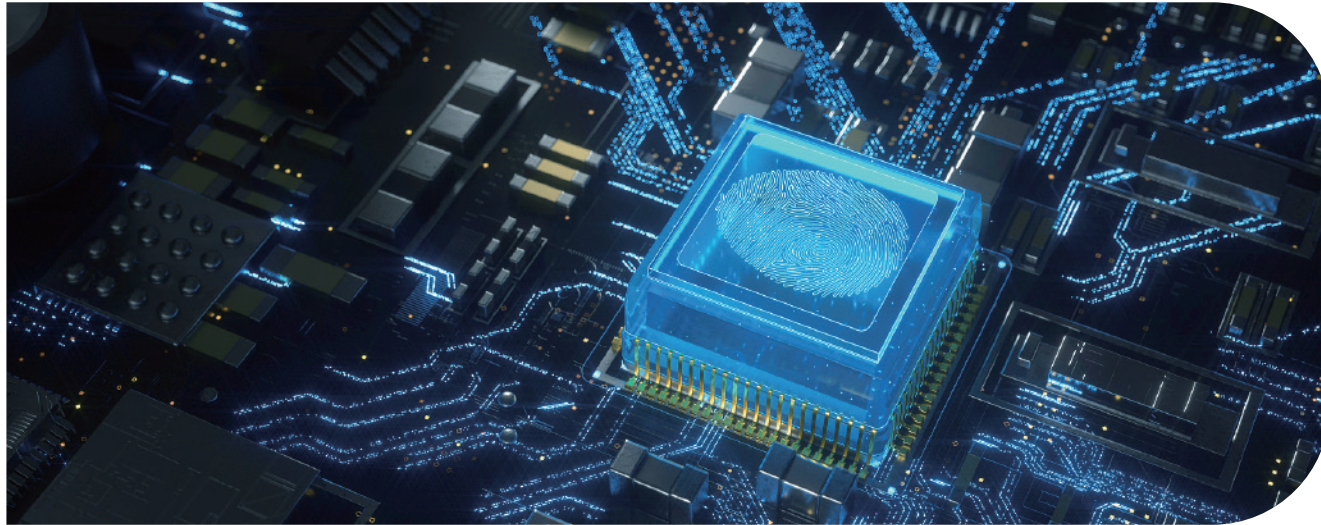

Patented 360° fitted refrigerant cooling technology

Hisense VRF uses refrigerant cooling technology to cool the electrical control box. It overcomes the poor heat dissipation and high ambient temperature issues to maintain efficient operation even at harsh environment. Compared with air-cooled technology, the temperature inside the electrical box can be reduced by up to 20%*. Moreover, the refrigerant cooling kit adds a temperature sensor, which could be more precise to control the refrigerant cooling temperature and ensure the whole reliability.

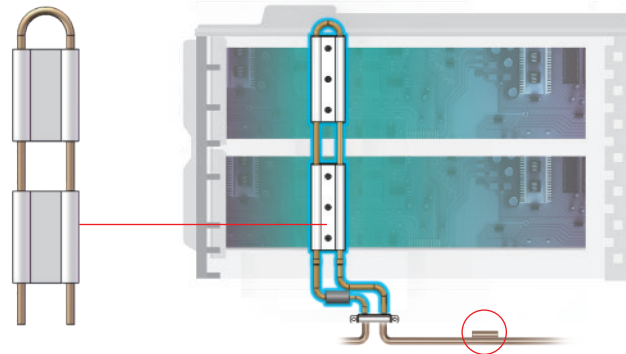


Note

1. * The data is based on the S mavo+ unit under low fan speed operation. 2. Temperature sensor is only available for S mavo+ series.



Insect protection design

Special design nettings are placed on insect easy-entry openings, effectively preventing unnecessary electrical component damages.

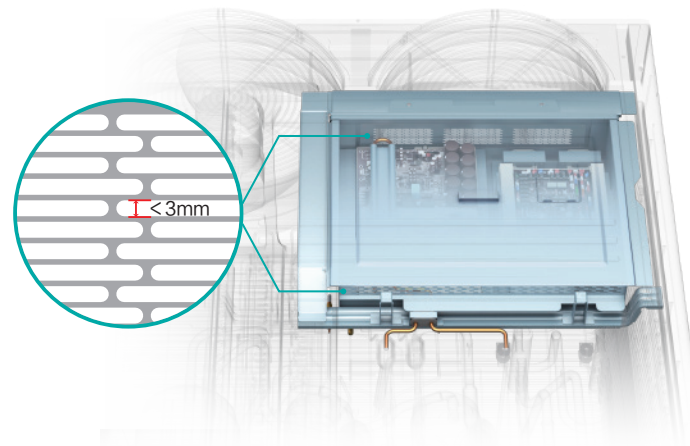

Voltage protector reserved (optional)

Too low or too high voltage can easily damage the electronic components. The new generation of top flow unit has reserved the space for assembling the voltage protector, which can be an effective solution to protect outdoor units from any voltage spikes. The power supply of outdoor unit will be automatically cut off when there is abnormal voltage, and will be restored when power supply returns to normal after 30s. Meanwhile, it's helpful for checking the phase sequence error or phase loss according to the indicator lights, convenient for commission and maintenance.



Can bear **15000** times actions



Can be installed in the factory or on site



Quality electrical and magnetism precaution measure

Air-conditioning unit produced by Hisense VRF requires strict electromagnetic protection and preventive quality assurance to not allow electromagnetic wave from other devices surrounding the unit to interfere the normal operation and function of our unit and vice versa onto other equipment. Another typical damage causes of electronic and electrical failure is sudden high external power source exerted into the electronic compositions like thunder strike during a storm. As to overcome such inevitable natural phenomenon to cause damage, 4000V sudden high voltage test is infused into the long list of electromagnetism quality test in our internationally qualified test lab.




Indoor Unit Reliability



Independent maintenance of indoor unit

To maintain the whole system's continuous operation even when there is a breakdown occurring within the system, Hisense VRF is capable to isolate the faulty unit from the others while conducting restoration and maintaining continuous operation of other units simultaneously. It's especially practical for retail shops or offices where multiple indoor units share the same system.

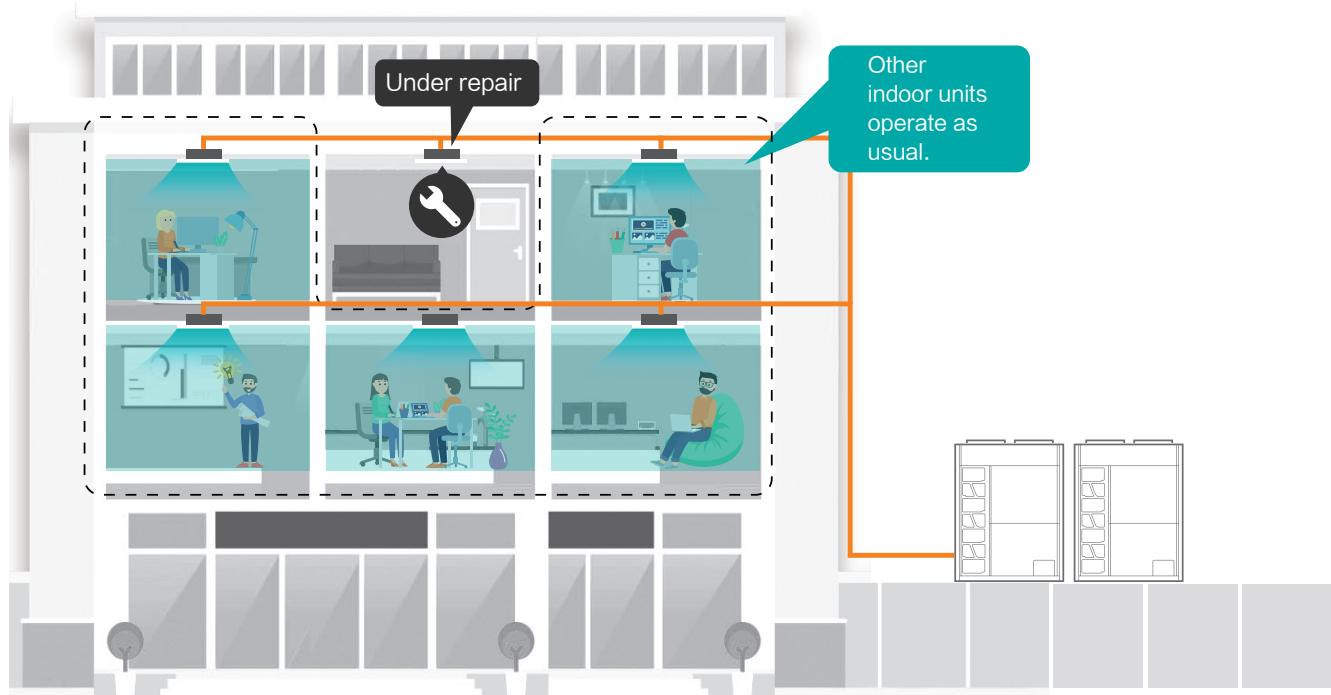


*Preliminary setting is unnecessary




Condensate water leakage protection


Indoor units have build-in water-leakage float switches. Alarming warnings will be displayed on controllers when condensate reaches a certain level. Save your ceiling and carpet from being soaked in time when drain pipe is clogged or drain pump breakdowns.

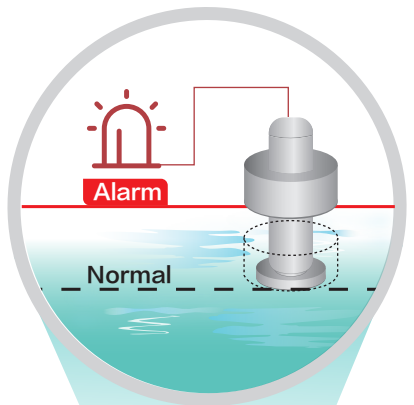

AC unit without float switch

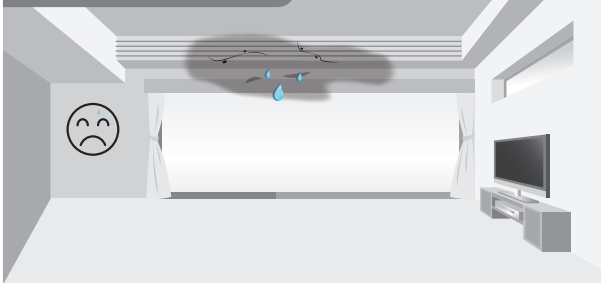

Hisense VRF

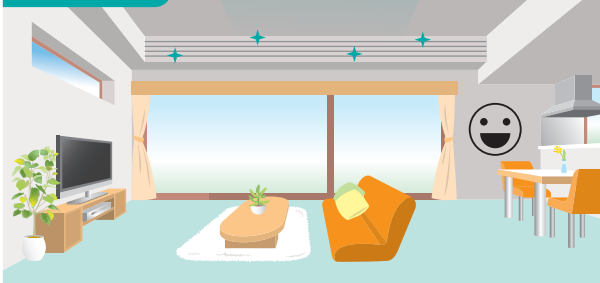

Effective drainage solution

High quality seals

Water could seep through anywhere as long as there is a void. Thus, Hisense utilizes the best quality sealing material to seal up gaps between the heat exchanger and drain pan, which effectively prevents condensate leakage.

Transparent drain pipe

To ease drainage inspection, Hisense indoor units adopt transparent drain hose connection. It enhances installation and maintenance, making sure drain hoses are connected securely and make blockage inspections much easier.

Hisense VRF

EFFICIENCY

Efficient Heat Exchanger

Intelligent Defrosting Logic

Steady Air Discharge



AIR
CONDITIONING
SOLUTION

Efficient Heat Exchanger

New advanced corrugated fin design

The heat exchanger of Hisense VRF adopts the new advanced corrugated fin design. With this new design, larger amount of fins can be allocated into the heat exchanger, increasing 20% heat exchange surface area maximally compared with the last generation fin and the heating capability increase 10% averagely.


Long-time stable heating performance

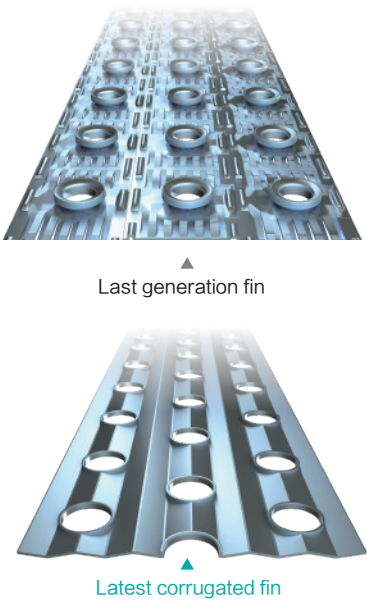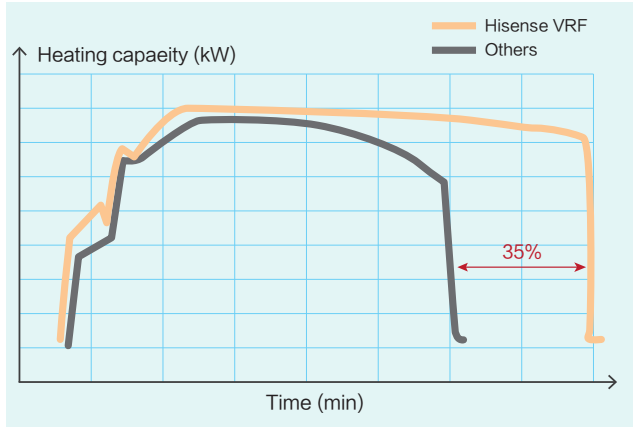


Two-stage subcooling

For the conventional VRF systems without the sub-coolers, the subcooling temperature is about 12.5°C with one-stage subcooling. However, Hisense VRF's 2-stage subcooling technology can realize the subcooling temperature up to 27°C, distinctly improving the cooling capacity by pushing refrigerant further beyond its condensing temperature.

Two-stage sub-cooling cycle diagram

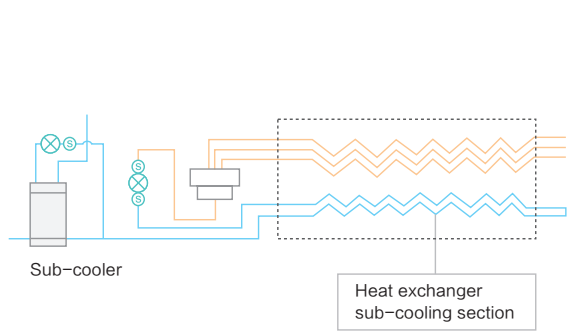


Two-stage sub-cooling pressure enthalpy diagram

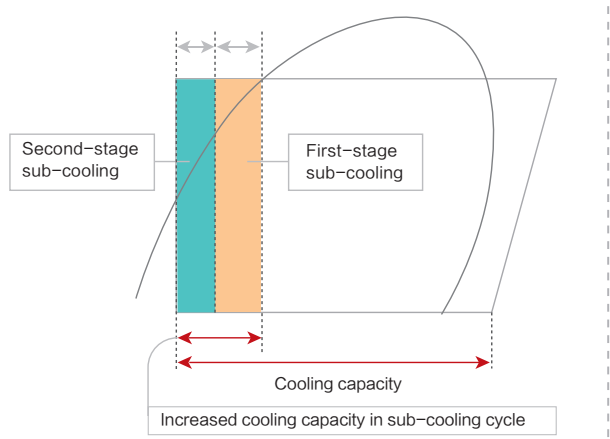



Optimized refrigerant circuit

As refrigerant flows in the system, energy will be lost due to friction and other factors naturally especially when refrigerant change phase, latent heat are lost when gas turns to liquid. Whereby, as more heat is dissipated out, higher the heat exchanger efficiency is. By making full use of heat dissipation, refrigerant flow layout is maneuvered into 2 to 1 refrigerant flow path extends liquid refrigerant's occupancy and eventually the efficiency too.


Conventional technology

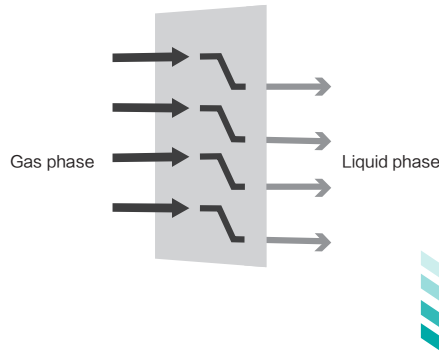

2-to-1 refrigerant flow path

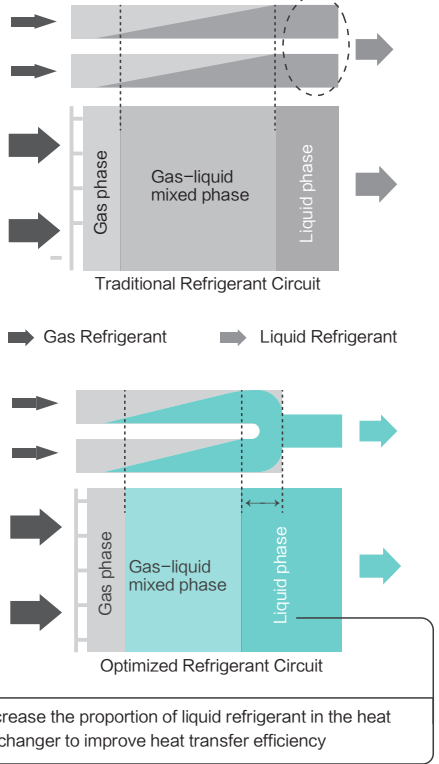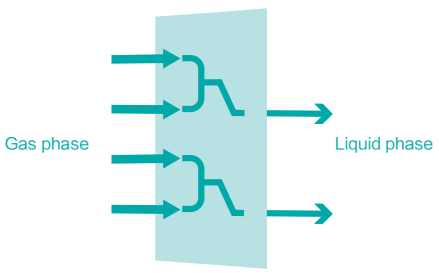

Why does 2 to 1 refrigerant circuit is higher in efficiency?

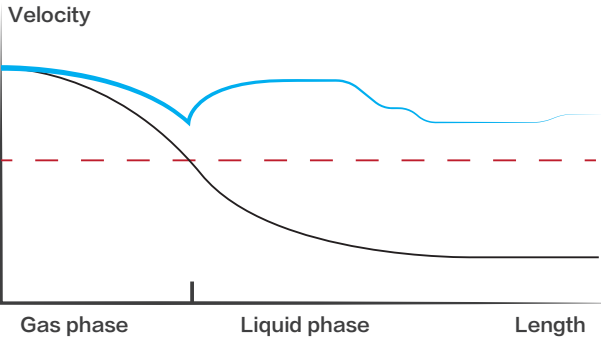


2 to 1 refrigerant circuit:
velocity is maintained same goes to the efficiency of refrigerant heat exchange.

Conventional refrigerant circuit:
Heat exchange slows down with decreased velocity. Efficiency is greatly reduced.

Intelligent Defrosting Logic

PTT defrosting mode

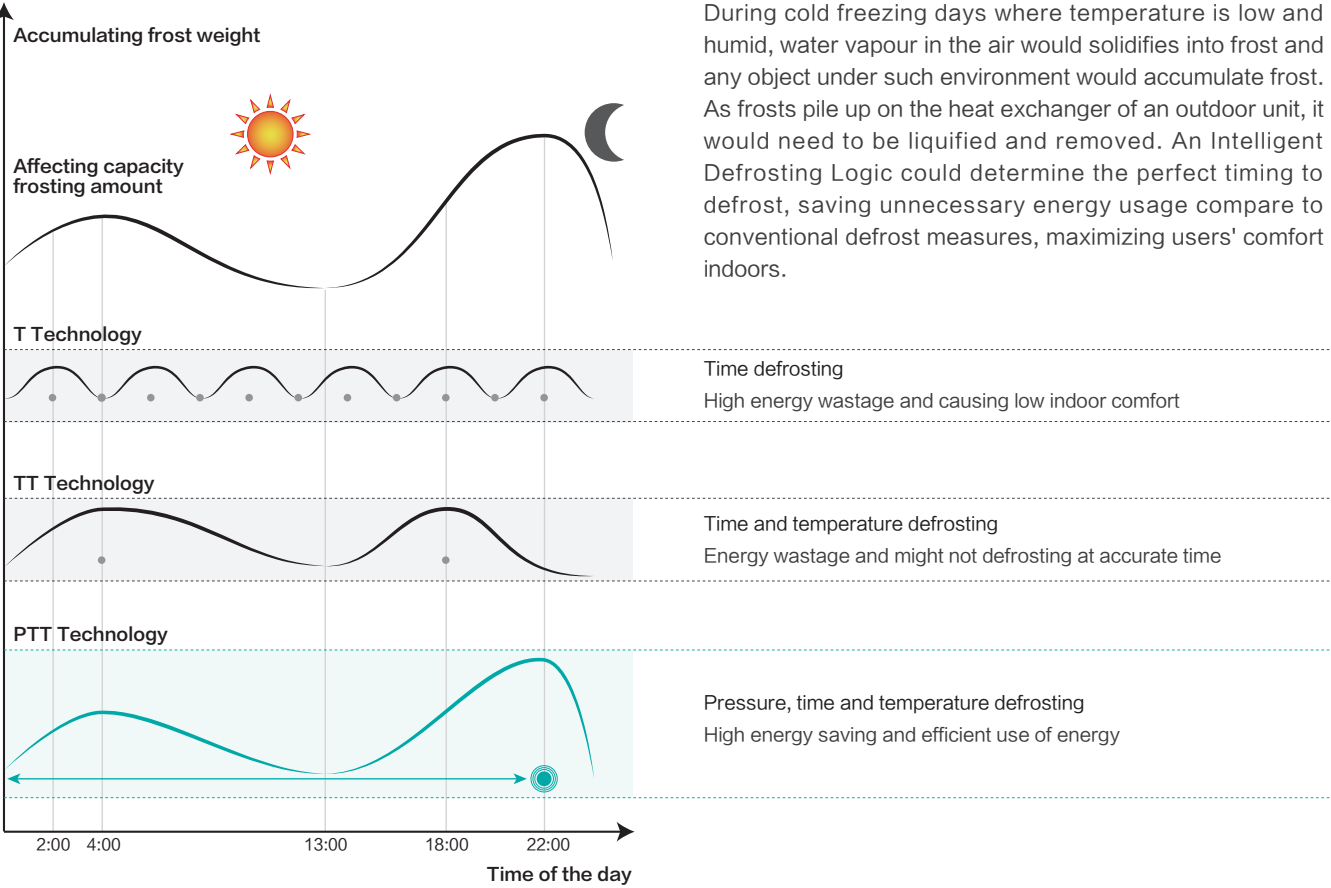


During cold freezing days where temperature is low and humid, water vapour in the air would solidifies into frost and any object under such environment would accumulate frost. As frosts pile up on the heat exchanger of an outdoor unit, it would need to be liquified and removed. An Intelligent Defrosting Logic could determine the perfect timing to defrost, saving unnecessary energy usage compare to conventional defrost measures, maximizing users' comfort indoors.

Bottom anti-frosting structure

To ensure effective frost removal, heat exchanger circuit is extended to the bottom to make sure melted frost from the top does not solidify as it reaches to the condensate drain and hence enhances smooth discharge. In the meantime, the heat also extends frost formation periods whereby prolongs defrost interval.


Extended heat exchange coils, keeping the bottom warm

Smooth continuous condensate drainage

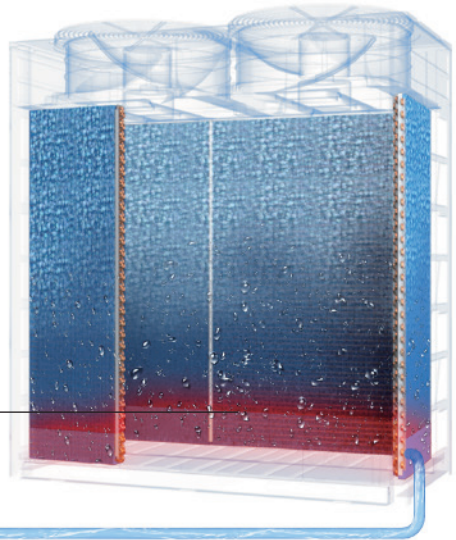

Continuous heating during defrost

The module combination design can achieve rotation defrosting among modules for decreasing indoor temperature fluctuation, so as to improve users' comfort.

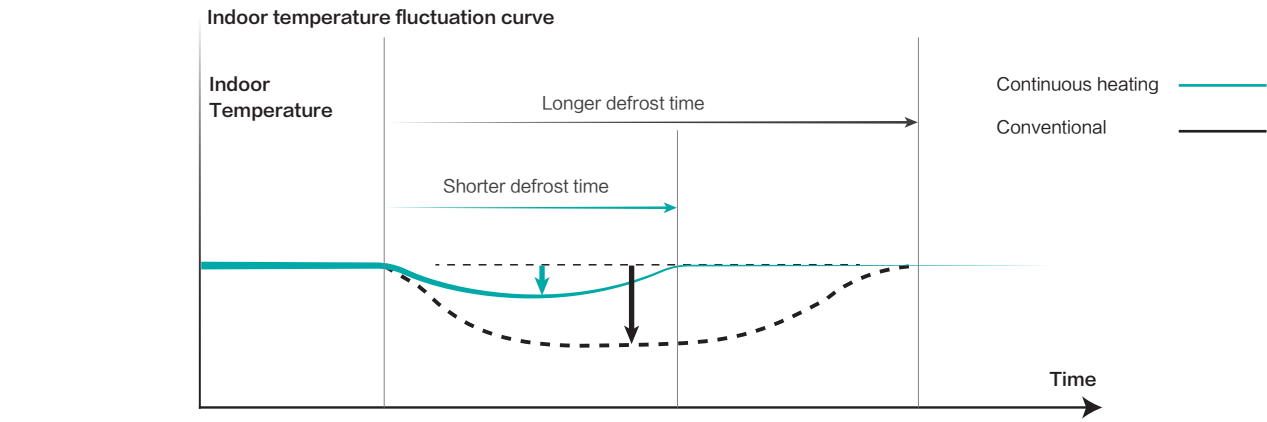

Note
Available for S heat recovery.


Steady Air Discharge



High efficiency aerodynamic axial fan


The propeller bearing which acts as the joint connecting the propeller and motor are specially treated with anti-rain corrosion treatment and propeller made of fiber glass composite is now better corrosion resistance.

Fan blades are aerodynamically designed to reduce energy wastage in converting power consumed to unnecessary noise energy, reserving the energy to improve on flowrate performance and static pressure. Integration with brushless DC fan motor further improves the efficiency and reduces noise of the propeller structure.

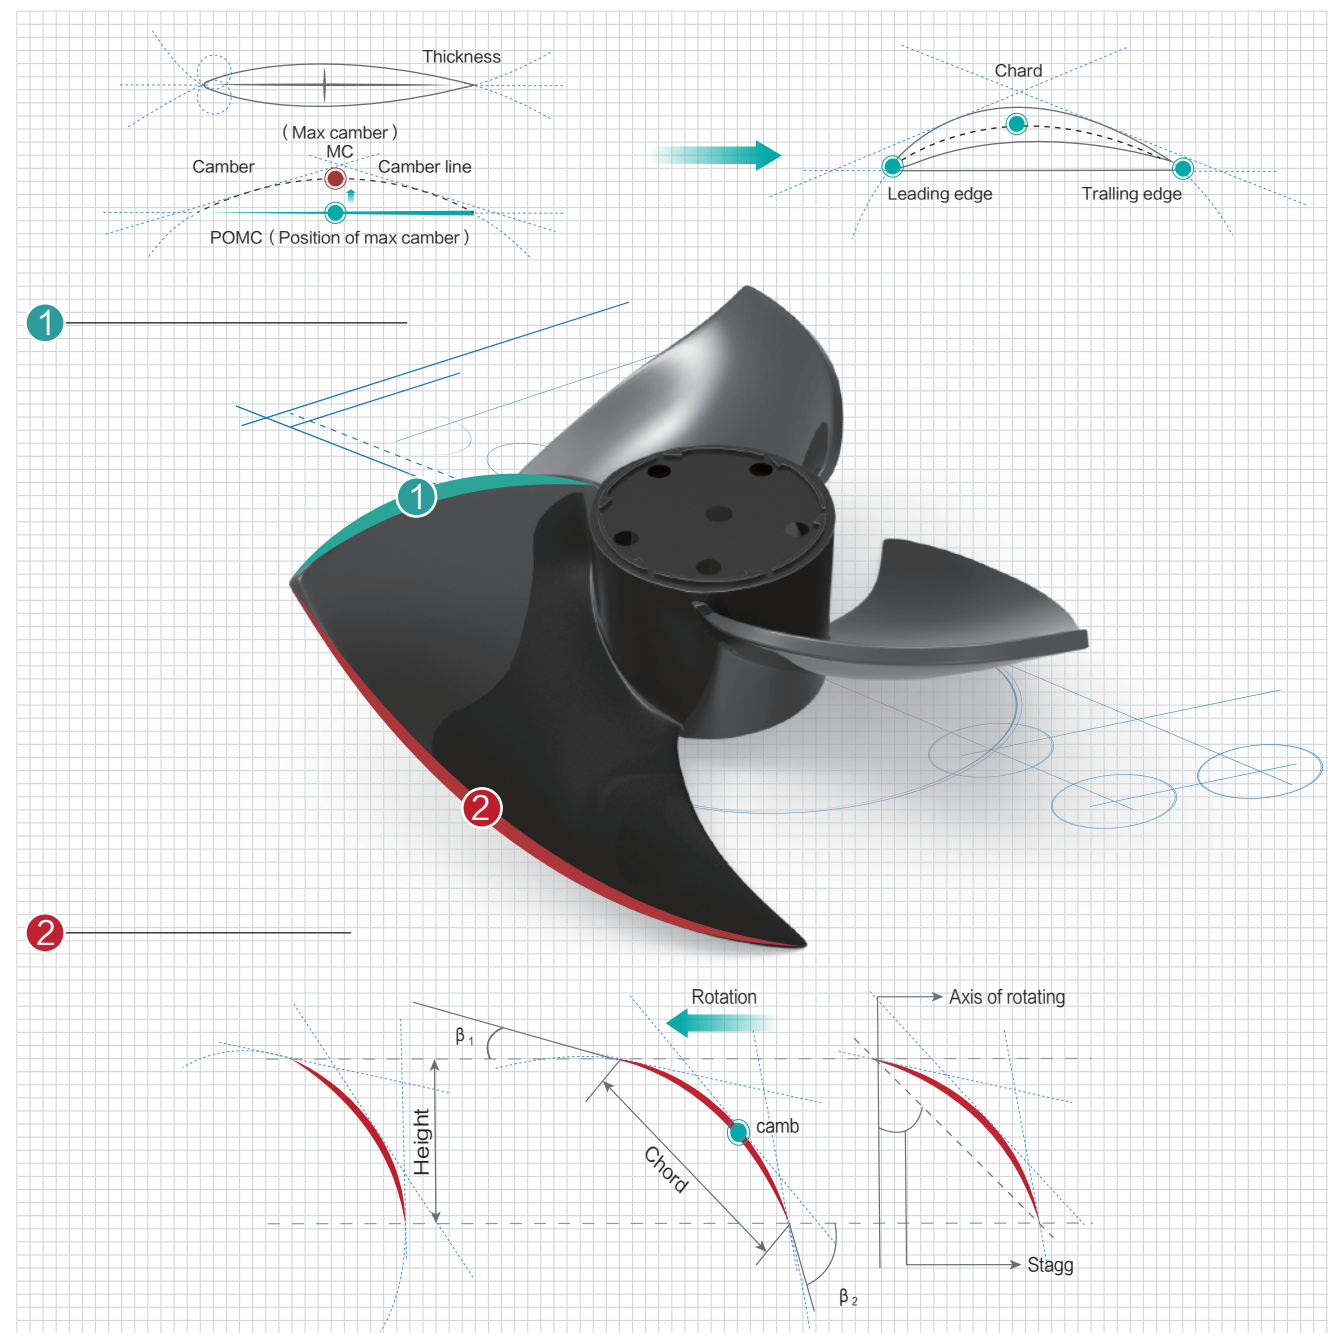

Stepless-smooth fan speed control

Inverter fan motors are now commonly used, where efficiency increase by 40%. Whereas in Hisense VRF, brushless DC fan motors are used, as it could further reduces power consumption and noise production than normal inverter motors.



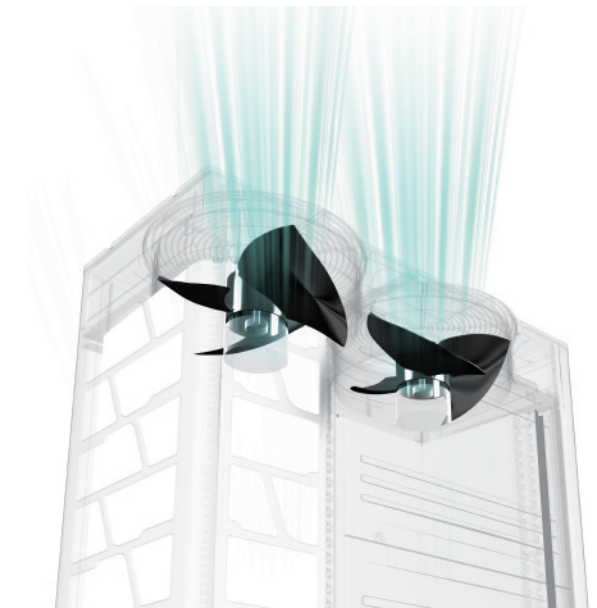


Efficient axial fan



Load Balancing Control (LBC) Technology

By identifying actual load demand in real-time, it adjusts the air volume and temperature automatically to balance the load output of different rooms. It reduces power consumption by 18% during low loads and speeds up temperature adjustments by 50% during high loads.

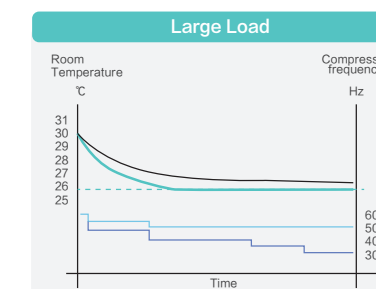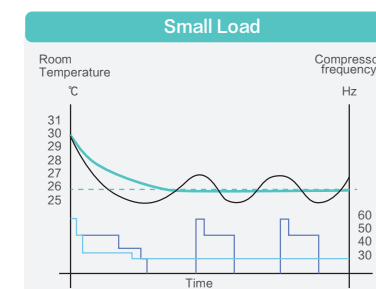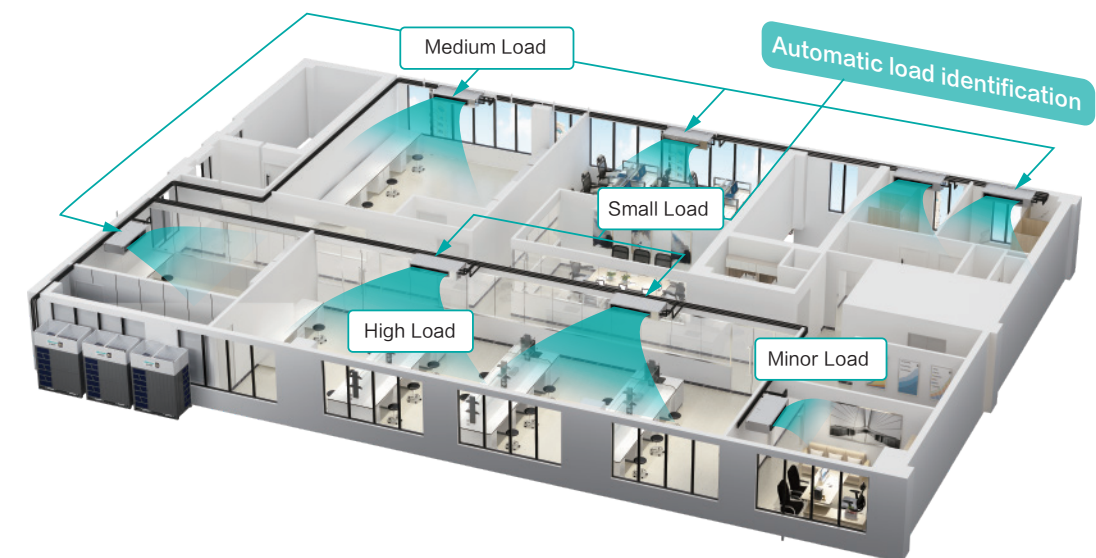

— Temperature under LBC control
— Temperature under conventional control
— Frequency under LBC control
— Frequency under conventional control

Hisense VRF

COMFORT

Smart Air Supply

Lower Noise

Clean Fresh Air

Auto Refrigerant Temperature Control (ART)


VIP Mode

AIR
CONDITIONING
SOLUTION


Smart Air Supply

Precise temperature control

There are multiple temperature sensors equipped in the system, which will be very helpful to judge the indoor load more accurately. Also the 2000-step EEV is specially adopted to ensure precise refrigerant flow adjustment according to the actual load of indoor units, achieving a more comfortable indoor environment with small temperature fluctuation.




2000-step EEV

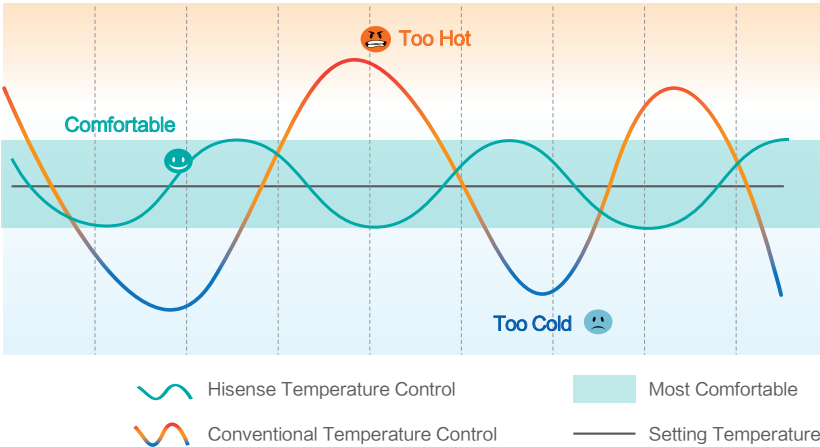

3D air-flow panel(optional)

The 3D air-flow panel with luxurious appearance is available for the low-height ceiling ducted indoor units (optional). The 3D airflow panel can offer even airflow and wide airflow coverage to keep every corners of your room cool or warm. It also has three wind setting, normal mode, 3D mode and super long distance mode, flexible for you choice.

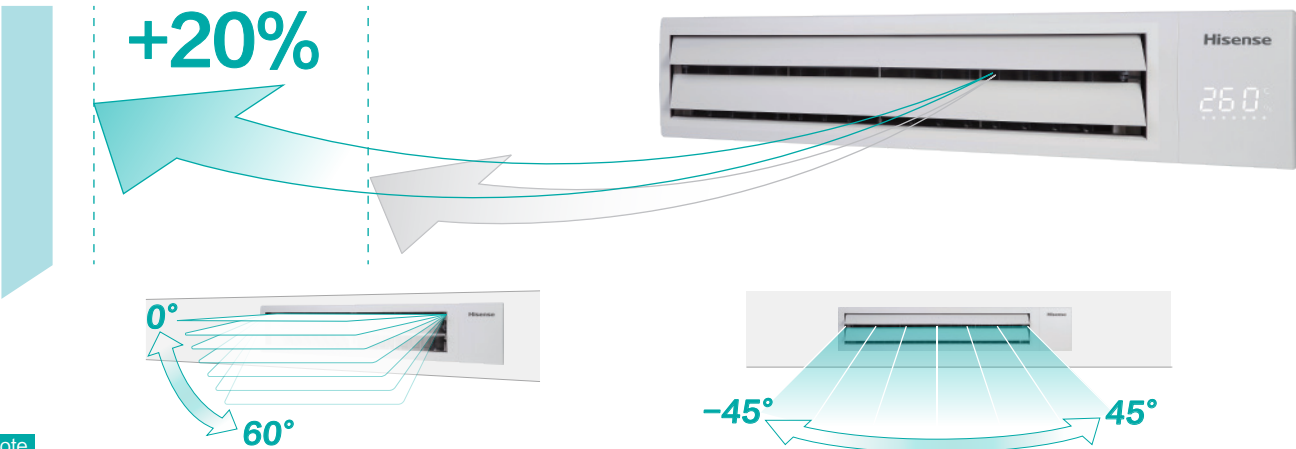


Note
It's optional for the AC/DC low height ceiling ducted unit.

Hi-motion (optional)

Hi-Motion works as an independent human sensor and can be installed separately from indoor unit. It can detect the human activities indoors to provide comfort and energy savings.


1. Automatically turns off the unit when no one is in the room in order to realize energy saving.
2. Adjusting the setting temperature and air flow according to the actual human activity.

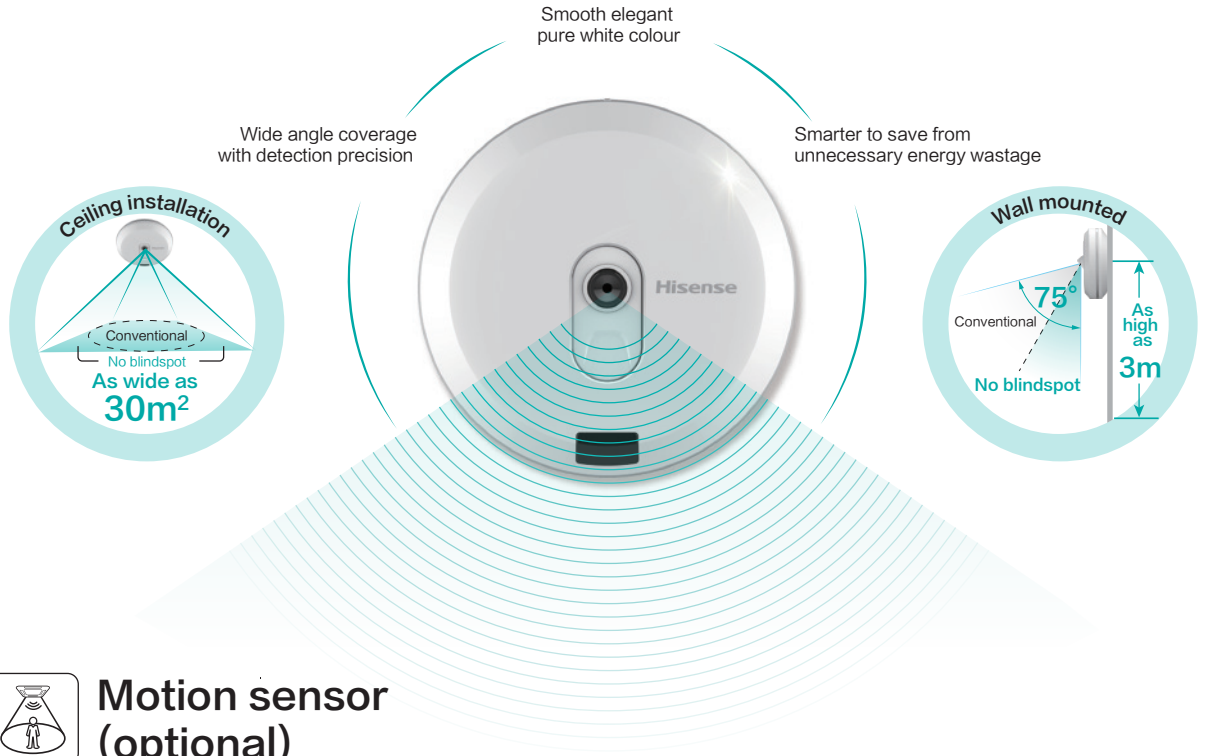

Motion sensor (optional)

Motion Sensor, assembled in the panel of 4-Way Cassette and Mini 4-Way Cassette, can provide a more comfortable environment, and achieve efficient and energy-saving operation of the unit at the same time.


1. With the sensor, indoor unit can be turned ON or OFF automatically when people enter or leave the room.
2. The sensor can automatically detect people's locations, allowing the airflow direction to be adjusted to either target directly or avoid them based on preference.
3. The setting temperature can be changed automatically by detecting the number of people changing.

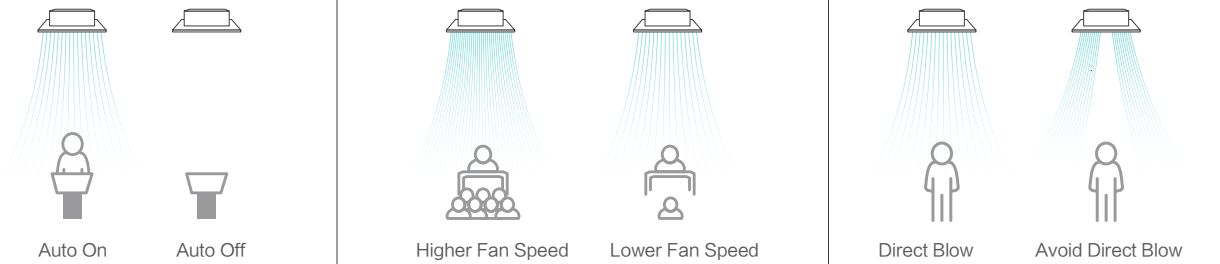

Lower Noise

Lower noise for indoor units

Hisense VRF offers indoor units with sound pressure level as low as 19dB(A), perfectly blending into library, auditorium and hospital rooms where require sound level lower than 25dB(A).

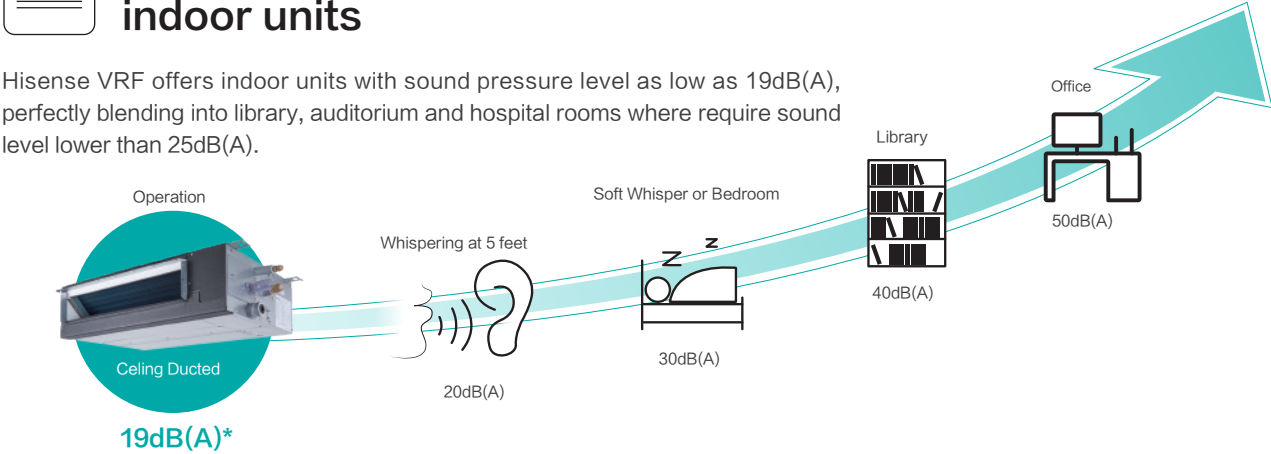


Note
* The DC ceiling ducted (AVD-07HJDH) can achieve the 19dB(A) under the standard test condition.

Outdoor unit noise control

Auto night quiet mode

When outdoor conditions call for special low noise requirements, like in cases where outdoor units are installed in indoor equipment rooms with poor soundproof walls or continuous night operating conditions. The night mode reduces sound pressure levels upto 30% routinely with flexible time intervals to meet different customer needs.

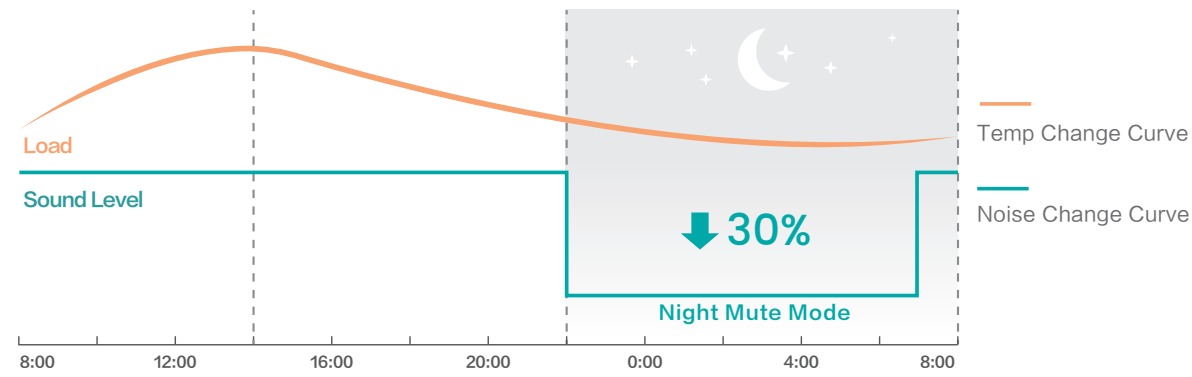


Note
*1 : The night mute mode can last for 8hrs, 9hrs or 10hrs according to the setting.

Low noise mode


Low noise mode can be set by operating the DIP in the PCB. There are multiple levels by set different frequencies of compressor and fan motor speed. What's more, the low noise mode can be achieved by external input signal. The noise can be reduced by up to 14dB(A).

90s Rapid Heating Start-up

To keep you comfortable and cozy as fast as possible, Hisense VRF starts supplying warm air so rapidly with only just 90s reaching a 100% capacity output. Besides, even in extreme whether condition like -15℃ outdoor temperature, Hisense VRF performance is tested with persisting capability to supply 40℃ or higher warm air within 7 minutes.

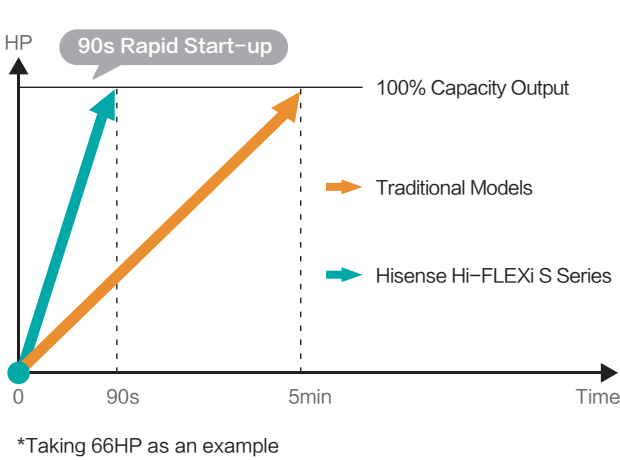


*Taking 66HP as an example

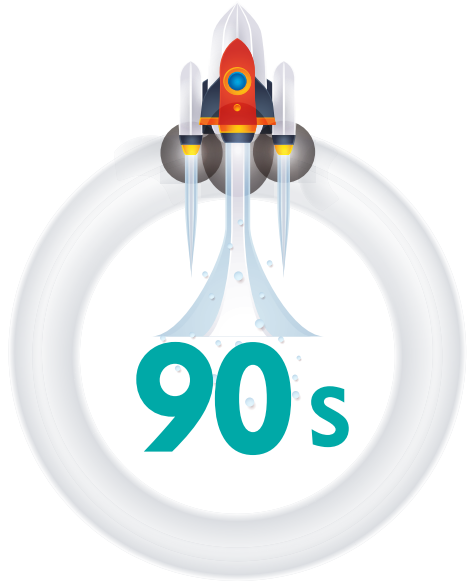

VIP Mode

Hisense VRF offers VIP mode to give priority to the specific room, keeping them comfortable and satisfied as fast as possible and 5 indoor units can be set as VIP mode at the same time. Such function is exclusively practical for hotel application, where AC unit in the presidential suite is often set to VIP mode.

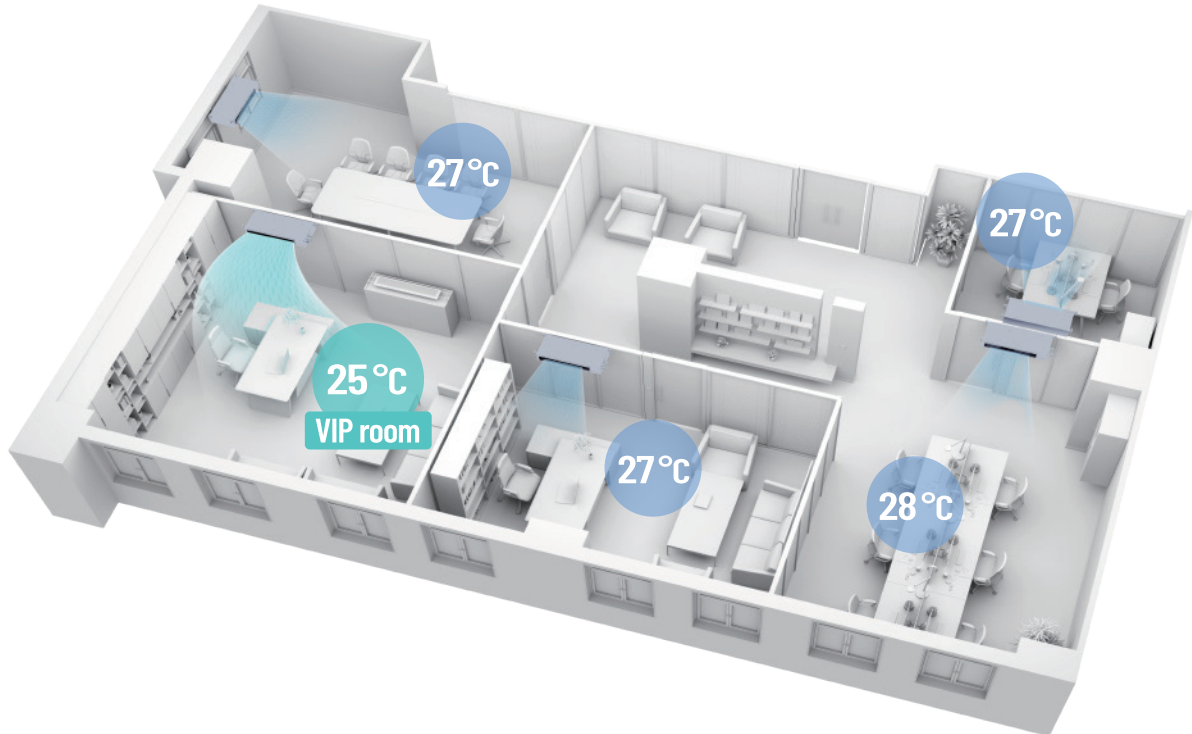

Clean Fresh Air

AirPure

Hisense VRF indoor unit equipped with AirPure kit can release lots of negative ions, about 20 million pcs/cc. These negative ions are carried throughout the room with air-conditioned air flow whereby obtaining air conditioning and air purification simultaneously. With the AirPure kit, the indoor unit has got the Tick Mark certification which is an authentication for air-conditioning sterilization products.



*Take AVE-09HCFRL as the test sample.

Note

4-way Cassette, Mini 4-way Cassette, Console, Ceiling Ducted can be equipped with the AirPure kit (optional).




Humidity sensor (optional)

To keep up with the indoor quality requirements, Hisense VRF offers auto dehumidification function and it can be achieved by choosing a humidity sensor, and the control range is from 35% to 90%.



Fresh air intake

New Hisense VRF indoor units are now infused with a fresh air duct opening for 10% free fresh air introductory directly from outdoor air, creating a comfortable and health environment.

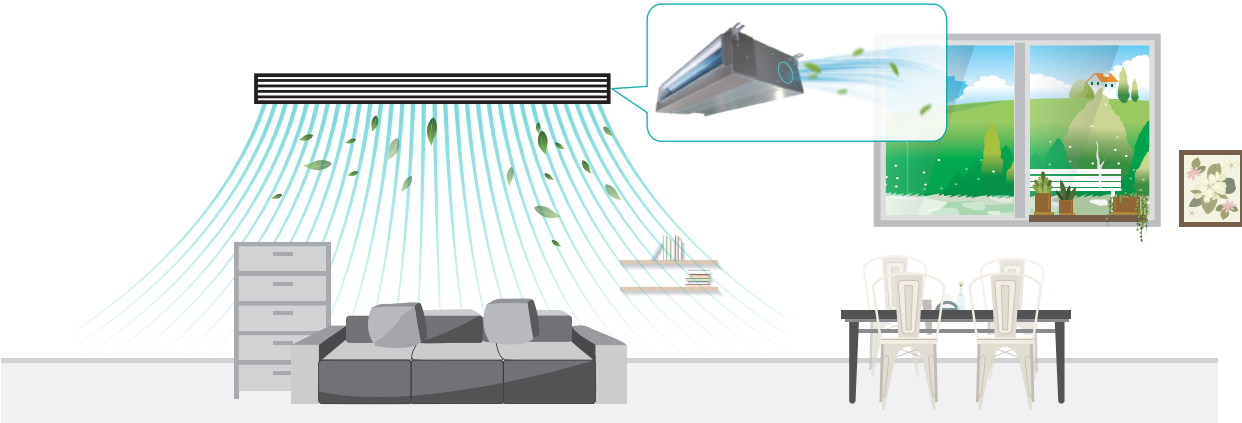

Self-cleaning function

Featured with self-cleaning technology, the evaporator can be self-cleaned automatically, preventing the dust and potentially harmful substances from accumulating on the surface of the heat exchanger. Thus the air blown from the air conditioner is clean and healthy.



Note

The self-cleaning function is available in the wall mounted unit and DC high ESP ceiling ducted unit(AVD-07~AVD-54).

FLEXIBILITY

AIR
CONDITIONING
SOLUTION

Design Flexibility


Installation Convenience

Service & Maintenance Simplicity

Design Flexibility


Interlocking solution using dry contact

3rd party thermostats can be used to control the air conditioner in a room by using the dry contact interface. Indoor units can be interlocked with various types of input signal such as key-card, window contact signal, smoke alarm signal and so on.

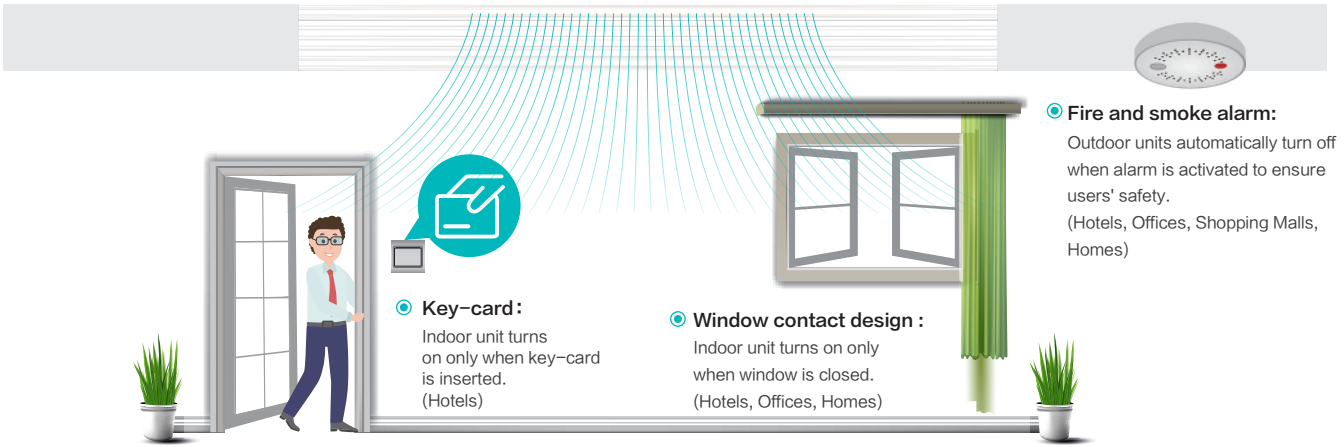

Adaptive fan static pressure technology

External static pressure is essential to determine the air discharge and duct connection distance. Hisense VRF's outdoor unit external static pressure is reachable up to 150Pa. Allowing longer ducting connection for better air discharge when are installed in the equipment platform that is not easy to exhaust.

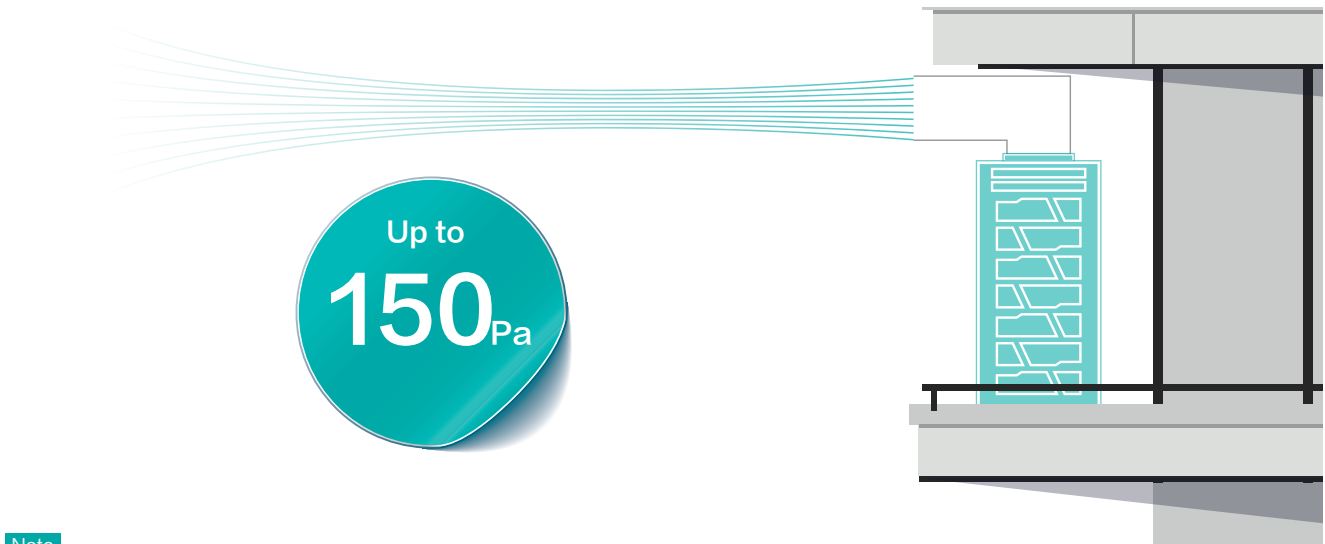

Note
The initial setting of S5 series is 110Pa, and can achieve 150Pa with a pressurization kit.
For detailed information, please contact Hisense technical engineers.


Space-saving with reduced footprint

The footprint of S5 series from 8 to 20HP has been reduced by 15% on average compared to its predecessor with the same capacity, enabling easy transportation via elevators and effortless installation in confined spaces. With a maximum single module capacity up to 42HP, it offers a further 18% space saving compared to previous combination modules, significantly saving valuable floor space.



All in one renewable energy solution

Hisense VRF heat recovery series offers an ultimate solution to satisfy heating and cooling, domestic hot water supply, floor/wall/ceiling cooling and heating simultaneously. The heat recovery system is also compatible with any auxiliary heaters like solar, electric heater and gas boiler to supply additional energy to the system in unfavorable conditions.

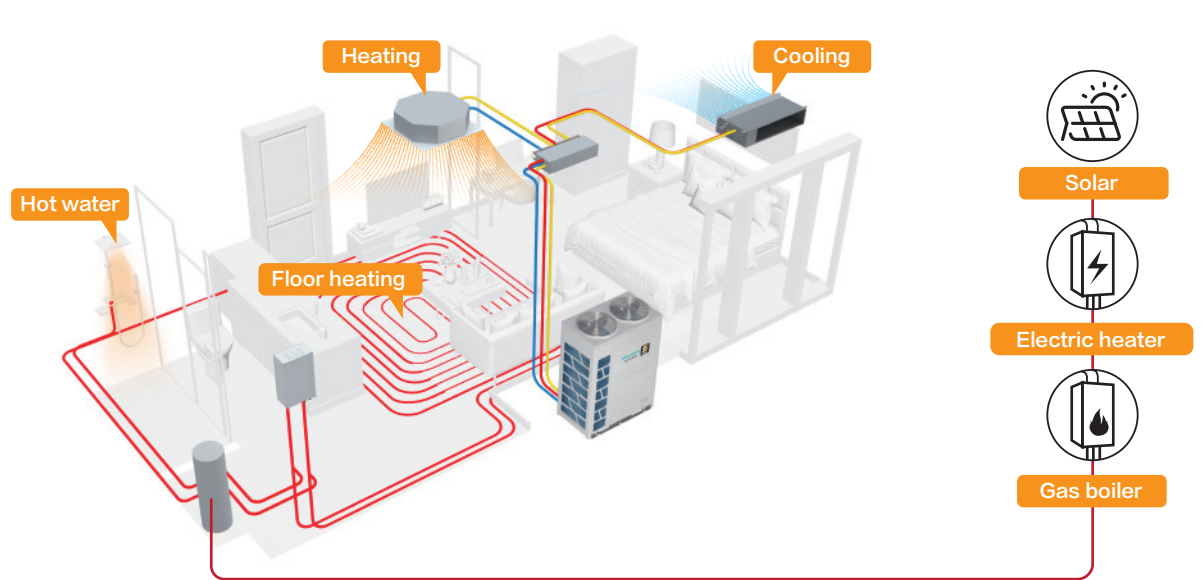

Installation Convenience


Compact and light-weight

With larger capacity per unit, Hisense VRF outdoor units are more compact in size with the largest capacity of single module, leading capacity of a single module in the market. Compact yet reduced overall weight makes transportation much convenient and even fit into elevators.



Error-free communication connection

Communication line connections between outdoor unit to indoor units might be confusing when comes to long cables from the outdoors to the indoors and vice versa. It is often incorrectly connected and caused various errors affecting the end user's comfort levels. Despite of Hisense VRF's simple wiring connection ports, the outdoor unit itself could also check on the connections and display warnings when the connections are improper.

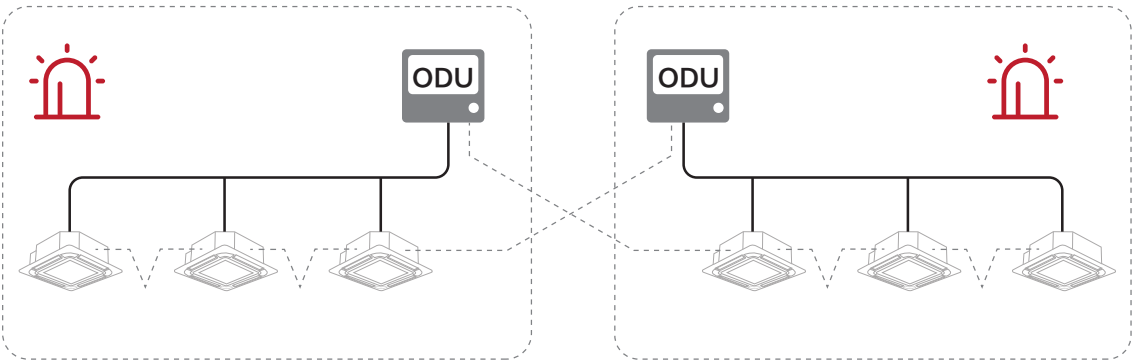

Indoor units from different systems are connected to the incorrect outdoor unit, alarm codes flashes out warning installers to make proper corrections.

Intelligent matching IDUs

Match all kinds of hisense indoor units. If each air deflector can be controlled independently, the key will light. On the contrary, the key will dim and you can not click.




One-touch refrigerant recycle

Hisense VRF has one-touch refrigerant recycle function. Just with a press of the button on the PCB, the refrigerant can be recycled directly, it is very helpful and convenient when the indoor units or the compressor are under repair.




Scan the QR code to view the detailed introduction

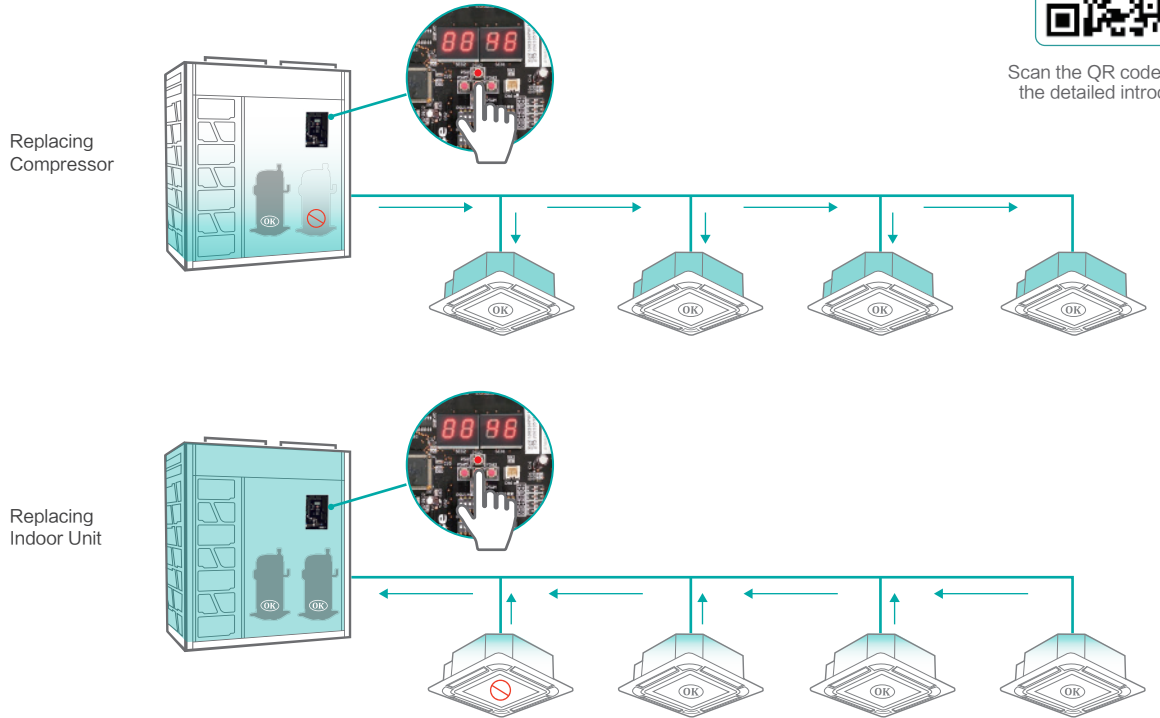

Service & Maintenance Simplicity

Automatic address distribution

The system can automatically distribute addresses for indoor units, no need to manually set the address one by one. This feature greatly simplifies the installation and commission process.

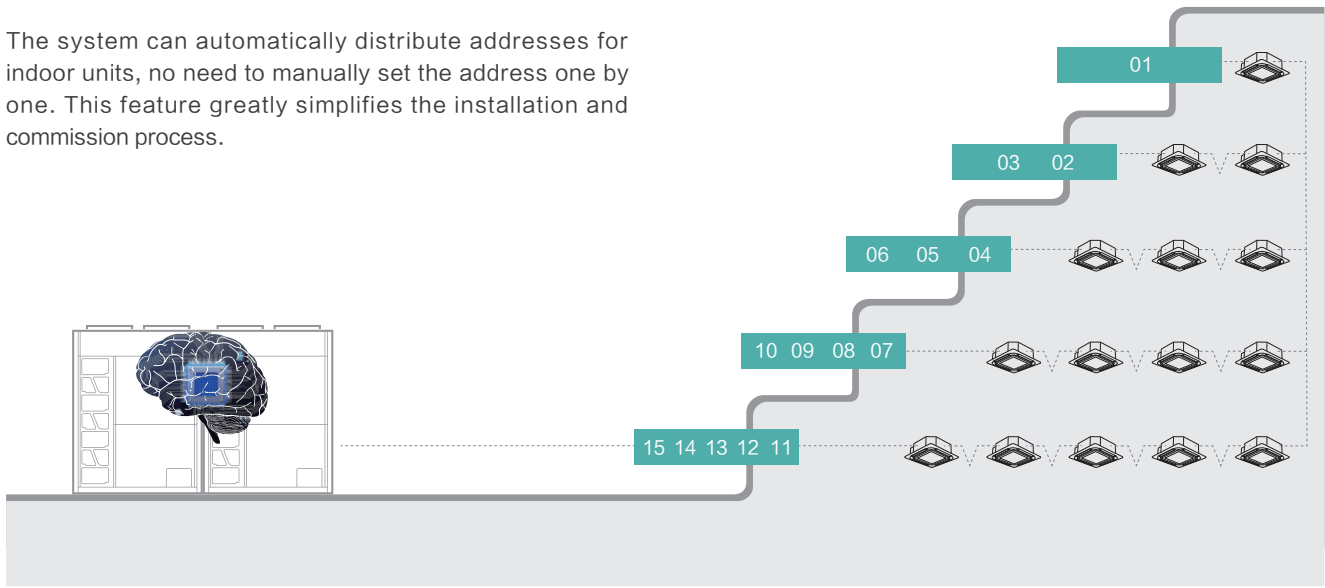


Safe and convenient system management

The new outdoor units are equipped with a service window on top of the electrical box protection panel for easy access to parameters checking and maintenance manipulation safely without exposing to high voltage segments of the electric box. With the new service windows, press switch buttons, DIP switches and the 7 segment LED operation are made safer and more convenient to operate.




Separated mechanical & electrical compartment

The outdoor unit's mechanical and electrical segments is now designed and optimized repositioned separately for a more organized maintenance. The electrical and electronics are placed on top of the compressors and accumulator to meet the practical law of center of gravity, hence minimizing toppling accidents and unnecessary vibration produced during operation. Besides, it also maximizes the heat dissipation of electrical box to keep the electrical in a stable temperature by maximizing airflow passed by.

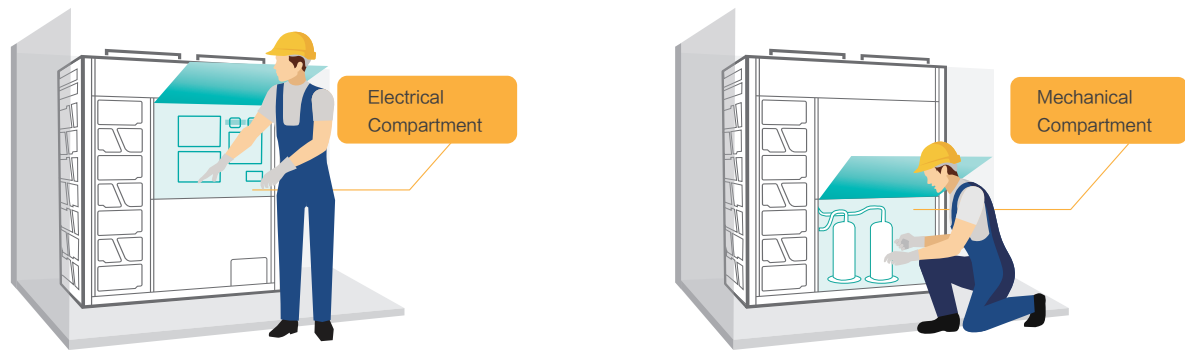

Accurate intelligent system diagnosis

Exclusive Hi-Checker is a super intelligent service tool for system diagnosis, which can provides easy access to service parameters. Detail operation status and recent error history can be checked and analyzed by using Hi-Checker.

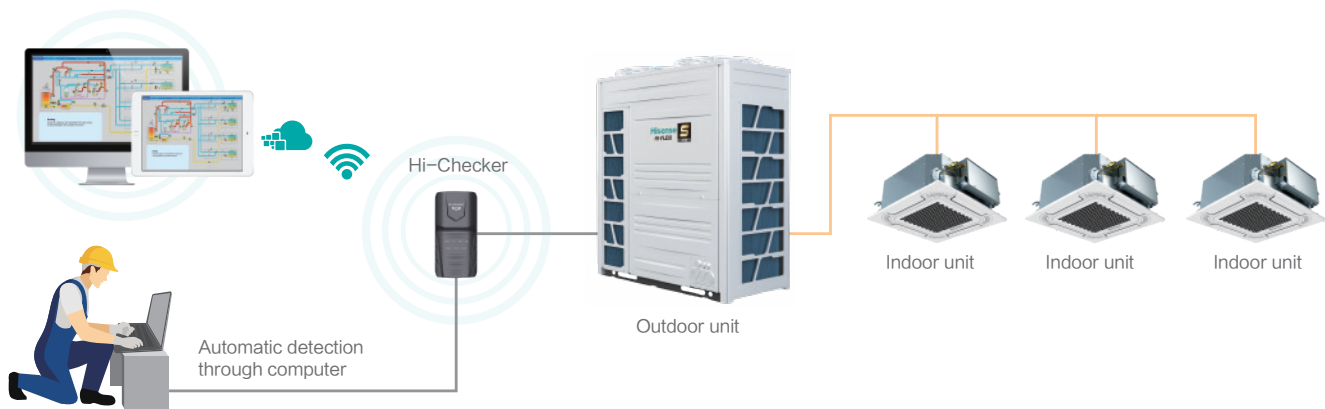

OUTDOOR UNITS

Hi-FLEXi S5 Series

Hi-FLEXi S Series Heat Recovery

Hi-FLEXi S mavo+ Series

Hi-FLEXi X3 Series

Hi-FLEXi W Series


Hi-Smart H5 Series

Hi-Smart A Series

Hi-Smart L+ C+ Series

Hi-Smart H Series

Hi-FLEXi S5 Series

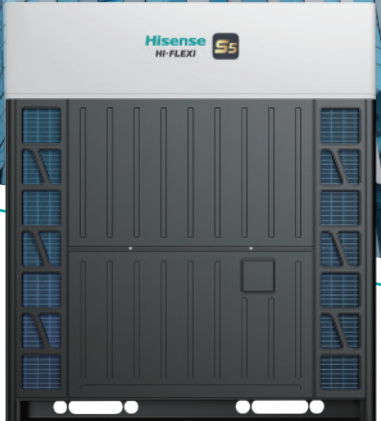


IP55 Electrical Control Box:

- Smaller size
- Fully-sealed
- PCB Micro-channel Refrigerant Cooling
- Ventilation Fans



Larger fan with higher airflow and lower noise

DC Fan Motor

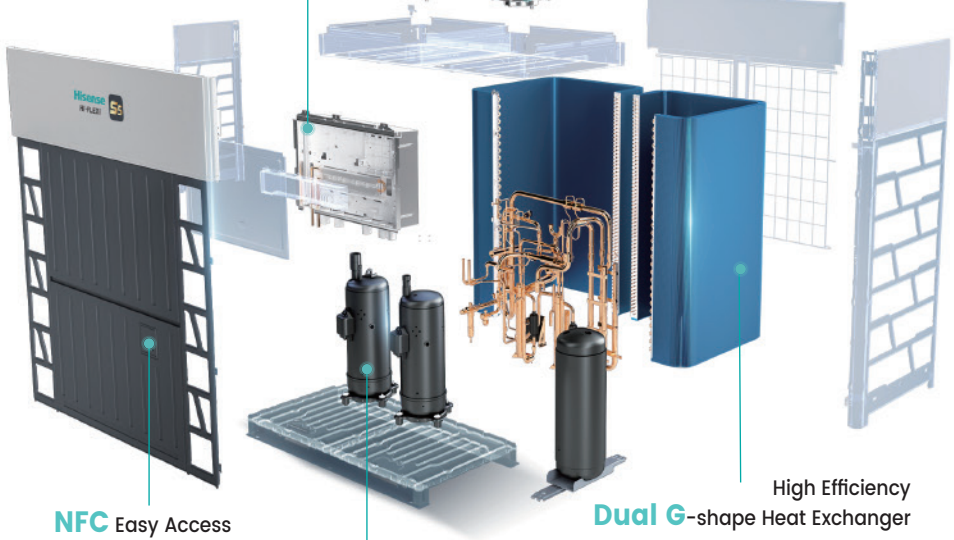



NFC Easy Access

High Efficiency Dual G-shape Heat Exchanger

- Enhanced Vapor Injection DC Scroll Compressor
- Electromagnetic Heating Technology

Electromagnetic Heating Technology

The new generation of compressor adopts electromagnetic heating technology, which directly heat the lubricating oil inside the fixed rotor instead of traditional external electric heating belt. With this technology, power consumption can be reduced by 40% and the heating speed improved by 50%.

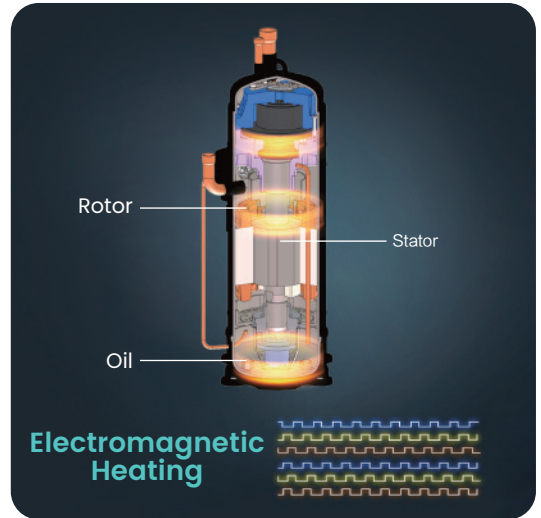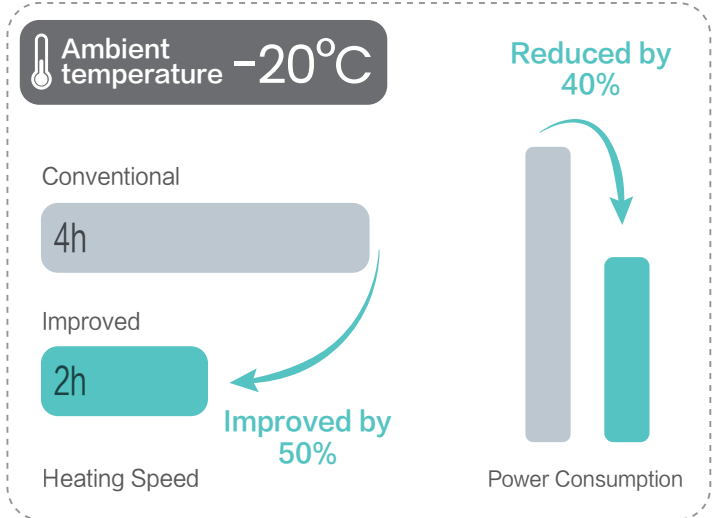

2W Standby Mode

During long-term standby periods such as holiday or transition season, traditional devices often result in unnecessary energy waste. Hisense S5 Series tackles this issue with its innovative 2W standby mode and circuit design, which not only saves on your electricity bills but also contributes to environmental protection, making the S5 Series a smart choice for both your wallet and the planet.



Aerodynamic Axial Fan

New Enlarged Fan Design

The newly designed $\Phi 750\text{mm}$ large-diameter axial fan can reduce the turbulence around the fan, leading to a 5% increase in static pressure efficiency, a 3dB(A) reduction in noise levels, and a 21% decrease in power consumption for the same airflow volume.




Anti-headwind Function

The ODU fans might be blown to the opposite direction when caught in a heavy wind. If the unit suddenly turns on, the fan will rapidly switch from spinning backward to forward, which may damage the fan blades. To prevent this, the S5 series is designed to first stabilize the fan before it starts up and rotate in the correct direction, protecting the fan blades from damage.



Dust-removal Function

In case of heavy sandstorm or long-term use, the heat exchanger can get clogged by dirt, resulting in a decrease in heat transfer effect and an increase in energy consumption. Hisense innovative "Dust Removal" function solves this problem. The fans automatically blow in reverse for 1 to 5 minutes to remove dust from heat exchanger when turned on, off, or both, thereby enhancing product performance and reducing energy use.

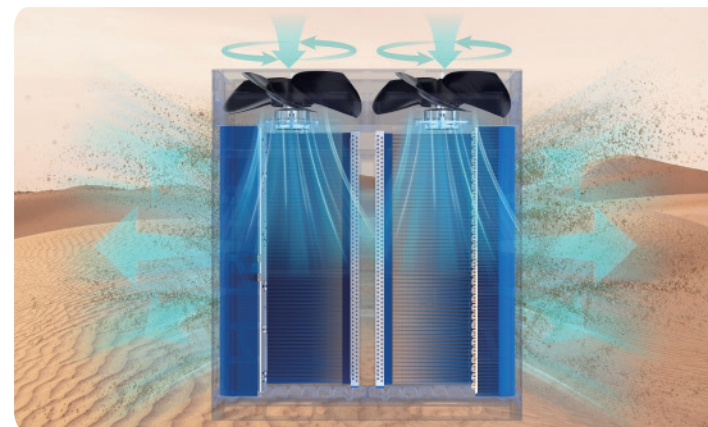

IP55 Electrical Control Box

Smaller Size

By adopting miniaturized components and dual-sided layout, the size of electrical box is reduced by 18% to 54% compared to the previous types, making installation more convenient. This design also greatly widens the air duct space, reduces wind resistance, thus improving air circulation rate and increasing heat exchange by 6%.




Fully-sealed

The IP55 electric control box features four layers of sealing to prevent rain, snow, sand, dust, insects and fire from entering. It ensures the durability of electrical components and reliability of unit operation.




Micro-channel Refrigerant Cooling PCB

The box is cooled by micro-channel refrigerant cooling technology, with thermal resistance reduced by 20% compared to previous copper-aluminum refrigerant pipes. This innovation lowers the internal temperature of the box by 5°C to 10°C compared to traditional air-cooling methods.

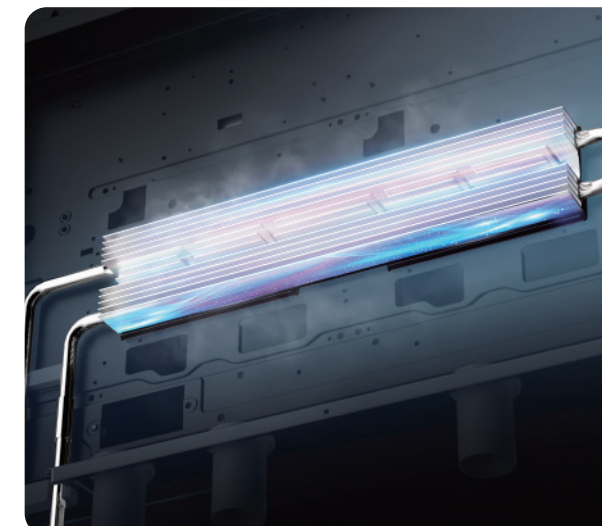


Ventilation Fans

Additionally, the addition of ventilation fans at the back of the box further aids in efficient heat dissipation and temperature reduction by accelerating internal air flow.

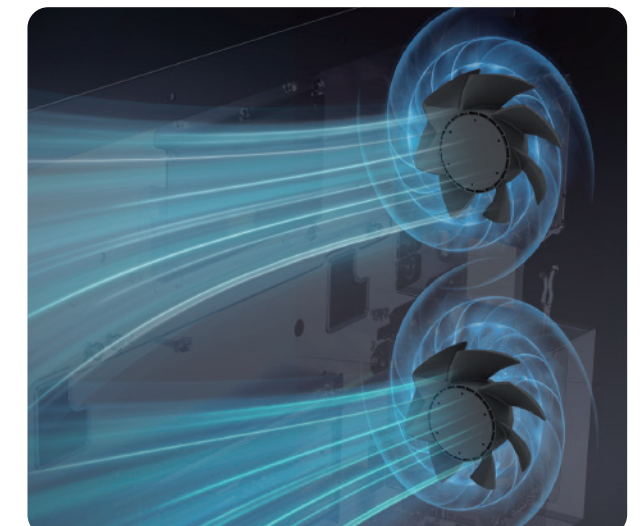

Resistant to Harsh Environments

The Hi-FLEXi S5 series has been rigorously tested in a variety of harsh environments, including extreme heat and humidity, freezing rain, heavy snowfall, severe typhoons, and even strong earthquakes, etc. These comprehensive tests have consistently proven its exceptional quality and reliable performance, even under the most challenging conditions.

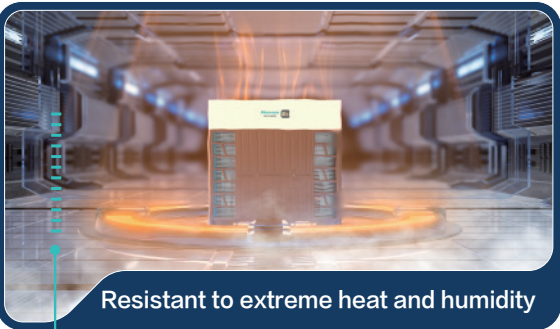

Resistant to extreme heat and humidity

Test Condition: Tested for 24 hours at 60°C with 95% humidity



Resistant to freezing rain

Test Condition: Sprayed with a water flow rate of (12.5±0.625) L/min until ice formation reaches 6mm, and then operated continuously at -7°C for over 3 hours



Resistant to severe typhoon

Test Condition: Tested for 10 minutes at a simulated hurricane wind speed of 61.2m/s (Category 4)
*Note: According to Saffir-Simpson Hurricane Wind Scale.



Resistant to M9 earthquake

Test Condition: Continuous testing under simulated magnitude 8 to 9 earthquake without any additional protection structure


Automatic Refrigerant Management

Refrigerant self-charging

The S5 series maintains optimal refrigerant level through high-precision automatic refrigerant charging technology, which promotes stable and reliable performance while maximizing energy efficiency. Besides, the process has been greatly simplified compared to conventional manual refrigerant charging, making installation and maintenance easier and more efficient.




Refrigerant detection

Conduct one-touch detection to identify the refrigerant leakage quickly in case of poor cooling and heating performance, so as to improve the maintenance convenience and efficiency.



Load Balancing Control (LBC) Technology

By identifying actual load demand in real-time, it adjusts the air volume and temperature automatically to balance the load output of different rooms. It reduces power consumption by 18% during low loads and speeds up temperature adjustments by 50% during high loads.

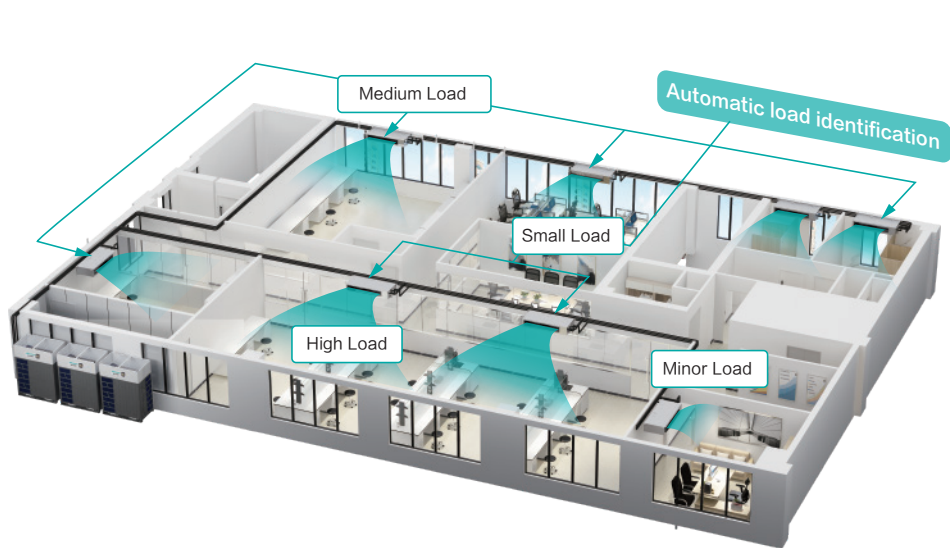

— Temperature under LBC control
— Temperature under conventional control
— Frequency under LBC control
— Frequency under conventional control

Flexible Installation with Long Piping

The S5 unit has been optimized for piping, with a maximum total piping length of 1100m and a maximum single pipe length of 220m(equivalent length 260m). Additionally, the maximum connection ratio has also been increased from 30% to 200%* to greatly simplify project design.

Total piping length: **1100m**


① Maximum actual length of a single pipe: **220m** (equivalent length **260m***)

② Maximum length from the first branch pipe to the farthest indoor unit: **90m**

③ Maximum height difference between indoor and outdoor units: **110m***

④ Maximum height difference between indoor units: **40m***

*Note: For detailed information, please contact Hisense technical engineer.

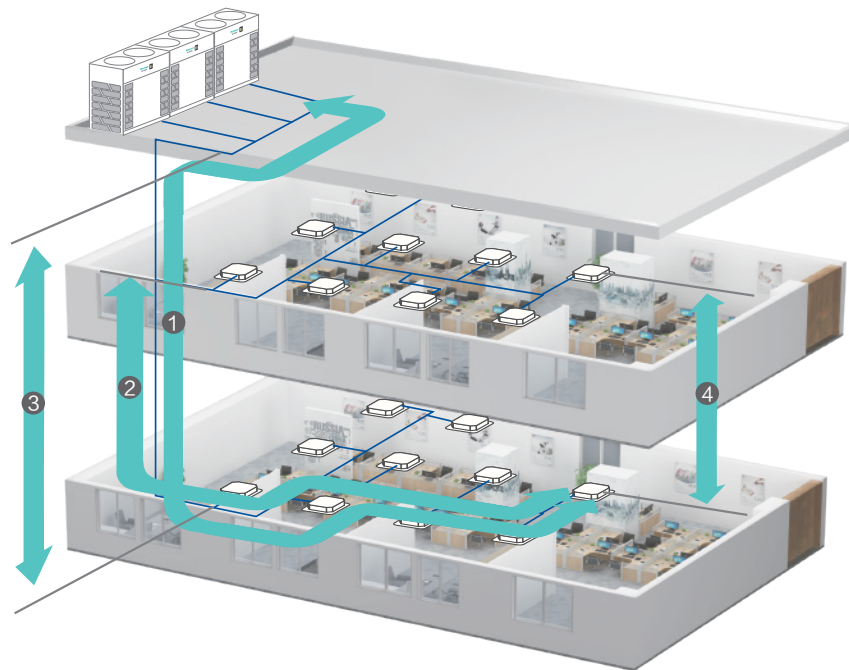

Hi-FLEXi S5 Series



HP				8HP	10HP	12HP	14HP	16HP
Model	Modules			AVWT-76HKF5	AVWT-96HKF5	AVWT-114HKF5	AVWT-136HKF5	AVWT-154HKF5
				AVWT-76HKF5	AVWT-96HKF5	AVWT-114HKF5	AVWT-136HKF5	AVWT-154HKF5
				/	/	/	/	/
				/	/	/	/	/
	Power Supply			380-415V 3~ 50Hz/60Hz				
Cooling	Capacity*1	kW	22.4	28.0	33.5	40.0	45.0	
		kBtu/h	76.4	95.5	114.3	136.5	153.5	
	Power Input	kW	4.70	6.54	7.96	9.64	11.19	
	EER	kW/kW	4.77	4.28	4.21	4.15	4.02	
Heating	Capacity*1	kW	25.0	31.5	37.5	45.0	50.0	
		kBtu/h	85.3	107.4	127.9	153.5	170.6	
	Power Input	kW	5.09	6.70	8.50	10.32	11.68	
	COP	kW/kW	4.91	4.70	4.41	4.36	4.28	
Ventilation	Air Flow Rate	m³/min	177	177	183	225	275	
	Fan Quantity	pcs	1	1	1	1	1	
	External Static Pressure	Pa	110	110	110	110	110	
Sound	Sound Pressure Level*2	dB(A)	56	57	59	59	60	
Compressor	Type	—	Enhanced Vapor Injection Scroll Compressor					
	Quantity	pcs	1	1	1	1	1	
Refrigerant	Type	—	R410A					
	Pre-charged Amount	kg	6.2	6.2	6.2	7.3	7.6	
Weight	Net	kg	211	211	211	222	245	
	Gross	kg	233	233	233	249	269	
Dimensions	External (H × W × D)	mm	1800 × 800 × 825				1800 × 940 × 825	
	Packing(H × W × D)	mm	1960 × 860 × 885				1960 × 1000 × 885	
Cabinet Color	—		Gray + White					
Ref. Piping	Gas	mm	Φ 19.05	Φ 22.20	Φ 25.40	Φ 25.40	Φ 28.60	
		inch	3/4	7/8	1	1	1-1/8	
	Liquid	mm	Φ 9.53	Φ 9.53	Φ 12.70	Φ 12.70	Φ 12.70	
		inch	3/8	3/8	1/2	1/2	1/2	
Connectable Indoor Units	Quantity	pcs	18	20	24	28	32	
	Connection Ratio*3	—	30%~200%	30%~200%	30%~200%	30%~200%	30%~200%	
Piping Design	Height Difference Between ODU and IDU	m	110	110	110	110	110	
		m	40	40	40	40	40	
	Max. Piping Length	Actual m	220	220	220	220	220	
		Equivalent m	260	260	260	260	260	
Operation Range	Cooling	℃	~15℃ DB ~55℃ DB	~15℃ DB ~55℃ DB	~15℃ DB ~55℃ DB	~15℃ DB ~55℃ DB	~15℃ DB ~55℃ DB	
	Heating	℃	~30℃ WB ~30℃ DB	~30℃ WB ~30℃ DB	~30℃ WB ~30℃ DB	~30℃ WB ~30℃ DB	~30℃ WB ~30℃ DB	

Notes:
1. Rated cooling capacity and rated heating capacity are tested in the following conditions:
Cooling Conditions: indoor air inlet temperature: 27℃ DB 19℃ WB, outdoor air nlet temperature: 35℃ DB, pipe length: 7.5m, pipe height difference: 0m.
Heating Conditions: indoor air inlet temperature: 20℃ DB, outdoor air nlet temperature: 7℃ DB 6℃ WB, pipe Length: 7.5m, pipe height difference: 0m.
2. The above noise values are measured in the anechoic chamber without reflected echo, therefore the impact of the reflected echo must be included at the scene.
Measurement point: 1m from the service cover surface and 1.5m from the floor level.
3. When the connection ratio is lower than 50% or higher than 130%, please consult our local technical engineers.

Hi-FLEXi S5 Series



HP			18HP	20HP	22HP	24HP	26HP
Model			AVWT-170HKF5	AVWT-190HKF5	AVWT-212HKF5	AVWT-232HKF5	AVWT-250HKF5
			AVWT-170HKF5	AVWT-190HKF5	AVWT-212HKF5	AVWT-232HKF5	AVWT-250HKF5
Modules			/	/	/	/	/
			/	/	/	/	/
			/	/	/	/	/
Power Supply			380-415V 3~ 50Hz/60Hz				
Cooling	Capacity*1	kW	50.4	56.0	61.5	68.0	73.5
		kBtu/h	171.9	191.0	209.8	232.0	250.7
	Power Input	kW	12.79	14.70	17.28	18.53	20.76
	EER	kW/kW	3.94	3.81	3.56	3.67	3.54
Heating	Capacity*1	kW	56.5	63.0	69.0	75.0	82.5
		kBtu/h	192.7	214.9	235.4	255.9	281.4
	Power Input	kW	13.45	15.25	16.90	18.16	20.89
	COP	kW/kW	4.20	4.13	4.08	4.13	3.95
Ventilation	Air Flow Rate	m³/min	292	258	317	317	317
	Fan Quantity	pcs	1	1	2	2	2
	External Static Pressure	Pa	110	110	110	110	110
Sound	Sound Pressure Level*2	dB(A)	61	62	62	62	62
Compressor	Type	—	Enhanced Vapor Injection Scroll Compressor				
	Quantity	pcs	1	1	1	2	2
Refrigerant	Type	—	R410A				
	Pre-charged Amount	kg	7.6	9.4	9.7	13.1	13.1
Weight	Net	kg	245	267	304	368	368
	Gross	kg	269	289	320	399	399
Dimensions	External (H×W×D)	mm	1800×940×825			1800×1390×825	
	Packing(H×W×D)	mm	1960×1000×885			1960×1450×885	
Cabinet Color		—	Gray + White				
Ref. Piping	Gas	mm	Φ28.60	Φ28.60	Φ28.60	Φ28.60	Φ31.75
		inch	1-1/8	1-1/8	1-1/8	1-1/8	1-1/4
	Liquid	mm	Φ15.88	Φ15.88	Φ15.88	Φ15.88	Φ19.05
		inch	5/8	5/8	5/8	5/8	3/4
Connectable Indoor Units	Quantity	pcs	36	40	44	48	52
	Connection Ratio*3	—	30%~200%	30%~200%	30%~200%	30%~200%	30%~200%
Piping Design	Height Difference Between ODU and IDU		m	110	110	110	110
	Height Difference Between IDUs		m	40	40	40	40
	Max. Piping Length	Actual	m	220	220	220	220
		Equivalent	m	260	260	260	260
Operation Range	Cooling	℃	~15℃ DB ~55℃ DB	~15℃ DB ~55℃ DB	~15℃ DB ~55℃ DB	~15℃ DB ~55℃ DB	~15℃ DB ~55℃ DB
	Heating	℃	~30℃ WB ~30℃ DB	~30℃ WB ~30℃ DB	~30℃ WB ~30℃ DB	~30℃ WB ~30℃ DB	~30℃ WB ~30℃ DB

Notes:
1. Rated cooling capacity and rated heating capacity are tested in the following conditions:
Cooling Conditions: indoor air inlet temperature: 27℃ DB 19℃ WB, outdoor air nlet temperature: 35℃ DB, pipe length: 7.5m, pipe height difference: 0m.
Heating Conditions: indoor air inlet temperature: 20℃ DB, outdoor air nlet temperature: 7℃ DB 6℃ WB, pipe Length: 7.5m, pipe height difference: 0m.
2. The above noise values are measured in the anechoic chamber without reflected echo, therefore the impact of the reflected echo must be included at the scene.
Measurement point: 1m from the service cover surface and 1.5m from the floor level.
3. When the connection ratio is lower than 50% or higher than 130%, please consult our local technical engineers.

Hi-FLEXi S5 Series



HP				28HP	30HP	32HP	34HP
Model				AVWT-272HKF5	AVWT-290HKF5	AVWT-307HKF5	AVWT-324HKF5
Modules				AVWT-272HKF5	AVWT-290HKF5	AVWT-307HKF5	AVWT-324HKF5
				/	/	/	/
				/	/	/	/
				/	/	/	/
Power Supply				380-415V 3~ 50Hz/60Hz			
Cooling	Capacity*1	kW	78.5	85.0	90.0	95.4	
		kBtu/h	267.8	290.0	307.0	325.5	
	Power Input	kW	22.95	25.37	27.69	29.81	
	EER	kW/kW	3.42	3.35	3.25	3.20	
Heating	Capacity*1	kW	87.5	95.0	100.0	106.5	
		kBtu/h	298.5	324.1	341.2	363.3	
	Power Input	kW	22.85	25.61	27.78	30.08	
	COP	kW/kW	3.83	3.71	3.60	3.54	
Ventilation	Air Flow Rate	m³/min	400	400	408	408	
	Fan Quantity	pcs	2	2	2	2	
	External Static Pressure	Pa	110	110	110	110	
Sound	Sound Pressure Level*2	dB(A)	63	63	64	66	
Compressor	Type	—	Enhanced Vapor Injection Scroll Compressor				
	Quantity	pcs	2	2	2	2	
Refrigerant	Type	—	R410A				
	Pre-charged Amount	kg	11.5	11.5	16.1	16.1	
Weight	Net	kg	406	406	482	482	
	Gross	kg	430	430	519	519	
Dimensions	External (H × W × D)	mm	1800 × 1600 × 825			1800 × 1880 × 825	
	Packing(H × W × D)	mm	1960 × 1660 × 885			1960 × 1940 × 885	
Cabinet Color		—	Gray + White				
Ref. Piping	Gas	mm	Φ31.75	Φ31.75	Φ31.75	Φ31.75	
		inch	1-1/4	1-1/4	1-1/4	1-1/4	
	Liquid	mm	Φ19.05	Φ19.05	Φ19.05	Φ19.05	
		inch	3/4	3/4	3/4	3/4	
Connectable Indoor Units	Quantity	pcs	56	60	64	68	
	Connection Ratio*3	—	30%~200%	30%~200%	30%~200%	30%~200%	
Piping Design	Height Difference Between ODU and IDU	m	110	110	110	110	
		m	40	40	40	40	
	Max. Piping Length	Actual m	220	220	220	220	
		Equivalent m	260	260	260	260	
Operation Range	Cooling	℃	-15℃ DB ~55℃ DB	-15℃ DB ~55℃ DB	-15℃ DB ~55℃ DB	-15℃ DB ~55℃ DB	
	Heating	℃	-30℃ WB ~30℃ DB	-30℃ WB ~30℃ DB	-30℃ WB ~30℃ DB	-30℃ WB ~30℃ DB	

- Notes:
- Rated cooling capacity and rated heating capacity are tested in the following conditions:
Cooling Conditions: indoor air inlet temperature: 27℃ DB 19℃ WB, outdoor air nlet temperature: 35℃ DB, pipe length: 7.5m, pipe height difference: 0m.
Heating Conditions: indoor air inlet temperature: 20℃ DB, outdoor air nlet temperature: 7℃ DB 6℃ WB, pipe Length: 7.5m, pipe height difference: 0m.
 - The above noise values are measured in the anechoic chamber without reflected echo, therefore the impact of the reflected echo must be included at the scene.
Measurement point: 1m from the service cover surface and 1.5m from the floor level.
 - When the connection ratio is lower than 50% or higher than 130%, please consult our local technical engineers.

Hi-FLEXi S5 Series



HP			36HP	38HP	40HP	42HP
Model			AVWT-343HKF5	AVWT-365HKF5	AVWT-386HKF5	AVWT-404HKF5
			AVWT-343HKF5	AVWT-365HKF5	AVWT-386HKF5	AVWT-404HKF5
Modules			/	/	/	/
			/	/	/	/
			/	/	/	/
			/	/	/	/
Power Supply			380-415V 3~ 50Hz/60Hz			
Cooling	Capacity*1	kW	101.0	106.5	112.0	117.5
		kBtu/h	344.6	363.3	382.1	400.9
	Power Input	kW	31.86	34.24	36.72	39.17
	EER	kW/kW	3.17	3.11	3.05	3.00
Heating	Capacity*1	kW	113.0	119.5	125.5	132.0
		kBtu/h	385.5	407.7	428.2	450.3
	Power Input	kW	32.29	34.94	37.35	41.77
	COP	kW/kW	3.50	3.42	3.36	3.16
Ventilation	Air Flow Rate	m³/min	467	467	467	467
	Fan Quantity	pcs	2	2	2	2
	External Static Pressure	Pa	110	110	110	110
Sound	Sound Pressure Level*2	dB(A)	66	67	67	67
Compressor	Type	–	Enhanced Vapor Injection Scroll Compressor			
	Quantity	pcs	2	2	2	2
Refrigerant	Type	–	R410A			
	Pre-charged Amount	kg	16.1	16.1	16.1	16.1
Weight	Net	kg	482	493	493	493
	Gross	kg	519	530	530	530
Dimensions	External (H × W × D)	mm	1800 × 1880 × 825			
	Packing(H × W × D)	mm	1960 × 1940 × 885			
Cabinet Color		–	Gray + White			
Ref. Piping	Gas	mm	Φ38.1	Φ38.1	Φ38.1	Φ38.1
		inch	1-1/2	1-1/2	1-1/2	1-1/2
	Liquid	mm	Φ19.05	Φ19.05	Φ19.05	Φ19.05
		inch	3/4	3/4	3/4	3/4
Connectable Indoor Units	Quantity	pcs	72	76	80	84
	Connection Ratio*3	–	30%~200%	30%~200%	30%~200%	30%~200%
Piping Design	Height Difference Between ODU and IDU	m	110	110	110	110
		m	40	40	40	40
	Max. Piping Length	Actual m	220	220	220	220
		Equivalent m	260	260	260	260
Operation Range	Cooling	℃	-15℃ DB ~55℃ DB	-15℃ DB ~55℃ DB	-15℃ DB ~55℃ DB	-15℃ DB ~55℃ DB
	Heating	℃	-30℃ WB ~30℃ DB	-30℃ WB ~30℃ DB	-30℃ WB ~30℃ DB	-30℃ WB ~30℃ DB

- Notes:
- Rated cooling capacity and rated heating capacity are tested in the following conditions:
Cooling Conditions: indoor air inlet temperature: 27℃ DB 19℃ WB, outdoor air nlet temperature: 35℃ DB, pipe length: 7.5m, pipe height difference: 0m.
Heating Conditions: indoor air inlet temperature: 20℃ DB, outdoor air nlet temperature: 7℃ DB 6℃ WB, pipe Length: 7.5m, pipe height difference: 0m.
 - The above noise values are measured in the anechoic chamber without reflected echo, therefore the impact of the reflected echo must be included at the scene.
Measurement point: 1m from the service cover surface and 1.5m from the floor level.
 - When the connection ratio is lower than 50% or higher than 130%, please consult our local technical engineers.

Hi-FLEXi S5 Series



HP			44HP	46HP	48HP	50HP	52HP
Model			AVWT-420HKF5	AVWT-440HKF5	AVWT-462HKF5	AVWT-484HKF5	AVWT-502HKF5
Modules			AVWT-170HKF5	AVWT-190HKF5	AVWT-212HKF5	AVWT-272HKF5	AVWT-290HKF5
			AVWT-250HKF5	AVWT-250HKF5	AVWT-250HKF5	AVWT-212HKF5	AVWT-212HKF5
			/	/	/	/	/
			/	/	/	/	/
Power Supply			380~415V 3~ 50Hz/60Hz				
Cooling	Capacity*1	kW	123.9	129.5	135.0	140.0	146.5
		kBtu/h	422.7	441.8	460.6	477.6	499.8
	Power Input	kW	33.55	35.46	38.04	40.23	42.65
	EER	kW/kW	3.69	3.65	3.55	3.48	3.44
Heating	Capacity*1	kW	139.0	145.5	151.5	156.5	164.0
		kBtu/h	474.2	496.4	516.9	533.9	559.5
	Power Input	kW	34.34	36.14	37.79	39.75	42.51
	COP	kW/kW	4.05	4.03	4.01	3.94	3.86
Ventilation	Air Flow Rate	m³/min	609	575	634	717	717
	Fan Quantity	pcs	3	3	4	4	4
	External Static Pressure	Pa	110	110	110	110	110
Sound	Sound Pressure Level*2	dB(A)	65	65	65	66	66
Compressor	Type	—	Enhanced Vapor Injection Scroll Compressor				
	Quantity	pcs	3	3	3	3	3
Refrigerant	Type	—	R410A				
	Pre-charged Amount	kg	7.6+13.1	9.4+13.1	9.7+13.1	9.7+11.5	9.7+11.5
Weight	Net	kg	245+368	267+368	304+368	304+406	304+406
	Gross	kg	269+399	289+399	320+399	320+430	320+430
Dimensions	External (H × W × D)	mm	1800 × (1390+940) × 825		1800 × (1390+1390) × 825	1800 × (1600+1390) × 825	
	Packing(H × W × D)	mm	1960 × (1450+1000) × 885		1960 × (1450+1450) × 885	1960 × (1660+1450) × 885	
Cabinet Color		—	Gray + White				
Ref. Piping	Gas	mm	Φ38.1	Φ38.1	Φ41.3	Φ41.3	Φ41.3
		inch	1-1/2	1-1/2	1-5/8	1-5/8	1-5/8
	Liquid	mm	Φ19.05	Φ19.05	Φ22.2	Φ22.2	Φ22.2
		inch	3/4	3/4	7/8	7/8	7/8
Connectable Indoor Units	Quantity	pcs	88	93	97	101	105
	Connection Ratio*3	—	30%~150%	30%~150%	30%~150%	30%~150%	30%~150%
Piping Design	Height Difference Between ODU and IDU		m	110	110	110	110
	Height Difference Between IDUs		m	40	40	40	40
	Max. Piping Length	Actual	m	220	220	220	220
		Equivalent	m	260	260	260	260
Operation Range	Cooling	℃	~15℃ DB ~55℃ DB	~15℃ DB ~55℃ DB	~15℃ DB ~55℃ DB	~15℃ DB ~55℃ DB	~15℃ DB ~55℃ DB
	Heating	℃	~30℃ WB ~30℃ DB	~30℃ WB ~30℃ DB	~30℃ WB ~30℃ DB	~30℃ WB ~30℃ DB	~30℃ WB ~30℃ DB

- Notes:
- Rated cooling capacity and rated heating capacity are tested in the following conditions:
Cooling Conditions: indoor air inlet temperature: 27℃ DB 19℃ WB, outdoor air nlet temperature: 35℃ DB, pipe length: 7.5m, pipe height difference: 0m.
Heating Conditions: indoor air inlet temperature: 20℃ DB, outdoor air nlet temperature: 7℃ DB 6℃ WB, pipe Length: 7.5m, pipe height difference: 0m.
 - The above noise values are measured in the anechoic chamber without reflected echo, therefore the impact of the reflected echo must be included at the scene.
Measurement point: 1m from the service cover surface and 1.5m from the floor level.
 - When the connection ratio is lower than 50% or higher than 130%, please consult our local technical engineers.

Hi-FLEXi S5 Series



HP				54HP	56HP	58HP	60HP	62HP
Model				AVWT-522HKF5	AVWT-540HKF5	AVWT-562HKF5	AVWT-580HKF5	AVWT-597HKF5
Modules				AVWT-272HKF5	AVWT-290HKF5	AVWT-290HKF5	AVWT-290HKF5	AVWT-307HKF5
				AVWT-250HKF5	AVWT-250HKF5	AVWT-272HKF5	AVWT-290HKF5	AVWT-290HKF5
				/	/	/	/	/
				/	/	/	/	/
Power Supply				380-415V 3~ 50Hz/60Hz				
Cooling	Capacity*1	kW	152.0	158.5	163.5	170.0	175.0	
		kBtu/h	518.6	540.8	557.8	580.0	597.1	
	Power Input	kW	43.72	46.14	48.33	50.75	53.07	
	EER	kW/kW	3.48	3.44	3.38	3.35	3.30	
Heating	Capacity*1	kW	170.0	177.5	182.5	190.0	195.0	
		kBtu/h	580.0	605.6	622.6	648.2	665.3	
	Power Input	kW	43.73	46.49	48.45	51.21	53.38	
	COP	kW/kW	3.89	3.82	3.77	3.71	3.65	
Ventilation	Air Flow Rate	m³/min	717	717	800	800	808	
	Fan Quantity	pcs	4	4	4	4	4	
	External Static Pressure	Pa	110	110	110	110	110	
Sound	Sound Pressure Level*2	dB(A)	66	66	66	66	67	
Compressor	Type	—	Enhanced Vapor Injection Scroll Compressor					
	Quantity	pcs	4	4	4	4	4	
Refrigerant	Type	—	R410A					
	Pre-charged Amount	kg	13.1+11.5	13.1+11.5	11.5+11.5	11.5+11.5	16.1+11.5	
Weight	Net	kg	406+368	406+368	406+406	406+406	406+482	
	Gross	kg	430+399	430+399	430+430	430+430	430+519	
Dimensions	External (H × W × D)	mm	1800 × (1600+1390) × 825			1800 × (1600+1600) × 825		1800 × (1880+1600) × 825
	Packing(H × W × D)	mm	1960 × (1660+1450) × 885			1960 × (1660+1660) × 885		1960 × (1940+1660) × 885
Cabinet Color		—	Gray + White					
Ref. Piping	Gas	mm	Φ41.3	Φ41.3	Φ44.5	Φ44.5	Φ44.5	
		inch	1-5/8	1-5/8	1-3/4	1-3/4	1-3/4	
	Liquid	mm	Φ22.2	Φ22.2	Φ22.2	Φ22.2	Φ22.2	
		inch	7/8	7/8	7/8	7/8	7/8	
Connectable Indoor Units	Quantity	pcs	109	113	117	121	125	
	Connection Ratio*3	—	30%-150%	30%-150%	30%-150%	30%-150%	30%-150%	
Piping Design	Height Difference Between ODU and IDU	m	110	110	110	110	110	
	Height Difference Between IDUs	m	40	40	40	40	40	
	Max. Piping Length	Actual m	220	220	220	220	220	
		Equivalent m	260	260	260	260	260	
Operation Range	Cooling	℃	-15℃ DB ~55℃ DB	-15℃ DB ~55℃ DB	-15℃ DB ~55℃ DB	-15℃ DB ~55℃ DB	-15℃ DB ~55℃ DB	
	Heating	℃	-30℃ WB ~30℃ DB	-30℃ WB ~30℃ DB	-30℃ WB ~30℃ DB	-30℃ WB ~30℃ DB	-30℃ WB ~30℃ DB	

- Notes:
- Rated cooling capacity and rated heating capacity are tested in the following conditions:
Cooling Conditions: indoor air inlet temperature: 27℃ DB 19℃ WB, outdoor air nlet temperature: 35℃ DB, pipe length: 7.5m, pipe height difference: 0m.
Heating Conditions: indoor air inlet temperature: 20℃ DB, outdoor air nlet temperature: 7℃ DB 6℃ WB, pipe Length: 7.5m, pipe height difference: 0m.
 - The above noise values are measured in the anechoic chamber without reflected echo, therefore the impact of the reflected echo must be included at the scene.
Measurement point: 1m from the service cover surface and 1.5m from the floor level.
 - When the connection ratio is lower than 50% or higher than 130%, please consult our local technical engineers.

Hi-FLEXi S5 Series



HP			64HP	66HP	68HP	70HP	72HP
Model			AVWT-614HKF5	AVWT-633HKF5	AVWT-655HKF5	AVWT-676HKF5	AVWT-686HKF5
Modules			AVWT-324HKF5	AVWT-343HKF5	AVWT-365HKF5	AVWT-386HKF5	AVWT-343HKF5
			AVWT-290HKF5	AVWT-290HKF5	AVWT-290HKF5	AVWT-290HKF5	AVWT-343HKF5
			/	/	/	/	/
			/	/	/	/	/
Power Supply			380~415V 3~ 50Hz/60Hz				
Cooling	Capacity*1	kW	180.4	186.0	191.5	197.0	202.0
		kBtu/h	615.5	634.6	653.3	672.1	689.2
	Power Input	kW	55.19	57.23	59.62	62.09	63.72
	EER	kW/kW	3.27	3.25	3.21	3.17	3.17
Heating	Capacity*1	kW	201.5	208.0	214.5	220.5	226.0
		kBtu/h	687.5	709.6	731.8	752.3	771.1
	Power Input	kW	55.69	57.89	60.55	62.96	64.57
	COP	kW/kW	3.62	3.59	3.54	3.50	3.50
Ventilation	Air Flow Rate	m³/min	808	867	867	867	934
	Fan Quantity	pcs	4	4	4	4	4
	External Static Pressure	Pa	110	110	110	110	110
Sound	Sound Pressure Level*2	dB(A)	68	68	68	68	69
Compressor	Type	—	Enhanced Vapor Injection Scroll Compressor				
	Quantity	pcs	4	4	4	4	4
Refrigerant	Type	—	R410A				
	Pre-charged Amount	kg	16.1+11.5	16.1+11.5	16.1+11.5	16.1+11.5	16.1+16.1
Weight	Net	kg	406+482	406+482	406+493	406+493	482+482
	Gross	kg	430+519	430+519	430+530	430+530	519+519
Dimensions	External (H × W × D)	mm	1800 × (1880+1600) × 825				1800 × (1880+1880) × 825
	Packing(H × W × D)	mm	1960 × (1940+1660) × 885				1960 × (1940+1940) × 885
Cabinet Color		—	Gray + White				
Ref. Piping	Gas	mm	φ44.5	φ44.5	φ44.5	φ44.5	φ44.5
		inch	1-3/4	1-3/4	1-3/4	1-3/4	1-3/4
	Liquid	mm	φ22.2	φ22.2	φ22.2	φ22.2	φ22.2
		inch	7/8	7/8	7/8	7/8	7/8
Connectable Indoor Units	Quantity	pcs	128	128	128	128	128
	Connection Ratio*3	—	30%~150%	30%~150%	30%~150%	30%~150%	30%~150%
Piping Design	Height Difference Between ODU and IDU	m	110	110	110	110	110
	Height Difference Between IDUs	m	40	40	40	40	40
	Max. Piping Length	Actual	220	220	220	220	220
		Equivalent	m	260	260	260	260
Operation Range	Cooling	℃	~15℃ DB ~55℃ DB	~15℃ DB ~55℃ DB	~15℃ DB ~55℃ DB	~15℃ DB ~55℃ DB	~15℃ DB ~55℃ DB
	Heating	℃	~30℃ WB ~30℃ DB	~30℃ WB ~30℃ DB	~30℃ WB ~30℃ DB	~30℃ WB ~30℃ DB	~30℃ WB ~30℃ DB

- Notes:
- Rated cooling capacity and rated heating capacity are tested in the following conditions:
Cooling Conditions: indoor air inlet temperature: 27℃ DB 19℃ WB, outdoor air nlet temperature: 35℃ DB, pipe length: 7.5m, pipe height difference: 0m.
Heating Conditions: indoor air inlet temperature: 20℃ DB, outdoor air nlet temperature: 7℃ DB 6℃ WB, pipe Length: 7.5m, pipe height difference: 0m.
 - The above noise values are measured in the anechoic chamber without reflected echo, therefore the impact of the reflected echo must be included at the scene.
Measurement point: 1m from the service cover surface and 1.5m from the floor level.
 - When the connection ratio is lower than 50% or higher than 130%, please consult our local technical engineers.

Hi-FLEXi S5 Series



HP			74HP	76HP	78HP	80HP
Model			AVWT-708HKF5	AVWT-729HKF5	AVWT-747HKF5	AVWT-772HKF5
Modules			AVWT-365HKF5	AVWT-386HKF5	AVWT-404HKF5	AVWT-386HKF5
			AVWT-343HKF5	AVWT-343HKF5	AVWT-343HKF5	AVWT-386HKF5
			/	/	/	/
			/	/	/	/
Power Supply			380-415V 3~ 50Hz/60Hz			
Cooling	Capacity*1	kW	207.5	213.0	218.5	224.0
		kBtu/h	707.9	726.7	745.5	764.2
	Power Input	kW	66.11	68.58	71.03	73.44
	EER	kW/kW	3.14	3.11	3.08	3.05
Heating	Capacity*1	kW	232.5	238.5	245.0	251.0
		kBtu/h	793.2	813.7	835.9	856.4
	Power Input	kW	67.23	69.64	74.06	74.70
	COP	kW/kW	3.46	3.42	3.31	3.36
Ventilation	Air Flow Rate	m³/min	934	934	934	934
	Fan Quantity	pcs	4	4	4	4
	External Static Pressure	Pa	110	110	110	110
Sound	Sound Pressure Level*2	dB(A)	70	70	70	70
Compressor	Type	—	Enhanced Vapor Injection Scroll Compressor			
	Quantity	pcs	4	4	4	4
Refrigerant	Type	—	R410A			
	Pre-charged Amount	kg	16.1+16.1	16.1+16.1	16.1+16.1	16.1+16.1
Weight	Net	kg	493+482	493+482	493+482	493+493
	Gross	kg	519+530	530+519	530+519	530+530
Dimensions	External (H × W × D)	mm	1800 × (1880+1880) × 825			
	Packing(H × W × D)	mm	1960 × (1940+1940) × 885			
Cabinet Color	—		Gray + White			
Ref. Piping	Gas	mm	Φ44.5	Φ44.5	Φ44.5	Φ44.5
		inch	1-3/4	1-3/4	1-3/4	1-3/4
	Liquid	mm	Φ22.2	Φ22.2	Φ22.2	Φ22.2
		inch	7/8	7/8	7/8	7/8
Connectable Indoor Units	Quantity	pcs	128	128	128	128
	Connection Ratio*3	—	30%~150%	30%~150%	30%~150%	30%~150%
Piping Design	Height Difference Between ODU and IDU		m	110	110	110
	Height Difference Between IDUs		m	40	40	40
	Max. Piping Length	Actual	m	220	220	220
		Equivalent	m	260	260	260
Operation Range	Cooling	℃	-15℃ DB ~55℃ DB	-15℃ DB ~55℃ DB	-15℃ DB ~55℃ DB	-15℃ DB ~55℃ DB
	Heating	℃	-30℃ WB ~30℃ DB	-30℃ WB ~30℃ DB	-30℃ WB ~30℃ DB	-30℃ WB ~30℃ DB

- Notes:
- Rated cooling capacity and rated heating capacity are tested in the following conditions:
Cooling Conditions: indoor air inlet temperature: 27℃ DB 19℃ WB, outdoor air nlet temperature: 35℃ DB, pipe length: 7.5m, pipe height difference: 0m.
Heating Conditions: indoor air inlet temperature: 20℃ DB, outdoor air nlet temperature: 7℃ DB 6℃ WB, pipe Length: 7.5m, pipe height difference: 0m.
 - The above noise values are measured in the anechoic chamber without reflected echo, therefore the impact of the reflected echo must be included at the scene.
Measurement point: 1m from the service cover surface and 1.5m from the floor level.
 - When the connection ratio is lower than 50% or higher than 130%, please consult our local technical engineers.

Hi-FLEXi S5 Series



HP			82HP	84HP	86HP	88HP	90HP
Model			AVWT-792HKF5	AVWT-812HKF5	AVWT-830HKF5	AVWT-852HKF5	AVWT-870HKF5
Modules			AVWT-290HKF5	AVWT-290HKF5	AVWT-290HKF5	AVWT-290HKF5	AVWT-290HKF5
			AVWT-290HKF5	AVWT-272HKF5	AVWT-290HKF5	AVWT-290HKF5	AVWT-290HKF5
			AVWT-212HKF5	AVWT-250HKF5	AVWT-250HKF5	AVWT-272HKF5	AVWT-290HKF5
			/	/	/	/	/
Power Supply			380-415V 3~ 50Hz/60Hz				
Cooling	Capacity*1	kW	231.5	237.0	243.5	248.5	255.0
		kBtu/h	789.8	808.6	830.8	847.8	870.0
	Power Input	kW	68.02	69.09	71.51	73.70	76.12
	EER	kW/kW	3.40	3.43	3.41	3.37	3.35
Heating	Capacity*1	kW	259.0	265.0	272.5	277.5	285.0
		kBtu/h	883.7	904.1	929.7	946.8	972.4
	Power Input	kW	68.11	69.34	72.10	74.06	76.82
	COP	kW/kW	3.80	3.82	3.78	3.75	3.71
Ventilation	Air Flow Rate	m³/min	1117	1117	1117	1200	1200
	Fan Quantity	pcs	6	6	6	6	6
	External Static Pressure	Pa	110	110	110	110	110
Sound	Sound Pressure Level*2	dB(A)	67	67	67	68	68
Compressor	Type	—	Enhanced Vapor Injection Scroll Compressor				
	Quantity	pcs	5	6	6	6	6
Refrigerant	Type	—	R410A				
	Pre-charged Amount	kg	11.5+11.5+9.7	11.5+11.5+13.1	11.5+11.5+13.1	11.5+11.5+11.5	11.5+11.5+11.5
Weight	Net	kg	406+406+304	406+406+368	406+406+368	406+406+406	406+406+406
	Gross	kg	430+430+320	430+430+399	430+430+399	430+430+430	430+430+430
Dimensions	External (H × W × D)	mm	1800 × (1600+1600+1390) × 825			1800 × (1600+1600+1600) × 825	
	Packing(H × W × D)	mm	1960 × (1660+1660+1450) × 885			1960 × (1660+1660+1660) × 885	
Cabinet Color		—	Gray + White				
Ref. Piping	Gas	mm	φ44.5	φ50.8	φ50.8	φ50.8	φ50.8
		inch	1-3/4	2	2	2	2
	Liquid	mm	φ22.2	φ25.4	φ25.4	φ25.4	φ25.4
		inch	7/8	1	1	1	1
Connectable Indoor Units	Quantity	pcs	128	128	128	128	128
	Connection Ratio*3	—	30%~130%	30%~130%	30%~130%	30%~130%	30%~130%
Piping Design	Height Difference Between ODU and IDU	m	110	110	110	110	110
	Height Difference Between IDUs	m	40	40	40	40	40
	Max. Piping Length	Actual m	220	220	220	220	220
		Equivalent m	260	260	260	260	260
Operation Range	Cooling	℃	-15℃ DB ~55℃ DB	-15℃ DB ~55℃ DB	-15℃ DB ~55℃ DB	-15℃ DB ~55℃ DB	-15℃ DB ~55℃ DB
	Heating	℃	-30℃ WB ~30℃ DB	-30℃ WB ~30℃ DB	-30℃ WB ~30℃ DB	-30℃ WB ~30℃ DB	-30℃ WB ~30℃ DB

Notes:

1. Rated cooling capacity and rated heating capacity are tested in the following conditions:
Cooling Conditions: indoor air inlet temperature: 27℃ DB 19℃ WB, outdoor air nlet temperature: 35℃ DB, pipe length: 7.5m, pipe height difference: 0m.
Heating Conditions: indoor air inlet temperature: 20℃ DB, outdoor air nlet temperature: 7℃ DB 6℃ WB, pipe Length: 7.5m, pipe height difference: 0m.

2. The above noise values are measured in the anechoic chamber without reflected echo, therefore the impact of the reflected echo must be included at the scene.
Measurement point: 1m from the service cover surface and 1.5m from the floor level.

3. When the connection ratio is lower than 50% or higher than 130%, please consult our local technical engineers.

Hi-FLEXi S5 Series



HP			92HP	94HP	96HP	98HP	100HP	
Model			AVWT-887HKF5	AVWT-905HKF5	AVWT-923HKF5	AVWT-945HKF5	AVWT-966HKF5	
Modules			AVWT-343HKF5	AVWT-343HKF5	AVWT-343HKF5	AVWT-365HKF5	AVWT-386HKF5	
			AVWT-272HKF5	AVWT-290HKF5	AVWT-290HKF5	AVWT-290HKF5	AVWT-290HKF5	
			AVWT-272HKF5	AVWT-272HKF5	AVWT-290HKF5	AVWT-290HKF5	AVWT-290HKF5	
			/	/	/	/	/	
Power Supply			380~415V 3~ 50Hz/60Hz					
Cooling	Capacity*1	kW	258.0	264.5	271.0	276.5	282.0	
		kBtu/h	880.2	902.4	924.6	943.4	962.1	
	Power Input	kW	77.77	80.19	82.61	84.99	87.47	
	EER	kW/kW	3.32	3.30	3.28	3.25	3.22	
Heating	Capacity*1	kW	288.0	295.5	303.0	309.5	315.5	
		kBtu/h	982.6	1008.2	1033.8	1056.0	1076.4	
	Power Input	kW	77.98	80.74	83.50	86.15	88.56	
	COP	kW/kW	3.69	3.66	3.63	3.59	3.56	
Ventilation	Air Flow Rate	m³/min	1267	1267	1267	1267	1267	
	Fan Quantity	pcs	6	6	6	6	6	
	External Static Pressure	Pa	110	110	110	110	110	
Sound	Sound Pressure Level*2	dB(A)	69	69	69	70	70	
Compressor	Type	—	Enhanced Vapor Injection Scroll Compressor					
	Quantity	pcs	6	6	6	6	6	
Refrigerant	Type	—	R410A					
	Pre-charged Amount	kg	16.1+11.5+11.5	16.1+11.5+11.5	16.1+11.5+11.5	16.1+11.5+11.5	16.1+11.5+11.5	
Weight	Net	kg	482+406+406	482+406+406	482+406+406	493+406+406	493+406+406	
	Gross	kg	519+430+430	519+430+430	519+430+430	530+430+430	530+430+430	
Dimensions	External (H×W×D)	mm	1800×(1880+1600+1600)×825					
	Packing(H×W×D)	mm	1960×(1940+1660+1660)×885					
Cabinet Color		—	Gray + White					
Ref. Piping	Gas	mm	Φ50.8	Φ50.8	Φ50.8	Φ50.8	Φ50.8	
		inch	2	2	2	2	2	
	Liquid	mm	Φ25.4	Φ25.4	Φ25.4	Φ25.4	Φ25.4	
		inch	1	1	1	1	1	
Connectable Indoor Units	Quantity	pcs	128	128	128	128	128	
	Connection Ratio*3	—	30%~130%	30%~130%	30%~130%	30%~130%	30%~130%	
Piping Design	Height Difference Between ODU and IDU	m	110	110	110	110	110	
	Height Difference Between IDUs	m	40	40	40	40	40	
	Max. Piping Length	Actual	m	220	220	220	220	220
		Equivalent	m	260	260	260	260	260
Operation Range	Cooling	℃	~15℃ DB ~55℃ DB	~15℃ DB ~55℃ DB	~15℃ DB ~55℃ DB	~15℃ DB ~55℃ DB	~15℃ DB ~55℃ DB	
	Heating	℃	~30℃ WB ~30℃ DB	~30℃ WB ~30℃ DB	~30℃ WB ~30℃ DB	~30℃ WB ~30℃ DB	~30℃ WB ~30℃ DB	

Notes:

1. Rated cooling capacity and rated heating capacity are tested in the following conditions:
Cooling Conditions: indoor air inlet temperature: 27℃ DB 19℃ WB, outdoor air nlet temperature: 35℃ DB, pipe length: 7.5m, pipe height difference: 0m.
Heating Conditions: indoor air inlet temperature: 20℃ DB, outdoor air nlet temperature: 7℃ DB 6℃ WB, pipe Length: 7.5m, pipe height difference: 0m.

2. The above noise values are measured in the anechoic chamber without reflected echo, therefore the impact of the reflected echo must be included at the scene.
Measurement point: 1m from the service cover surface and 1.5m from the floor level.

3. When the connection ratio is lower than 50% or higher than 130%, please consult our local technical engineers.

Hi-FLEXi S5 Series



HP			102HP	104HP	106HP	108HP	110HP
Model			AVWT-976HKF5	AVWT-1001HKF5	AVWT-1019HKF5	AVWT-1037HKF5	AVWT-1062HKF5
Modules			AVWT-343HKF5	AVWT-386HKF5	AVWT-386HKF5	AVWT-404HKF5	AVWT-386HKF5
			AVWT-343HKF5	AVWT-343HKF5	AVWT-343HKF5	AVWT-343HKF5	AVWT-386HKF5
			AVWT-290HKF5	AVWT-272HKF5	AVWT-290HKF5	AVWT-290HKF5	AVWT-290HKF5
			/	/	/	/	/
Power Supply			380-415V 3~ 50Hz/60Hz				
Cooling	Capacity*1	kW	287.0	291.5	298.0	303.5	309.0
		kBtu/h	979.2	994.5	1016.7	1035.5	1054.3
	Power Input	kW	89.10	91.54	93.96	96.40	98.82
	EER	kW/kW	3.22	3.18	3.17	3.15	3.13
Heating	Capacity*1	kW	321.0	326.0	333.5	340.0	346.0
		kBtu/h	1095.2	1112.3	1137.9	1160.0	1180.5
	Power Input	kW	90.18	92.48	95.24	99.66	100.31
	COP	kW/kW	3.56	3.52	3.50	3.41	3.45
Ventilation	Air Flow Rate	m³/min	1334	1334	1334	1334	1334
	Fan Quantity	pcs	6	6	6	6	6
	External Static Pressure	Pa	110	110	110	110	110
Sound	Sound Pressure Level*2	dB(A)	70	70	70	70	71
Compressor	Type	—	Enhanced Vapor Injection Scroll Compressor				
	Quantity	pcs	6	6	6	6	6
Refrigerant	Type	—	R410A				
	Pre-charged Amount	kg	16.1+16.1+11.5	16.1+16.1+11.5	16.1+16.1+11.5	16.1+16.1+11.5	16.1+16.1+11.5
Weight	Net	kg	482+482+406	493+482+406	493+482+406	493+482+406	493+493+406
	Gross	kg	519+519+430	530+519+430	530+519+430	530+519+430	530+530+430
Dimensions	External (H × W × D)	mm	1800 × (1880+1880+1600) × 825				
	Packing(H × W × D)	mm	1960 × (1940+1940+1660) × 885				
Cabinet Color		—	Gray + White				
Ref. Piping	Gas	mm	φ50.8	φ50.8	φ50.8	φ50.8	φ50.8
		inch	2	2	2	2	2
	Liquid	mm	φ25.4	φ25.4	φ25.4	φ25.4	φ25.4
		inch	1	1	1	1	1
Connectable Indoor Units	Quantity	pcs	128	128	128	128	128
	Connection Ratio*3	—	30%~130%	30%~130%	30%~130%	30%~130%	30%~130%
Piping Design	Height Difference Between ODU and IDU	m	110	110	110	110	110
	Height Difference Between IDUs	m	40	40	40	40	40
	Max. Piping Length	Actual m	220	220	220	220	220
		Equivalent m	260	260	260	260	260
Operation Range	Cooling	℃	~15℃ DB ~55℃ DB	~15℃ DB ~55℃ DB	~15℃ DB ~55℃ DB	~15℃ DB ~55℃ DB	~15℃ DB ~55℃ DB
	Heating	℃	~30℃ WB ~30℃ DB	~30℃ WB ~30℃ DB	~30℃ WB ~30℃ DB	~30℃ WB ~30℃ DB	~30℃ WB ~30℃ DB

- Notes:
- Rated cooling capacity and rated heating capacity are tested in the following conditions:
Cooling Conditions: indoor air inlet temperature: 27℃ DB 19℃ WB, outdoor air nlet temperature: 35℃ DB, pipe length: 7.5m, pipe height difference: 0m.
Heating Conditions: indoor air inlet temperature: 20℃ DB, outdoor air nlet temperature: 7℃ DB 6℃ WB, pipe Length: 7.5m, pipe height difference: 0m.
 - The above noise values are measured in the anechoic chamber without reflected echo, therefore the impact of the reflected echo must be included at the scene.
Measurement point: 1m from the service cover surface and 1.5m from the floor level.
 - When the connection ratio is lower than 50% or higher than 130%, please consult our local technical engineers.

Hi-FLEXi S5 Series




HP			112HP	114HP	116HP	118HP	120HP
Model			AVWT-1072HKF5	AVWT-1090HKF5	AVWT-1115HKF5	AVWT-1137HKF5	AVWT-1158HKF5
Modules			AVWT-386HKF5	AVWT-404HKF5	AVWT-386HKF5	AVWT-386HKF5	AVWT-386HKF5
			AVWT-343HKF5	AVWT-343HKF5	AVWT-386HKF5	AVWT-386HKF5	AVWT-386HKF5
			AVWT-343HKF5	AVWT-343HKF5	AVWT-343HKF5	AVWT-365HKF5	AVWT-386HKF5
			/	/	/	/	/
Power Supply			380-415V 3~ 50Hz/60Hz				
Cooling	Capacity*1	kW	314.0	319.5	325.0	330.5	336.0
		kBtu/h	1071.3	1090.1	1108.9	1127.6	1146.4
	Power Input	kW	100.44	102.89	105.30	107.69	110.16
	EER	kW/kW	3.13	3.11	3.09	3.07	3.05
Heating	Capacity*1	kW	351.5	358.0	364.0	370.5	376.5
		kBtu/h	1199.3	1221.4	1241.9	2287.7	1284.6
	Power Input	kW	101.92	106.34	106.99	109.64	112.05
	COP	kW/kW	3.45	3.37	3.40	3.38	3.36
Ventilation	Air Flow Rate	m³/min	1401	1401	1401	1401	1401
	Fan Quantity	pcs	6	6	6	6	6
	External Static Pressure	Pa	110	110	110	110	110
Sound	Sound Pressure Level*2	dB(A)	71	71	71	72	72
Compressor	Type	—	Enhanced Vapor Injection Scroll Compressor				
	Quantity	pcs	6	6	6	6	6
Refrigerant	Type	—	R410A				
	Pre-charged Amount	kg	16.1+16.1+16.1	16.1+16.1+16.1	16.1+16.1+16.1	16.1+16.1+16.1	16.1+16.1+16.1
Weight	Net	kg	493+482+482	493+482+482	493+493+482	493+493+493	493+493+493
	Gross	kg	530+519+519	530+519+519	530+530+519	530+530+530	530+530+530
Dimensions	External (H × W × D)	mm	1800 × (1880+1880+1880) × 825				
	Packing(H × W × D)	mm	1960 × (1940+1940+1940) × 885				
Cabinet Color		—	Gray + White				
Ref. Piping	Gas	mm	Φ53.98	Φ53.98	Φ53.98	Φ53.98	Φ53.98
		inch	2-1/8	2-1/8	2-1/8	2-1/8	2-1/8
	Liquid	mm	Φ28.6	Φ28.6	Φ28.6	Φ28.6	Φ28.6
		inch	1-1/8	1-1/8	1-1/8	1-1/8	1-1/8
Connectable Indoor Units	Quantity	pcs	128	128	128	128	128
	Connection Ratio*3	—	30%~130%	30%~130%	30%~130%	30%~130%	30%~130%
Piping Design	Height Difference Between ODU and IDU	m	110	110	110	110	110
	Height Difference Between IDUs	m	40	40	40	40	40
	Max. Piping Length	Actual m	220	220	220	220	220
		Equivalent m	260	260	260	260	260
Operation Range	Cooling	℃	-15℃ DB ~55℃ DB	-15℃ DB ~55℃ DB	-15℃ DB ~55℃ DB	-15℃ DB ~55℃ DB	-15℃ DB ~55℃ DB
	Heating	℃	-30℃ WB ~30℃ DB	-30℃ WB ~30℃ DB	-30℃ WB ~30℃ DB	-30℃ WB ~30℃ DB	-30℃ WB ~30℃ DB

- Notes:
- Rated cooling capacity and rated heating capacity are tested in the following conditions:
Cooling Conditions: indoor air inlet temperature: 27℃ DB 19℃ WB, outdoor air nlet temperature: 35℃ DB, pipe length: 7.5m, pipe height difference: 0m.
Heating Conditions: indoor air inlet temperature: 20℃ DB, outdoor air nlet temperature: 7℃ DB 6℃ WB, pipe Length: 7.5m, pipe height difference: 0m.
 - The above noise values are measured in the anechoic chamber without reflected echo, therefore the impact of the reflected echo must be included at the scene.
Measurement point: 1m from the service cover surface and 1.5m from the floor level.
 - When the connection ratio is lower than 50% or higher than 130%, please consult our local technical engineers.

Hi-FLEXi Heat Recovery Series

All in One Renewable Energy Solution

With S heat recovery series, cooling and heating of air can be realised simultaneously including water. During summer, it serves cool indoor rooms and warm water supply for night showers. With the same system, floor heating and fan coil unit heating and cooling can be done during season transition periods.

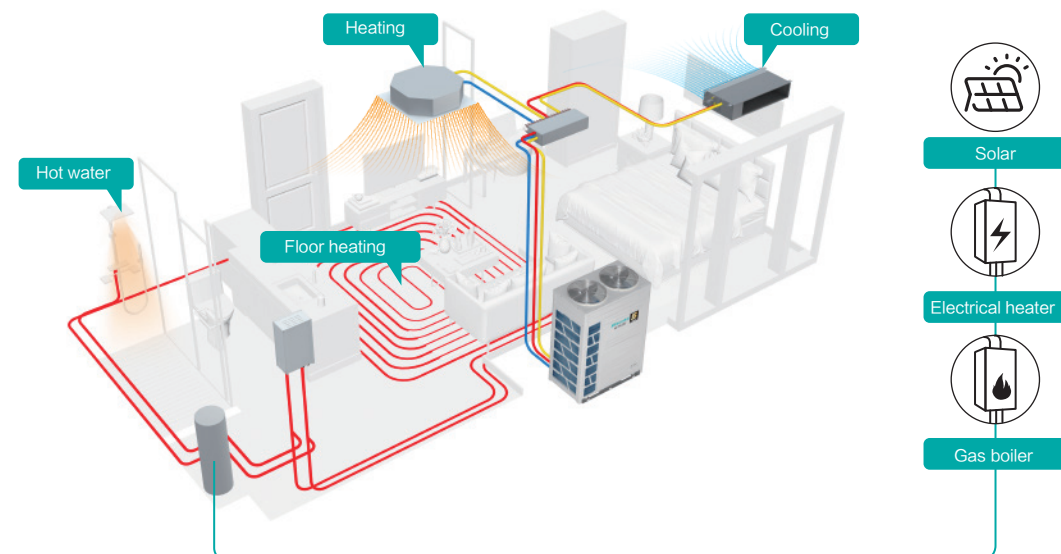

200% Connection Ratio


The powerful S heat recovery series outdoor units are connectable to indoor units up to 2 times of its own capacity with ratio of 200% for a more efficient and cost saving system.

*This feature is subject to a specific condition. For further information, please contact our engineers.




External Static Pressure

External static pressure is reachable up to 110Pa, allowing better air discharge when are installed indoors with ducting or even outdoors in poor air ventilation spaces.

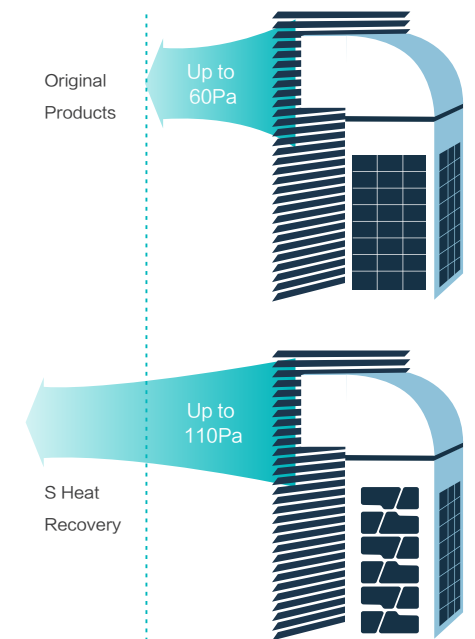

Piping Length

With extra long pipe, the height difference between the indoor unit and outdoor unit is up to 90 meters*, which makes installation more flexible.

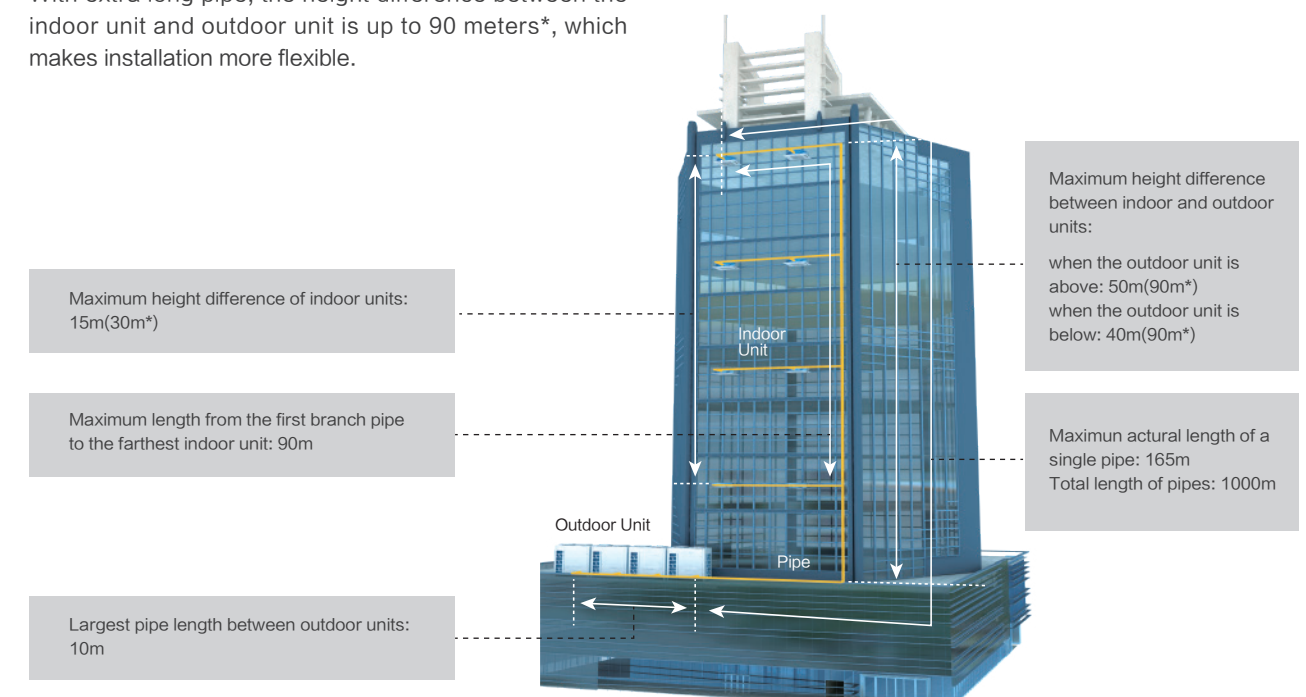


*Note: For detailed information, please contact Hisense's technical staff.


New Upgraded Switch Box

Switch box defies the complicated piping of 3pipe heat recovery systems and simplifies the system with lesser connections and piping including refrigerant and condensate piping. Now with larger capacity up to 85kW for larger systems and increased up to 16 branch ports for more indoor units connections.

Heating Domination Mode


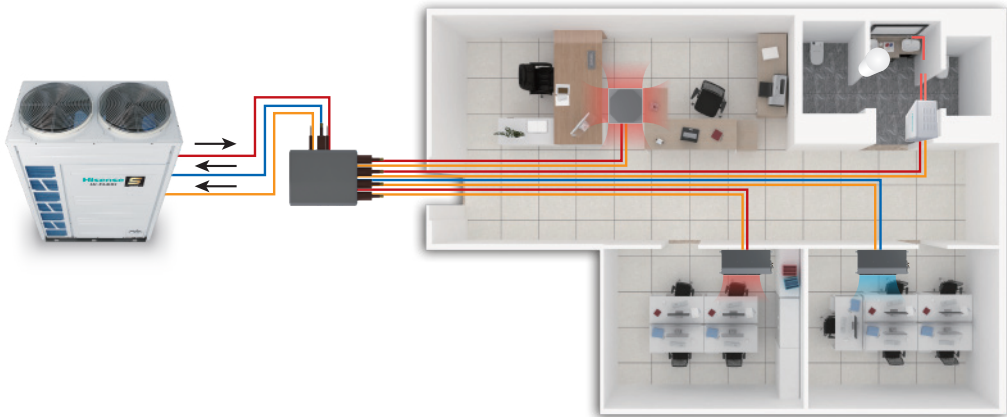


3 Pipes Without Switch Box

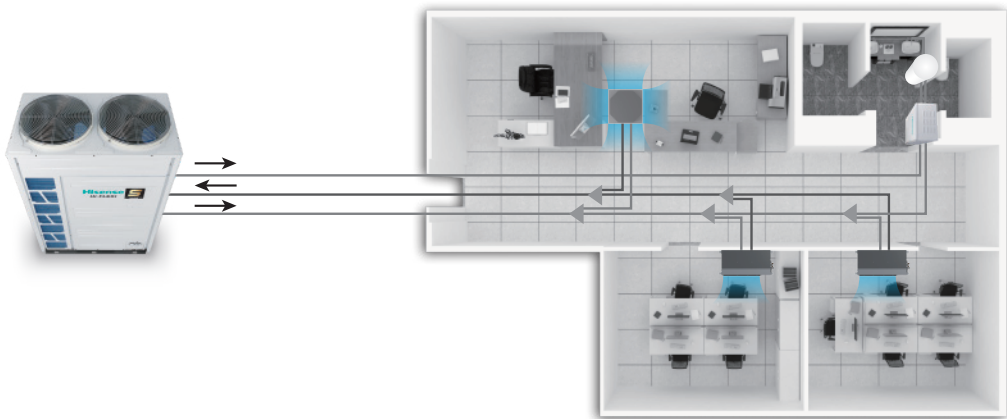

Dual 20RT EEV

Compared with conventional 10RT EEV with 480 steps, dual 20RT EEV with 3000pls can better reduce pressure loss and improve performance.

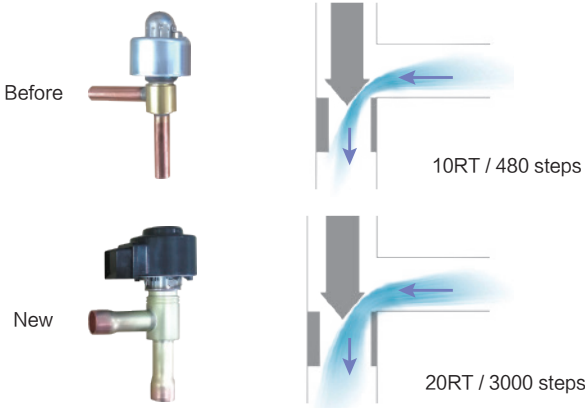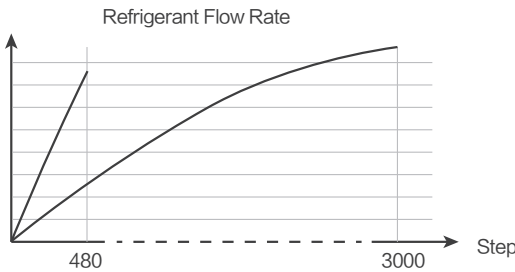

Hi-FLEXi S Heat Recovery



HP		8HP	10HP	12HP	14HP	16HP	18HP
Model	Model	AVWT-76FKFSA	AVWT-96FKFSA	AVWT-114FKFSA	AVWT-136FKFSA	AVWT-154FKFSA	AVWT-170FKFSA
	Modules	—	—	—	—	—	—
Power Supply		AC 3Φ, 380-415V/50/60Hz					
Cooling	Capacity	kW	22.4	28.0	33.5	40.0	50.0
		kBtu/h	76.4	95.5	114.3	136.5	170.6
	Power Input	kW	4.87	6.75	8.09	10.26	12.16
	EER	kW/kW	4.60	4.15	4.14	3.90	3.56
Heating	Capacity(Max/Nom)	kW	25.0 / 22.4	31.5 / 28.0	37.5 / 33.5	45.0 / 40.0	56.0 / 50.0
		kBtu/h	85.3 / 76.4	107.5 / 95.5	128.0 / 114.3	153.5 / 136.5	191.1 / 170.6
	Power Input(Max/Nom)	kW	5.20 / 4.36	6.77 / 5.63	9.17 / 7.70	10.82 / 8.89	12.14 / 10.32
	COP(Max)	kW/kW	4.81	4.65	4.09	4.16	4.12
Ventilation	Air Flow Rate	m³/min	183	183	183	200	200
	Fan Quantity		1	1	1	2	2
	Static Pressure	Pa	110	110	110	110	110
Sound	Sound Pressure Level	dB(A)	59	60	62	62	62
	Type	—	Enhanced Vapor Injection Scroll Compressor				
Compressor	Compressor Quantity	pcs	1	1	1	1	2
	Type	—	R410A				
Refrigerant	Pre-charged Quantity	kg	5.60	5.90	6.00	8.80	9.20
	Net Weight	kg	226	227	246	289	349
Weight	Gross Weight	kg	246	247	266	311	371
Dimensions	External(HxWxD)	mm	1730x950x750	1730x950x750	1730x950x750	1730x1210x750	1730x1210x750
	Packing(HxWxD)	mm	1930x1015x790	1930x1015x790	1930x1015x790	1930x1275x790	1930x1275x790
Cabinet Color			Ivory White	Ivory White	Ivory White	Ivory White	Ivory White
Heat Recovery Operation System	Low Pressure Gas Line	mm(in.)	Φ 19.05(3/4)	Φ 22.20(7/8)	Φ 25.40(1)	Φ 25.40(1)	Φ 28.60(1-1/8)
	High/Low Pressure Gas Line	mm(in.)	Φ 15.88(5/8)	Φ 19.05(3/4)	Φ 22.2(7/8)	Φ 22.2(7/8)	Φ 22.2(7/8)
	Liquid Line	mm(in.)	Φ 9.53(3/8)	Φ 9.53(3/8)	Φ 12.70(1/2)	Φ 12.70(1/2)	Φ 15.88(5/8)
Heat Pump Operation System	Gas Line	mm(in.)	Φ 19.05(3/4)	Φ 22.20(7/8)	Φ 25.40(1)	Φ 25.40(1)	Φ 28.60(1-1/8)
	Liquid Line	mm(in.)	Φ 9.53(3/8)	Φ 9.53(3/8)	Φ 12.70(1/2)	Φ 12.70(1/2)	Φ 15.88(5/8)
Connectable Indoor Units	Quantity	pcs	13	16	19	23	29
	Total Capacity	—	200%*1	200%*1	200%*1	200%*1	200%*1
Piping Design	Height Difference Between ODU and IDU	m(above)	50(90°*)	50(90°*)	50(90°*)	50(90°*)	50(90°*)
		m(below)	40(90°*)	40(90°*)	40(90°*)	40(90°*)	40(90°*)
	Height Difference Between IDUs	m	15(30°*)	15(30°*)	15(30°*)	15(30°*)	15(30°*)
	Max. Piping Length	m	165	165	165	165	165
Operation Range	Cooling	DB	-10℃~52℃	-10℃~52℃	-10℃~52℃	-10℃~52℃	-10℃~52℃
	Heating	WB	-25℃~16.5℃	-25℃~16.5℃	-25℃~16.5℃	-25℃~16.5℃	-25℃~16.5℃

Notes:
1. Rated cooling capacity and rated heating capacity are tested in the following conditions:
Cooling conditions: indoor air inlet temperature: 27℃ DB 19℃ WB, outdoor air inlet temperature: 35℃ DB, pipe length: 7.5m, pipe height difference: 0m.
Heating conditions: indoor air inlet temperature: 20℃ DB, outdoor air inlet temperature: 7℃ DB 6℃ WB, pipe length: 7.5m, pipe height difference: 0m.
2. The above noise values are measured in the anechoic chamber without reflected echo, therefore the impact of the reflected echo must be included at the scene.
3. The final appearance of outdoor units is subject to the actual products.
*: If you have any questions, please contact with the technical engineer.
*: For detailed information, please contact with Hisense's technical staff.

Hi-FLEXi S Heat Recovery



HP			20HP	22HP	24HP	26HP	28HP
Model			AVWT-190FKFSA	AVWT-212FKFSA	AVWT-232FKFSA	AVWT-250FKFSA	AVWT-272FKFSA
Model	Modules		—	—	—	—	—
	Power Supply		AC 3Φ, 380-415V/50/60Hz				
Cooling	Capacity	kW	56.0	61.5	68.0	72.5	80.0
		kBtu/h	191.1	209.8	232.0	247.4	273.0
	Power Input	kW	15.60	18.04	20.61	21.90	24.24
	EER	kW/kW	3.59	3.41	3.30	3.31	3.30
Heating	Capacity(Max/Nom)	kW	63.0 / 56.0	69.0 / 61.5	75.0 / 68.0	80.0 / 72.5	90.0 / 80.0
		kBtu/h	215.0 / 191.1	235.4 / 209.8	255.9 / 232.0	273.0 / 247.4	307.1 / 273.0
	Power Input(Max/Nom)	kW	16.54 / 13.56	18.80 / 15.89	21.43 / 18.38	22.35 / 19.23	26.01 / 21.92
	COP(Max)	kW/kW	3.81	3.67	3.50	3.58	3.46
Ventilation	Air Flow Rate	m³/min	267	296	296	350	350
	Fan Quantity		2	2	2	2	2
	Static Pressure	Pa	110	110	110	110	110
Sound	Sound Pressure Level	dB(A)	63	64	66	67	67
Compressor	Type	—	Enhanced Vapor Injection Scroll Compressor				
	Compressor Quantity	pcs	2	2	2	2	2
Refrigerant	Type	—	R410A				
	Pre-charged Quantity	kg	9.80	10.60	10.60	11.50	11.50
Weight	Net Weight	kg	369	377	378	400	401
	Gross Weight	kg	393	401	402	426	427
Dimensions	External(HxWxD)	mm	1730x1350x750	1730x1350x750	1730x1350x750	1730x1600x750	1730x1600x750
	Packing(HxWxD)	mm	1930x1420x790	1930x1420x790	1930x1420x790	1930x1665x790	1930x1665x790
Cabinet Color			Ivory White	Ivory White	Ivory White	Ivory White	Ivory White
Heat Recovery Operation System	Low Pressure Gas Line	mm(in.)	Φ28.60(1-1/8)	Φ28.60(1-1/8)	Φ28.60(1-1/8)	Φ31.75(1-1/4)	Φ31.75(1-1/4)
	High/Low Pressure Gas Line	mm(in.)	Φ22.2(7/8)	Φ25.4(1)	Φ25.4(1)	Φ25.4(1)	Φ28.6(1-1/8)
	Liquid Line	mm(in.)	Φ15.88(5/8)	Φ15.88(5/8)	Φ15.88(5/8)	Φ19.05(3/4)	Φ19.05(3/4)
Heat Pump Operation System	Gas Line	mm(in.)	Φ28.60(1-1/8)	Φ28.60(1-1/8)	Φ28.60(1-1/8)	Φ31.75(1-1/4)	Φ31.75(1-1/4)
	Liquid Line	mm(in.)	Φ15.88(5/8)	Φ15.88(5/8)	Φ15.88(5/8)	Φ19.05(3/4)	Φ19.05(3/4)
Connectable Indoor Units	Quantity	pcs	33	36	40	43	47
	Total Capacity	—	200%*1	200%*1	200%*1	200%*1	200%*1
Piping Design	Height Difference Between ODU and IDU	m(above)	50(90*2)	50(90*2)	50(90*2)	50(90*2)	50(90*2)
		m(below)	40(90*2)	40(90*2)	40(90*2)	40(90*2)	40(90*2)
	Height Difference Between IDUs	m	15(30*2)	15(30*2)	15(30*2)	15(30*2)	15(30*2)
	Max. Piping Length	m	165	165	165	165	165
Operation Range	Cooling	DB	-10℃~52℃	-10℃~52℃	-10℃~52℃	-10℃~52℃	-10℃~52℃
	Heating	WB	-25℃~16.5℃	-25℃~16.5℃	-25℃~16.5℃	-25℃~16.5℃	-25℃~16.5℃

Notes:
1. Rated cooling capacity and rated heating capacity are tested in the following conditions:
Cooling conditions: indoor air inlet temperature: 27℃ DB 19℃ WB, outdoor air inlet temperature: 35℃ DB, pipe length: 7.5m, pipe height difference: 0m.
Heating conditions: indoor air inlet temperature: 20℃ DB, outdoor air inlet temperature: 7℃ DB 6℃ WB, pipe length: 7.5m, pipe height difference: 0m.
2. The above noise values are measured in the anechoic chamber without reflected echo, therefore the impact of the reflected echo must be included at the scene.
3. The final appearance of outdoor units is subject to the actual products.
*: If you have any questions, please contact with the technical engineer.
?: For detailed information, please contact with Hisense's technical staff.

Hi-FLEXi S Heat Recovery



HP			30HP	32HP	34HP	36HP	38HP
Model			AVWT-290FKFSA	AVWT-308FKFSA	AVWT-324FKFSA	AVWT-344FKFSA	AVWT-360FKFSA
Model	Modules		AVWT-136FKFSA AVWT-154FKFSA	AVWT-154FKFSA AVWT-154FKFSA	AVWT-154FKFSA AVWT-170FKFSA	AVWT-154FKFSA AVWT-190FKFSA	AVWT-170FKFSA AVWT-190FKFSA
	Power Supply		AC 3Φ, 380-415V/50/60Hz				
Cooling	Capacity	kW	85.0	90.0	95.0	101.0	106.0
		kBtu/h	290.0	307.1	324.1	344.6	361.7
	Power Input	kW	22.41	24.32	26.20	27.75	29.64
	EER	kW/kW	3.79	3.70	3.63	3.64	3.58
Heating	Capacity(Max/Nom)	kW	95.0 / 85.0	100.0 / 90.0	106.0 / 95.0	113.0 / 101.0	119.0 / 106.0
		kBtu/h	324.1 / 290.0	341.2 / 307.1	361.7 / 324.1	385.6 / 344.6	406.0 / 361.7
	Power Input(Max/Nom)	kW	22.95 / 19.21	24.27 / 20.64	26.82 / 22.33	28.62 / 23.86	31.27 / 25.58
	COP(Max)	kW/kW	4.14	4.12	3.95	3.95	3.81
Ventilation	Air Flow Rate	m³/min	400	400	400	467	467
	Fan Quantity		4	4	4	4	4
	Static Pressure	Pa	110	110	110	110	110
Sound	Sound Pressure Level	dB(A)	67	67	67	67	67
Compressor	Type	—	Enhanced Vapor Injection Scroll Compressor				
	Compressor Quantity	pcs	2	2	3	3	4
Refrigerant	Type	—	R410A				
	Pre-charged Quantity	kg	8.80+8.80	8.80+8.80	8.80+9.20	8.80+9.80	9.20+9.80
Weight	Net Weight	kg	289+290	290+290	290+349	290+369	349+369
	Gross Weight	kg	311+312	312+312	312+371	312+393	371+393
Dimensions	External(HxWxD)	mm	1730x (1210+1210) x750	1730x (1210+1210) x750	1730x (1210+1210) x750	1730x (1210+1350) x750	1730x (1210+1350) x750
	Packing(HxWxD)	mm	1930x (1275+1275) x790	1930x (1275+1275) x790	1930x (1275+1275) x790	1930x (1275+1420) x790	1930x (1275+1420) x790
Cabinet Color			Ivory White	Ivory White	Ivory White	Ivory White	Ivory White
Heat Recovery Operation System	Low Pressure Gas Line	mm(in.)	Φ31.75(1-1/4)	Φ31.75(1-1/4)	Φ31.75(1-1/4)	Φ38.1(1-1/2)	Φ38.1(1-1/2)
	High/Low Pressure Gas Line	mm(in.)	Φ28.6(1-1/8)	Φ28.6(1-1/8)	Φ28.6(1-1/8)	Φ28.6(1-1/8)	Φ31.75(1-1/4)
	Liquid Line	mm(in.)	Φ19.05(3/4)	Φ19.05(3/4)	Φ19.05(3/4)	Φ19.05(3/4)	Φ19.05(3/4)
Heat Pump Operation System	Gas Line	mm(in.)	Φ31.75(1-1/4)	Φ31.75(1-1/4)	Φ31.75(1-1/4)	Φ38.1(1-1/2)	Φ38.1(1-1/2)
	Liquid Line	mm(in.)	Φ19.05(3/4)	Φ19.05(3/4)	Φ19.05(3/4)	Φ19.05(3/4)	Φ19.05(3/4)
Connectable Indoor Units	Quantity	pcs	50	53	56	59	64
	Total Capacity	—	200%*1	200%*1	200%*1	200%*1	200%*1
Piping Design	Height Difference Between ODU and IDU	m(above)	50(90*2)	50(90*2)	50(90*2)	50(90*2)	50(90*2)
		m(below)	40(90*2)	40(90*2)	40(90*2)	40(90*2)	40(90*2)
	Height Difference Between IDUs	m	15(30*2)	15(30*2)	15(30*2)	15(30*2)	15(30*2)
	Max. Piping Length	m	165	165	165	165	165
Operation Range	Cooling	DB	-10℃~52℃	-10℃~52℃	-10℃~52℃	-10℃~52℃	-10℃~52℃
	Heating	WB	-25℃~16.5℃	-25℃~16.5℃	-25℃~16.5℃	-25℃~16.5℃	-25℃~16.5℃

Notes:
1. Rated cooling capacity and rated heating capacity are tested in the following conditions:
Cooling conditions: indoor air inlet temperature: 27℃ DB 19℃ WB, outdoor air inlet temperature: 35℃ DB, pipe length: 7.5m, pipe height difference: 0m.
Heating conditions: indoor air inlet temperature: 20℃ DB, outdoor air inlet temperature: 7℃ DB 6℃ WB, pipe length: 7.5m, pipe height difference: 0m.
2. The above noise values are measured in the anechoic chamber without reflected echo, therefore the impact of the reflected echo must be included at the scene.
3. The final appearance of outdoor units is subject to the actual products.
*: If you have any questions, please contact with the technical engineer.
?: For detailed information, please contact with Hisense's technical staff.

Hi-FLEXi S Heat Recovery



HP			40HP	42HP	44HP	46HP	48HP
	Model		AVWT-380FKFSA	AVWT-402FKFSA	AVWT-422FKFSA	AVWT-444FKFSA	AVWT-464FKFSA
Model	Modules		AVWT-190FKFSA	AVWT-170FKFSA	AVWT-190FKFSA	AVWT-212FKFSA	AVWT-232FKFSA
			AVWT-190FKFSA	AVWT-232FKFSA	AVWT-232FKFSA	AVWT-232FKFSA	AVWT-232FKFSA
Power Supply			AC 3Φ, 380-415V/50/60Hz				
Cooling		kW	112.0	118.0	124.0	129.5	136.0
	Capacity	kBtu/h	382.1	402.6	423.1	441.9	464.0
	Power Input	kW	31.20	34.60	36.15	38.63	41.21
	EER	kW/kW	3.59	3.41	3.43	3.35	3.30
Heating	Capacity(Max/Nom)	kW	126.0 / 112.0	131.0 / 118.0	138.0 / 124.0	144.0 / 129.5	150.0 / 136.0
		kBtu/h	429.9 / 382.1	447.0 / 402.6	470.9 / 423.1	491.3 / 441.9	511.8 / 464.0
	Power Input(Max/Nom)	kW	33.07 / 27.12	36.12 / 30.30	37.92 / 31.85	40.21 / 34.25	42.86 / 36.76
	COP(Max)	kW/kW	3.81	3.63	3.64	3.58	3.50
Ventilation	Air Flow Rate	m³/min	534	496	563	592	592
	Fan Quantity		4	4	4	4	4
	Static Pressure	Pa	110	110	110	110	110
Sound	Sound Pressure Level	dB(A)	67	67	68	68	69
Compressor	Type	-	Enhanced Vapor Injection Scroll Compressor				
	Compressor Quantity	pcs	4	4	4	4	4
Refrigerant	Type	-	R410A				
	Pre-charged Quantity	kg	9.80+9.80	9.20+10.60	9.80+10.60	10.60+10.60	10.60+10.60
Weight	Net Weight	kg	369+369	349+378	369+378	377+378	378+378
	Gross Weight	kg	393+393	371+402	393+402	401+402	402+402
Dimensions			1730x	1730x	1730x	1730x	1730x
	External(HxWxD)	mm	(1350+1350)	(1210+1350)	(1350+1350)	(1350+1350)	(1350+1350)
			x750	x750	x750	x750	x750
			1930x	1930x	1930x	1930x	1930x
	Packing(HxWxD)	mm	(1420+1420)	(1275+1420)	(1420+1420)	(1420+1420)	(1420+1420)
			x790	x790	x790	x790	x790
Cabinet Color			Ivory White	Ivory White	Ivory White	Ivory White	Ivory White
Heat Recovery Operation System	Low Pressure Gas Line	mm(in.)	Φ38.1(1-1/2)	Φ38.1(1-1/2)	Φ38.1(1-1/2)	Φ38.1(1-1/2)	Φ38.1(1-1/2)
	High/Low Pressure Gas Line	mm(in.)	Φ31.75(1-1/4)	Φ31.75(1-1/4)	Φ31.75(1-1/4)	Φ31.75(1-1/4)	Φ31.75(1-1/4)
	Liquid Line	mm(in.)	Φ19.05(3/4)	Φ19.05(3/4)	Φ19.05(3/4)	Φ19.05(3/4)	Φ19.05(3/4)
Heat Pump Operation System	Gas Line	mm(in.)	Φ38.1(1-1/2)	Φ38.1(1-1/2)	Φ38.1(1-1/2)	Φ38.1(1-1/2)	Φ38.1(1-1/2)
	Liquid Line	mm(in.)	Φ19.05(3/4)	Φ19.05(3/4)	Φ19.05(3/4)	Φ19.05(3/4)	Φ19.05(3/4)
Connectable Indoor Units	Quantity	pcs	64	64	64	64	64
	Total Capacity	-	200%*1	200%*1	200%*1	200%*1	200%*1
Piping Design	Height Difference Between ODU and IDU	m(above)	50(90*2)	50(90*2)	50(90*2)	50(90*2)	50(90*2)
		m(below)	40(90*2)	40(90*2)	40(90*2)	40(90*2)	40(90*2)
	Height Difference Between IDUs	m	15(30*2)	15(30*2)	15(30*2)	15(30*2)	15(30*2)
	Max. Piping Length	m	165	165	165	165	165
Operation Range	Cooling	DB	-10℃-52℃	-10℃-52℃	-10℃-52℃	-10℃-52℃	-10℃-52℃
	Heating	WB	-25℃-16.5℃	-25℃-16.5℃	-25℃-16.5℃	-25℃-16.5℃	-25℃-16.5℃

Notes:

1. Rated cooling capacity and rated heating capacity are tested in the following conditions:
Cooling conditions: indoor air inlet temperature: 27℃ DB 19℃ WB, outdoor air inlet temperature: 35℃ DB, pipe length: 7.5m, pipe height difference: 0m.
Heating conditions: indoor air inlet temperature: 20℃ DB, outdoor air inlet temperature: 7℃ DB 6℃ WB, pipe length: 7.5m, pipe height difference: 0m.

2. The above noise values are measured in the anechoic chamber without reflected echo, therefore the impact of the reflected echo must be included at the scene.

3. The final appearance of outdoor units is subject to the actual products.

‘*’: If you have any questions, please contact with the technical engineer.

‘?’: For detailed information, please contact with Hisense's technical staff.

Hi-FLEXi S Heat Recovery



HP			50HP	52HP	54HP	56HP
	Model		AVWT-482FKFSA	AVWT-504FKFSA	AVWT-522FKFSA	AVWT-544FKFSA
Model	Modules		AVWT-232FKFSA	AVWT-232FKFSA	AVWT-250FKFSA	AVWT-272FKFSA
			AVWT-250FKFSA	AVWT-272FKFSA	AVWT-272FKFSA	AVWT-272FKFSA
Power Supply			AC 3Φ, 380-415V/50/60Hz			
Cooling		kW	140.5	148.0	152.5	160.0
	Capacity	kBtu/h	479.4	505.0	520.3	545.9
	Power Input	kW	42.51	44.85	46.15	48.48
	EER	kW/kW	3.31	3.30	3.30	3.30
Heating		kW	155.0 / 140.5	165.0 / 148.0	170.0 / 152.5	180.0 / 160.0
	Capacity(Max/Nom)	kBtu/h	528.9 / 479.4	563.0 / 505.0	580.0 / 520.3	614.2 / 545.9
	Power Input(Max/Nom)	kW	43.77 / 37.60	47.44 / 40.29	48.33 / 41.13	52.02 / 43.84
	COP(Max)	kW/kW	3.54	3.48	3.52	3.46
Ventilation	Air Flow Rate	m³/min	646	646	700	700
	Fan Quantity		4	4	4	4
Sound	Static Pressure	Pa	110	110	110	110
	Sound Pressure Level	dB(A)	70	70	70	70
Compressor	Type	—	Enhanced Vapor Injection Scroll Compressor			
	Compressor Quantity	pcs	4	4	4	4
Refrigerant	Type	—	R410A			
	Pre-charged Quantity	kg	10.60+11.50	10.60+11.50	11.50+11.50	11.50+11.50
Weight	Net Weight	kg	378+400	378+401	400+401	401+401
	Gross Weight	kg	402+426	402+427	426+427	427+427
Dimensions			1730x	1730x	1730x	1730x
	External(HxWxD)	mm	(1350+1600)	(1350+1600)	(1600+1600)	(1600+1600)
			x750	x750	x750	x750
			1930x	1930x	1930x	1930x
	Packing(HxWxD)	mm	(1420+1665)	(1420+1665)	(1665+1665)	(1665+1665)
			x790	x790	x790	x790
Cabinet Color			Ivory White	Ivory White	Ivory White	Ivory White
Heat Recovery Operation System	Low Pressure Gas Line	mm(in.)	Φ 38.1(1-1/2)	Φ 38.1(1-1/2)	Φ 38.1(1-1/2)	Φ 41.3(1-5/8)
	High/Low Pressure Gas Line	mm(in.)	Φ 31.75(1-1/4)	Φ 31.75(1-1/4)	Φ 31.75(1-1/4)	Φ 38.1(1-1/2)
	Liquid Line	mm(in.)	Φ 19.05(3/4)	Φ 19.05(3/4)	Φ 19.05(3/4)	Φ 22.2(7/8)
Heat Pump Operation System	Gas Line	mm(in.)	Φ 38.1(1-1/2)	Φ 38.1(1-1/2)	Φ 38.1(1-1/2)	Φ 41.3(1-5/8)
	Liquid Line	mm(in.)	Φ 19.05(3/4)	Φ 19.05(3/4)	Φ 19.05(3/4)	Φ 22.2(7/8)
Connectable Indoor Units	Quantity	pcs	64	64	64	64
	Total Capacity	—	200%*1	200%*1	200%*1	200%*1
Piping Design	Height Difference Between ODU and IDU	m(above)	50(90*2)	50(90*2)	50(90*2)	50(90*2)
		m(below)	40(90*2)	40(90*2)	40(90*2)	40(90*2)
	Height Difference Between IDUs	m	15(30*2)	15(30*2)	15(30*2)	15(30*2)
	Max. Piping Length	m	165	165	165	165
Operation Range	Cooling	DB	-10℃-52℃	-10℃-52℃	-10℃-52℃	-10℃-52℃
	Heating	WB	-25℃-16.5℃	-25℃-16.5℃	-25℃-16.5℃	-25℃-16.5℃

Notes:

1. Rated cooling capacity and rated heating capacity are tested in the following conditions:
Cooling conditions: indoor air inlet temperature: 27℃ DB 19℃ WB, outdoor air inlet temperature: 35℃ DB, pipe length: 7.5m, pipe height difference: 0m.
Heating conditions: indoor air inlet temperature: 20℃ DB, outdoor air inlet temperature: 7℃ DB 6℃ WB, pipe length: 7.5m, pipe height difference: 0m.

2. The above noise values are measured in the anechoic chamber without reflected echo, therefore the impact of the reflected echo must be included at the scene.

3. The final appearance of outdoor units is subject to the actual products.

‘*’: If you have any questions, please contact with the technical engineer.

‘?’: For detailed information, please contact with Hisense's technical staff.

Hi-FLEXi S Heat Recovery



HP			58HP	60HP	62HP	64HP
Model	Model		AVWT-552FKFSA	AVWT-570FKFSA	AVWT-592FKFSA	AVWT-612FKFSA
	Modules		AVWT-170KFSA	AVWT-190KFSA	AVWT-170KFSA	AVWT-190KFSA
			AVWT-170KFSA	AVWT-190KFSA	AVWT-190KFSA	AVWT-190KFSA
			AVWT-212FKFSA	AVWT-190KFSA	AVWT-232FKFSA	AVWT-232FKFSA
Power Supply		AC 3Φ, 380-415V/50/60Hz				
Cooling	Capacity	kW	161.5	168.0	174.0	180.0
		kBtu/h	551.0	573.2	593.7	614.2
	Power Input	kW	46.11	46.80	50.18	51.72
	EER	kW/kW	3.50	3.59	3.47	3.48
Heating	Capacity(Max/Nom)	kW	181.0 / 161.5	189.0 / 168.0	194.0 / 174.0	201.0 / 180.0
		kBtu/h	617.6 / 551.0	644.9 / 573.2	661.9 / 593.7	685.8 / 614.2
	Power Input(Max/Nom)	kW	48.27 / 39.89	49.61 / 40.68	52.64 / 43.83	54.43 / 45.37
	COP(Max)	kW/kW	3.75	3.81	3.69	3.69
Ventilation	Air Flow Rate	m³/min	696	801	763	830
	Fan Quantity		6	6	6	6
	Static Pressure	Pa	110	110	110	110
Sound	Sound Pressure Level	dB(A)	70	70	70	70
Compressor	Type	—	Enhanced Vapor Injection Scroll Compressor			
	Compressor Quantity	pcs	6	6	6	6
Refrigerant	Type	—	R410A			
	Pre-charged Quantity	kg	9.20+9.20+10.60	9.80+9.80+9.80	9.20+9.80+10.60	9.80+9.80+10.60
Weight	Net Weight	kg	349+349+377	369+369+369	349+369+378	369+369+378
	Gross Weight	kg	371+371+401	393+393+393	371+393+402	393+393+402
Dimensions	External(HxWxD)	mm	1730x (1210+1210+1350)	1730x (1350+1350+1350)	1730x (1210+1350+1350)	1730x (1350+1350+1350)
			x750	x750	x750	x750
	Packing(HxWxD)		1930x	1930x	1930x	1930x
		mm	(1275+1275+1420) x790	(1420+1420+1420) x790	(1275+1420+1420) x790	(1420+1420+1420) x790
Cabinet Color			Ivory White	Ivory White	Ivory White	Ivory White
Heat Recovery Operation System	Low Pressure Gas Line	mm(in.)	Φ44.5(1-3/4)	Φ44.5(1-3/4)	Φ44.5(1-3/4)	Φ44.5(1-3/4)
	High/Low Pressure Gas Line	mm(in.)	Φ41.3(1-5/8)	Φ41.3(1-5/8)	Φ41.3(1-5/8)	Φ41.3(1-5/8)
	Liquid Line	mm(in.)	Φ22.2(7/8)	Φ22.2(7/8)	Φ22.2(7/8)	Φ22.2(7/8)
Heat Pump Operation System	Gas Line	mm(in.)	Φ44.5(1-3/4)	Φ44.5(1-3/4)	Φ44.5(1-3/4)	Φ44.5(1-3/4)
	Liquid Line	mm(in.)	Φ22.2(7/8)	Φ22.2(7/8)	Φ22.2(7/8)	Φ22.2(7/8)
Connectable Indoor Units	Quantity	pcs	64	64	64	64
	Total Capacity	—	200%*1	200%*1	200%*1	200%*1
Piping Design	Height Difference Between ODU and IDU	m(above)	50(90°)	50(90°)	50(90°)	50(90°)
		m(below)	40(90°)	40(90°)	40(90°)	40(90°)
	Height Difference Between IDUs	m	15(30°)	15(30°)	15(30°)	15(30°)
	Max. Piping Length	m	165	165	165	165
Operation Range	Cooling	DB	-10℃-52℃	-10℃-52℃	-10℃-52℃	-10℃-52℃
	Heating	WB	-25℃-16.5℃	-25℃-16.5℃	-25℃-16.5℃	-25℃-16.5℃

Notes:
1. Rated cooling capacity and rated heating capacity are tested in the following conditions:
Cooling conditions: indoor air inlet temperature: 27℃ DB 19℃ WB, outdoor air inlet temperature: 35℃ DB, pipe length: 7.5m, pipe height difference: 0m.
Heating conditions: indoor air inlet temperature: 20℃ DB, outdoor air inlet temperature: 7℃ DB 6℃ WB, pipe length: 7.5m, pipe height difference: 0m.
2. The above noise values are measured in the anechoic chamber without reflected echo, therefore the impact of the reflected echo must be included at the scene.
3. The final appearance of outdoor units is subject to the actual products.
*: If you have any questions, please contact with the technical engineer.
?: For detailed information, please contact with Hisense's technical staff.

Hi-FLEXi S Heat Recovery



HP			66HP	68HP	70HP	72HP
Model	Model		AVWT-634KFSA	AVWT-654KFSA	AVWT-676KFSA	AVWT-696KFSA
	Modules		AVWT-190KFSA	AVWT-190KFSA	AVWT-212KFSA	AVWT-232KFSA
			AVWT-212KFSA	AVWT-232KFSA	AVWT-232KFSA	AVWT-232KFSA
			AVWT-232KFSA	AVWT-232KFSA	AVWT-232KFSA	AVWT-232KFSA
Power Supply		AC 3Φ, 380-415V/50/60Hz				
Cooling	Capacity	kW	185.5	192.0	197.5	204.0
		kBtu/h	632.9	655.1	673.9	696.0
	Power Input	kW	54.18	56.73	59.23	61.82
	EER	kW/kW	3.42	3.38	3.33	3.30
Heating	Capacity(Max/Nom)	kW	207.0 / 185.5	213.0 / 192.0	219.0 / 197.5	225.0 / 204.0
		kBtu/h	706.3 / 632.9	726.8 / 655.1	747.2 / 673.9	767.7 / 696.0
	Power Input(Max/Nom)	kW	56.72 / 47.74	59.33 / 50.20	61.63 / 52.62	64.29 / 55.14
	COP(Max)	kW/kW	3.65	3.59	3.55	3.50
Ventilation	Air Flow Rate	m³/min	859	859	888	888
	Fan Quantity		6	6	6	6
	Static Pressure	Pa	110	110	110	110
Sound	Sound Pressure Level	dB(A)	70	70	70	71
Compressor	Type	—	Enhanced Vapor Injection Scroll Compressor			
	Compressor Quantity	pcs	6	6	6	6
Refrigerant	Type	—	R410A			
	Pre-charged Quantity	kg	9.80+10.60+10.60	9.80+10.60+10.60	10.60+10.60+10.60	10.60+10.60+10.60
Weight	Net Weight	kg	369+377+378	369+378+378	377+378+378	378+378+378
	Gross Weight	kg	393+401+402	393+402+402	401+402+402	402+402+402
Dimensions	External(HxWxD)	mm	1730x (1350+1350+1350)	1730x (1350+1350+1350)	1730x (1350+1350+1350)	1730x (1350+1350+1350)
			x750	x750	x750	x750
	Packing(HxWxD)		1930x	1930x	1930x	1930x
		mm	(1420+1420+1420) x790	(1420+1420+1420) x790	(1420+1420+1420) x790	(1420+1420+1420) x790
Cabinet Color			Ivory White	Ivory White	Ivory White	Ivory White
Heat Recovery Operation System	Low Pressure Gas Line	mm(in.)	Φ44.5(1-3/4)	Φ50.8(2)	Φ50.8(2)	Φ50.8(2)
	High/Low Pressure Gas Line	mm(in.)	Φ41.3(1-5/8)	Φ44.5(1-3/4)	Φ44.5(1-3/4)	Φ44.5(1-3/4)
	Liquid Line	mm(in.)	Φ22.2(7/8)	Φ25.4(1)	Φ25.4(1)	Φ25.4(1)
Heat Pump Operation System	Gas Line	mm(in.)	Φ44.5(1-3/4)	Φ50.8(2)	Φ50.8(2)	Φ50.8(2)
	Liquid Line	mm(in.)	Φ22.2(7/8)	Φ25.4(1)	Φ25.4(1)	Φ25.4(1)
Connectable Indoor Units	Quantity	pcs	64	64	64	64
	Total Capacity	—	200%*1	200%*1	200%*1	200%*1
Piping Design	Height Difference Between ODU and IDU	m(above)	50(90*)	50(90*)	50(90*)	50(90*)
		m(below)	40(90*)	40(90*)	40(90*)	40(90*)
	Height Difference Between IDUs	m	15(30*)	15(30*)	15(30*)	15(30*)
	Max. Piping Length	m	165	165	165	165
Operation Range	Cooling	DB	-10℃-52℃	-10℃-52℃	-10℃-52℃	-10℃-52℃
	Heating	WB	-25℃-16.5℃	-25℃-16.5℃	-25℃-16.5℃	-25℃-16.5℃

Notes:
1. Rated cooling capacity and rated heating capacity are tested in the following conditions:
Cooling conditions: indoor air inlet temperature: 27℃ DB 19℃ WB, outdoor air inlet temperature: 35℃ DB, pipe length: 7.5m, pipe height difference: 0m.
Heating conditions: indoor air inlet temperature: 20℃ DB, outdoor air inlet temperature: 7℃ DB 6℃ WB, pipe length: 7.5m, pipe height difference: 0m.
2. The above noise values are measured in the anechoic chamber without reflected echo, therefore the impact of the reflected echo must be included at the scene.
3. The final appearance of outdoor units is subject to the actual products.
*: If you have any questions, please contact with the technical engineer.
?: For detailed information, please contact with Hisense's technical staff.

Hi-FLEXi S Heat Recovery



HP			74HP	76HP	78HP	80HP
Model	Model		AVWT-714FKFSA	AVWT-732FKFSA	AVWT-754FKFSA	AVWT-776FKFSA
	Modules		AVWT-232FKFSA	AVWT-232FKFSA	AVWT-232FKFSA	AVWT-232FKFSA
			AVWT-232FKFSA	AVWT-250FKFSA	AVWT-250FKFSA	AVWT-272FKFSA
			AVWT-250FKFSA	AVWT-250FKFSA	AVWT-272FKFSA	AVWT-272FKFSA
Power Supply		AC 3Φ, 380-415V/50/60Hz				
Cooling	Capacity	kW	208.5	213.0	220.5	228.0
		kBtu/h	711.4	726.8	752.3	777.9
	Power Input	kW	63.11	64.41	66.75	69.09
	EER	kW/kW	3.30	3.31	3.30	3.30
Heating	Capacity(Max/Nom)	kW	230.0 / 208.5	235.0 / 213.0	245.0 / 220.5	255.0 / 228.0
		kBtu/h	784.8 / 711.4	801.8 / 726.8	835.9 / 752.3	870.1 / 777.9
	Power Input(Max/Nom)	kW	65.19 / 55.98	66.11 / 56.83	69.76 / 59.51	73.45 / 62.21
	COP(Max)	kW/kW	3.53	3.55	3.51	3.47
Ventilation	Air Flow Rate	m³/min	942	996	996	996
	Fan Quantity		6	6	6	6
	Static Pressure	Pa	110	110	110	110
Sound	Sound Pressure Level	dB(A)	71	71	71	71
Compressor	Type	-	Enhanced Vapor Injection Scroll Compressor			
	Compressor Quantity	pcs	6	6	6	6
Refrigerant	Type	-	R410A			
	Pre-charged Quantity	kg	10.60+10.60+11.50	10.60+11.50+11.50	10.60+11.50+11.50	10.60+11.50+11.50
Weight	Net Weight	kg	378+378+400	378+400+400	378+400+401	378+401+401
	Gross Weight	kg	402+402+426	402+426+426	402+426+427	402+427+427
Dimensions	External(HxWxD)	mm	1730x (1350+1350+1600)	1730x (1350+1600+1600)	1730x (1350+1600+1600)	1730x (1350+1600+1600)
			x750	x750	x750	x750
	Packing(HxWxD)		1930x	1930x	1930x	1930x
		mm	(1420+1420+1665) x790	(1420+1665+1665) x790	(1420+1665+1665) x790	(1420+1665+1665) x790
Cabinet Color			Ivory White	Ivory White	Ivory White	Ivory White
Heat Recovery Operation System	Low Pressure Gas Line	mm(in.)	Φ50.8(2)	Φ50.8(2)	Φ50.8(2)	Φ50.8(2)
	High/Low Pressure Gas Line	mm(in.)	Φ44.5(1-3/4)	Φ44.5(1-3/4)	Φ44.5(1-3/4)	Φ44.5(1-3/4)
	Liquid Line	mm(in.)	Φ25.4(1)	Φ25.4(1)	Φ25.4(1)	Φ25.4(1)
Heat Pump Operation System	Gas Line	mm(in.)	Φ50.8(2)	Φ50.8(2)	Φ50.8(2)	Φ50.8(2)
	Liquid Line	mm(in.)	Φ25.4(1)	Φ25.4(1)	Φ25.4(1)	Φ25.4(1)
Connectable Indoor Units	Quantity	pcs	64	64	64	64
	Total Capacity	-	200%*1	200%*1	200%*1	200%*1
Piping Design	Height Difference Between ODU and IDU	m(above)	50(90*2)	50(90*2)	50(90*2)	50(90*2)
		m(below)	40(90*2)	40(90*2)	40(90*2)	40(90*2)
	Height Difference Between IDUs	m	15(30*2)	15(30*2)	15(30*2)	15(30*2)
	Max. Piping Length	m	165	165	165	165
Operation Range	Cooling	DB	-10℃-52℃	-10℃-52℃	-10℃-52℃	-10℃-52℃
	Heating	WB	-25℃-16.5℃	-25℃-16.5℃	-25℃-16.5℃	-25℃-16.5℃

Notes:
1. Rated cooling capacity and rated heating capacity are tested in the following conditions:
Cooling conditions: indoor air inlet temperature: 27℃ DB 19℃ WB, outdoor air inlet temperature: 35℃ DB, pipe length: 7.5m, pipe height difference: 0m.
Heating conditions: indoor air inlet temperature: 20℃ DB, outdoor air inlet temperature: 7℃ DB 6℃ WB, pipe length: 7.5m, pipe height difference: 0m.
2. The above noise values are measured in the anechoic chamber without reflected echo, therefore the impact of the reflected echo must be included at the scene.
3. The final appearance of outdoor units is subject to the actual products.
*: If you have any questions, please contact with the technical engineer.
?: For detailed information, please contact with Hisense's technical staff.

Hi-FLEXi S Heat Recovery



HP			82HP	84HP	86HP	88HP
Model	Model		AVWT-794FKFSA	AVWT-816FKFSA	AVWT-824FKFSA	AVWT-844FKFSA
	Modules		AVWT-250FKFSA	AVWT-272FKFSA	AVWT-190FKFSA	AVWT-190FKFSA
			AVWT-272FKFSA	AVWT-272FKFSA	AVWT-190FKFSA	AVWT-190FKFSA
			AVWT-272FKFSA	AVWT-272FKFSA	AVWT-212FKFSA	AVWT-232FKFSA
Power Supply			AC 3Φ, 380-415V/50/60Hz			
Cooling		kW	232.5	240.0	241.5	248.0
	Capacity	kBtu/h	793.3	818.9	824.0	846.2
	Power Input	kW	70.39	72.73	69.76	72.29
	EER	kW/kW	3.30	3.30	3.46	3.43
Heating	Capacity(Max/Nom)	kW	260.0 / 232.5	270.0 / 240.0	270.0 / 241.5	276.0 / 248.0
		kBtu/h	887.1 / 793.3	921.2 / 818.9	921.2 / 824.0	941.7 / 846.2
	Power Input(Max/Nom)	kW	74.33 / 63.05	78.03 / 65.75	73.24 / 61.26	75.83 / 63.69
	COP(Max)	kW/kW	3.50	3.46	3.69	3.64
Ventilation	Air Flow Rate	m³/min	1050	1050	1126	1126
	Fan Quantity		6	6	8	8
	Static Pressure	Pa	110	110	110	110
Sound	Sound Pressure Level	dB(A)	72	72	72	72
Compressor	Type	—	Enhanced Vapor Injection Scroll Compressor			
	Compressor Quantity	pcs	6	6	8	8
Refrigerant	Type	—	R410A			
	Pre-charged Quantity	kg	11.50+11.50+11.50	11.50+11.50+11.50	9.80+9.80+10.60+10.60	9.80+9.80+10.60+10.60
Weight	Net Weight	kg	400+401+401	401+401+401	369+369+377+378	369+369+378+378
	Gross Weight	kg	426+427+427	427+427+427	393+393+401+402	393+393+402+402
Dimensions	External (HxWxD)	mm	(1600+1600+1600)	(1600+1600+1600)	(1350+1350+1350+1350)	(1350+1350+1350+1350)
			x750	x750	x750	x750
	Packing(HxWxD)		1930x	1930x	1930x	1930x
		mm	(1665+1665+1665)	(1665+1665+1665)	(1420+1420+1420+1420)	(1420+1420+1420+1420)
Cabinet Color			x790	x790	x790	x790
Heat Recovery Operation System	Low Pressure Gas Line	mm(in.)	Φ50.8(2)	Φ50.8(2)	Φ50.8(2)	Φ50.8(2)
	High/Low Pressure Gas Line	mm(in.)	Φ44.5(1-3/4)	Φ44.5(1-3/4)	Φ44.5(1-3/4)	Φ44.5(1-3/4)
	Liquid Line	mm(in.)	Φ25.4(1)	Φ25.4(1)	Φ25.4(1)	Φ25.4(1)
Heat Pump Operation System	Gas Line	mm(in.)	Φ50.8(2)	Φ50.8(2)	Φ50.8(2)	Φ50.8(2)
	Liquid Line	mm(in.)	Φ25.4(1)	Φ25.4(1)	Φ25.4(1)	Φ25.4(1)
Connectable Indoor Units	Quantity	pcs	64	64	64	64
	Total Capacity	—	200%*1	200%*1	200%*1	200%*1
Piping Design	Height Difference Between ODU and IDU	m(above)	50(90*2)	50(90*2)	50(90*2)	50(90*2)
		m(below)	40(90*2)	40(90*2)	40(90*2)	40(90*2)
	Height Difference Between IDUs	m	15(30*2)	15(30*2)	15(30*2)	15(30*2)
	Max. Piping Length	m	165	165	165	165
Operation Range	Cooling	DB	-10℃-52℃	-10℃-52℃	-10℃-52℃	-10℃-52℃
	Heating	WB	-25℃-16.5℃	-25℃-16.5℃	-25℃-16.5℃	-25℃-16.5℃

Notes:
1. Rated cooling capacity and rated heating capacity are tested in the following conditions:
Cooling conditions: indoor air inlet temperature: 27℃ DB 19℃ WB, outdoor air inlet temperature: 35℃ DB, pipe length: 7.5m, pipe height difference: 0m.
Heating conditions: indoor air inlet temperature: 20℃ DB, outdoor air inlet temperature: 7℃ DB 6℃ WB, pipe length: 7.5m, pipe height difference: 0m.
2. The above noise values are measured in the anechoic chamber without reflected echo, therefore the impact of the reflected echo must be included at the scene.
3. The final appearance of outdoor units is subject to the actual products.
*: If you have any questions, please contact with the technical engineer.
?: For detailed information, please contact with Hisense's technical staff.

Hi-FLEXi S Heat Recovery



HP			90HP	92HP	94HP	96HP
Model	Model		AVWT-866FKFSA	AVWT-886FKFSA	AVWT-908FKFSA	AVWT-928FKFSA
	Modules		AVWT-190FKFSA	AVWT-190FKFSA	AVWT-212FKFSA	AVWT-232FKFSA
			AVWT-212FKFSA	AVWT-232FKFSA	AVWT-232FKFSA	AVWT-232FKFSA
			AVWT-232FKFSA	AVWT-232FKFSA	AVWT-232FKFSA	AVWT-232FKFSA
			AVWT-232FKFSA	AVWT-232FKFSA	AVWT-232FKFSA	AVWT-232FKFSA
Power Supply		AC 3Φ, 380-415V/50/60Hz				
Cooling	Capacity	kW	253.5	260.0	265.5	272.0
		kBtu/h	864.9	887.1	905.9	928.1
	Power Input	kW	74.77	77.33	79.83	82.42
	EER	kW/kW	3.39	3.36	3.33	3.30
Heating	Capacity(Max/Nom)	kW	282.0 / 253.5	288.0 / 260.0	294.0 / 265.5	300.0 / 272.0
		kBtu/h	962.2 / 864.9	982.7 / 887.1	1003.1 / 905.9	1023.6 / 928.1
	Power Input(Max/Nom)	kW	78.12 / 66.09	80.75 / 68.56	83.06 / 71.00	85.71 / 73.51
	COP(Max)	kW/kW	3.61	3.57	3.54	3.50
Ventilation	Air Flow Rate	m³/min	1155	1155	1184	1184
	Fan Quantity		8	8	8	8
	Static Pressure	Pa	110	110	110	110
Sound	Sound Pressure Level	dB(A)	72	72	72	72
Compressor	Type	—	Enhanced Vapor Injection Scroll Compressor			
	Compressor Quantity	pcs	8	8	8	8
Refrigerant	Type	—	R410A			
	Pre-charged Quantity	kg	9.80+10.60+10.60+10.60	9.80+10.60+10.60+10.60	10.60+10.60+10.60+10.60	10.60+10.60+10.60+10.60
Weight	Net Weight	kg	369+377+378+378	369+378+378+378	377+378+378+378	378+378+378+378
	Gross Weight	kg	393+401+402+402	393+402+402+402	401+402+402+402	402+402+402+402
Dimensions	External(HxWxD)		1730x	1730x	1730x	1730x
		mm	(1350+1350+1350+1350)	(1350+1350+1350+1350)	(1350+1350+1350+1350)	(1350+1350+1350+1350)
	Packing(HxWxD)		x750	x750	x750	x750
		mm	(1420+1420+1420+1420)	(1420+1420+1420+1420)	(1420+1420+1420+1420)	(1420+1420+1420+1420)
Cabinet Color			x790	x790	x790	x790
Heat Recovery Operation System	Low Pressure Gas Line	mm(in.)	Φ50.8(2)	Φ50.8(2)	Φ50.8(2)	Φ50.8(2)
	High/Low Pressure Gas Line	mm(in.)	Φ44.5(1-3/4)	Φ44.5(1-3/4)	Φ44.5(1-3/4)	Φ44.5(1-3/4)
	Liquid Line	mm(in.)	Φ25.4(1)	Φ25.4(1)	Φ25.4(1)	Φ25.4(1)
Heat Pump Operation System	Gas Line	mm(in.)	Φ50.8(2)	Φ50.8(2)	Φ50.8(2)	Φ50.8(2)
	Liquid Line	mm(in.)	Φ25.4(1)	Φ25.4(1)	Φ25.4(1)	Φ25.4(1)
Connectable Indoor Units	Quantity	pcs	64	64	64	64
	Total Capacity	—	200%*1	200%*1	200%*1	200%*1
Piping Design	Height Difference Between ODU and IDU	m(above)	50(90*2)	50(90*2)	50(90*2)	50(90*2)
		m(below)	40(90*2)	40(90*2)	40(90*2)	40(90*2)
	Height Difference Between IDUs	m	15(30*2)	15(30*2)	15(30*2)	15(30*2)
	Max. Piping Length	m	165	165	165	165
Operation Range	Cooling	DB	-10℃~52℃	-10℃~52℃	-10℃~52℃	-10℃~52℃
	Heating	WB	-25℃~16.5℃	-25℃~16.5℃	-25℃~16.5℃	-25℃~16.5℃

Notes:

1. Rated cooling capacity and rated heating capacity are tested in the following conditions:
Cooling conditions: indoor air inlet temperature: 27℃ DB 19℃ WB, outdoor air inlet temperature: 35℃ DB, pipe length: 7.5m, pipe height difference: 0m.
Heating conditions: indoor air inlet temperature: 20℃ DB, outdoor air inlet temperature: 7℃ DB 6℃ WB, pipe length: 7.5m, pipe height difference: 0m.

2. The above noise values are measured in the anechoic chamber without reflected echo, therefore the impact of the reflected echo must be included at the scene.

3. The final appearance of outdoor units is subject to the actual products.

*1: If you have any questions, please contact with the technical engineer.

*2: For detailed information, please contact with Hisense's technical staff.

Hi-FLEXi S Heat Recovery



HP			98HP	100HP	102HP	104HP
Model	Model		AVWT-946FKFSA	AVWT-968FKFSA	AVWT-988FKFSA	AVWT-1008FKFSA
	Modules		AVWT-232FKFSA	AVWT-232FKFSA	AVWT-212FKFSA	AVWT-232FKFSA
			AVWT-232FKFSA	AVWT-232FKFSA	AVWT-232FKFSA	AVWT-232FKFSA
			AVWT-232FKFSA	AVWT-232FKFSA	AVWT-272FKFSA	AVWT-272FKFSA
			AVWT-250FKFSA	AVWT-272FKFSA	AVWT-272FKFSA	AVWT-272FKFSA
Power Supply		AC 3Φ, 380-415V/50/60Hz				
Cooling	Capacity	kW	276.5	284.0	289.5	296.0
		kBtu/h	943.4	969.0	987.8	1010.0
	Power Input	kW	83.72	86.06	87.10	89.70
	EER	kW/kW	3.30	3.30	3.32	3.30
Heating	Capacity(Max/Nom)	kW	305.0 / 276.5	315.0 / 284.0	324.0 / 289.5	330.0 / 296.0
		kBtu/h	1040.7 / 943.4	1074.8 / 969.0	1105.5 / 987.8	1126.0 / 1010.0
	Power Input(Max/Nom)	kW	86.62 / 74.36	90.29 / 77.05	92.19 / 78.05	94.87 / 80.59
	COP(Max)	kW/kW	3.52	3.49	3.51	3.48
Ventilation	Air Flow Rate	m³/min	1238	1238	1292	1292
	Fan Quantity		8	8	8	8
	Static Pressure	Pa	110	110	110	110
Sound	Sound Pressure Level	dB(A)	72	72	72	73
Compressor	Type	—	Enhanced Vapor Injection Scroll Compressor			
	Compressor Quantity	pcs	8	8	8	8
Refrigerant	Type	—	R410A			
	Pre-charged Quantity	kg	10.60+10.60+10.60+11.50	10.60+10.60+10.60+11.50	10.60+10.60+11.50+11.50	10.60+10.60+11.50+11.50
Weight	Net Weight	kg	378+378+378+400	378+378+378+401	377+378+401+401	378+378+401+401
	Gross Weight	kg	402+402+402+426	402+402+402+427	401+402+427+427	402+402+427+427
Dimensions	External(HxWxD)	mm	1730x (1350+1350+1350+1600)	1730x (1350+1350+1350+1600)	1730x (1350+1350+1600+1600)	1730x (1350+1350+1600+1600)
			x750	x750	x750	x750
	Packing(HxWxD)		1930x	1930x	1930x	1930x
		mm	(1420+1420+1420+1665) x790	(1420+1420+1420+1665) x790	(1420+1420+1665+1665) x790	(1420+1420+1665+1665) x790
Cabinet Color			Ivory White	Ivory White	Ivory White	Ivory White
Heat Recovery Operation System	Low Pressure Gas Line	mm(in.)	Φ50.8(2)	Φ50.8(2)	Φ50.8(2)	Φ50.8(2)
	High/Low Pressure Gas Line	mm(in.)	Φ44.5(1-3/4)	Φ44.5(1-3/4)	Φ44.5(1-3/4)	Φ44.5(1-3/4)
	Liquid Line	mm(in.)	Φ25.4(1)	Φ25.4(1)	Φ25.4(1)	Φ25.4(1)
Heat Pump Operation System	Gas Line	mm(in.)	Φ50.8(2)	Φ50.8(2)	Φ50.8(2)	Φ50.8(2)
	Liquid Line	mm(in.)	Φ25.4(1)	Φ25.4(1)	Φ25.4(1)	Φ25.4(1)
Connectable Indoor Units	Quantity	pcs	64	64	64	64
	Total Capacity	—	200%*1	200%*1	200%*1	200%*1
Piping Design	Height Difference Between ODU and IDU	m(above)	50(90°)	50(90°)	50(90°)	50(90°)
		m(below)	40(90°)	40(90°)	40(90°)	40(90°)
	Height Difference Between IDUs	m	15(30°)	15(30°)	15(30°)	15(30°)
	Max. Piping Length	m	165	165	165	165
Operation Range	Cooling	DB	-10℃~52℃	-10℃~52℃	-10℃~52℃	-10℃~52℃
	Heating	WB	-25℃~16.5℃	-25℃~16.5℃	-25℃~16.5℃	-25℃~16.5℃

Notes:

1. Rated cooling capacity and rated heating capacity are tested in the following conditions:
Cooling conditions: indoor air inlet temperature: 27℃ DB 19℃ WB, outdoor air inlet temperature: 35℃ DB, pipe length: 7.5m, pipe height difference: 0m.
Heating conditions: indoor air inlet temperature: 20℃ DB, outdoor air inlet temperature: 7℃ DB 6℃ WB, pipe length: 7.5m, pipe height difference: 0m.

2. The above noise values are measured in the anechoic chamber without reflected echo, therefore the impact of the reflected echo must be included at the scene.

3. The final appearance of outdoor units is subject to the actual products.

*1: If you have any questions, please contact with the technical engineer.

*2: For detailed information, please contact with Hisense's technical staff.

Hi-FLEXi S Heat Recovery



HP			106HP	108HP	110HP	112HP
Model	Model		AVWT-1026FKFSA	AVWT-1048FKFSA	AVWT-1066FKFSA	AVWT-1088FKFSA
	Modules		AVWT-232FKFSA	AVWT-232FKFSA	AVWT-250FKFSA	AVWT-272FKFSA
			AVWT-250FKFSA	AVWT-272FKFSA	AVWT-272FKFSA	AVWT-272FKFSA
			AVWT-272FKFSA	AVWT-272FKFSA	AVWT-272FKFSA	AVWT-272FKFSA
			AVWT-272FKFSA	AVWT-272FKFSA	AVWT-272FKFSA	AVWT-272FKFSA
Power Supply		AC 3Φ, 380~415V/50/60Hz				
Cooling	Capacity	kW	300.5	308.0	312.5	320.0
		kBtu/h	1025.3	1050.9	1066.3	1091.8
	Power Input	kW	90.99	93.33	94.63	96.97
	EER	kW/kW	3.30	3.30	3.30	3.30
Heating	Capacity(Max/Nom)	kW	335.0 / 300.5	345.0 / 308.0	350.0 / 312.5	360.0 / 320.0
		kBtu/h	1143.0 / 1025.3	1177.1 / 1050.9	1194.2 / 1066.3	1228.3 / 1091.8
	Power Input(Max/Nom)	kW	95.76 / 81.42	99.46 / 84.13	100.34 / 84.96	104.05 / 87.67
	COP(Max)	kW/kW	3.50	3.47	3.49	3.46
Ventilation	Air Flow Rate	m³/min	1346	1346	1400	1400
	Fan Quantity		8	8	8	8
	Static Pressure	Pa	110	110	110	110
Sound	Sound Pressure Level	dB(A)	73	73	73	73
Compressor	Type	—	Enhanced Vapor Injection Scroll Compressor			
	Compressor Quantity	pcs	8	8	8	8
Refrigerant	Type	—	R410A			
	Pre-charged Quantity	kg	10.60+11.50+11.50+11.50	10.60+11.50+11.50+11.50	11.50+11.50+11.50+11.50	11.50+11.50+11.50+11.50
Weight	Net Weight	kg	378+400+401+401	378+401+401+401	400+401+401+401	401+401+401+401
	Gross Weight	kg	402+426+427+427	402+427+427+427	426+427+427+427	427+427+427+427
Dimensions	External(HxWxD)	mm	1730x	1730x	1730x	1730x
			(1350+1600+1600+1600)	(1350+1600+1600+1600)	(1600+1600+1600+1600)	(1600+1600+1600+1600)
	Packing(HxWxD)	mm	x750	x750	x750	x750
			1930x	1930x	1930x	1930x
			(1420+1665+1665+1665)	(1420+1665+1665+1665)	(1665+1665+1665+1665)	(1665+1665+1665+1665)
			x790	x790	x790	x790
Cabinet Color			Ivory White	Ivory White	Ivory White	Ivory White
Heat Recovery Operation System	Low Pressure Gas Line	mm(in.)	Φ50.8(2)	Φ50.8(2)	Φ50.8(2)	Φ50.8(2)
	High/Low Pressure Gas Line	mm(in.)	Φ44.5(1~3/4)	Φ44.5(1~3/4)	Φ44.5(1~3/4)	Φ44.5(1~3/4)
	Liquid Line	mm(in.)	Φ25.4(1)	Φ25.4(1)	Φ25.4(1)	Φ25.4(1)
Heat Pump Operation System	Gas Line	mm(in.)	Φ50.8(2)	Φ50.8(2)	Φ50.8(2)	Φ50.8(2)
	Liquid Line	mm(in.)	Φ25.4(1)	Φ25.4(1)	Φ25.4(1)	Φ25.4(1)
Connectable Indoor Units	Quantity	pcs	64	64	64	64
	Total Capacity	—	200%*1	200%*1	200%*1	200%*1
Piping Design	Height Difference Between ODU and IDU	m(above)	50(90°)	50(90°)	50(90°)	50(90°)
		m(below)	40(90°)	40(90°)	40(90°)	40(90°)
	Height Difference Between IDUs	m	15(30°)	15(30°)	15(30°)	15(30°)
	Max. Piping Length	m	165	165	165	165
Operation Range	Cooling	DB	-10℃~52℃	-10℃~52℃	-10℃~52℃	-10℃~52℃
	Heating	WB	-25℃~16.5℃	-25℃~16.5℃	-25℃~16.5℃	-25℃~16.5℃

Notes:

1. Rated cooling capacity and rated heating capacity are tested in the following conditions:
Cooling conditions: indoor air inlet temperature: 27℃ DB 19℃ WB, outdoor air inlet temperature: 35℃ DB, pipe length: 7.5m, pipe height difference: 0m.
Heating conditions: indoor air inlet temperature: 20℃ DB, outdoor air inlet temperature: 7℃ DB 6℃ WB, pipe length: 7.5m, pipe height difference: 0m.

2. The above noise values are measured in the anechoic chamber without reflected echo, therefore the impact of the reflected echo must be included at the scene.

3. The final appearance of outdoor units is subject to the actual products.

*1: If you have any questions, please contact with the technical engineer.

*2: For detailed information, please contact with Hisense's technical staff.

Switch Box

Model			Single Branch		Multiple Branch				
			HCHS-N06XC	HCHS-N10XC	HCHM-N04XC	HCHM-N08XC	HCHM-N12XC	HCHM-N16XC	
Appearance									
Electrical		Power Supply	—						
		Power Input	W	5.8	5.8	15.1	29.8	45.0	60.0
		Maximum Total Capacity of All Connected Indoor Units	kW	16.0	28.0	44.8	85.0	85.0	85.0
		Maximum Total Capacity of Connected Indoor Units Per Port	kW	16.0	28.0	16.0	16.0	16.0	16.0
		Number of Ports (for Indoor Unit)	pcs	1	1	4	8	12	16
		Maximum Number of Connected Indoor Units Per Port	pcs	8	8	8	8	6	6
		Outer Dimensions(H x W x D)	mm	191x300x214	191x300x214	260x303x352	260x543x352	260x783x352	260x1023x352
		Net Weight	kg	6.3	6.4	14.1	25.2	35.5	46.7
Noise Level		Operation Noise	dB(A)	33	33	31	31	34	34
		Max Noise	dB(A)	46	46	43	46	48	49
Refrigerant			R410A						
Refrigerant Piping (Outdoor Unit Side)	Gas Line (High/Low Pressure)	mm	15.88	15.88	22.2	22.2	25.4	28.6	
	Gas Line (Low Pressure)	mm	19.05	19.05	25.4	28.6	28.6	31.75	
	Liquid Line	mm	—	—	12.7	12.7	15.88	19.05	
Refrigerant Piping (Indoor Unit Side)	Gas Line	mm	15.88	19.05	15.88	15.88	15.88	15.88	
	Liquid Line	mm	—	—	9.52	9.52	9.52	9.52	

Hydro Box

Specification for Hydro Box

Model			AHM-080FJFAA	AHM-160FJFAA
Power Supply			AC 1Φ, 220~ 240V/50Hz AC 1Φ, 220V/60Hz	
Cooling Capacity (A 35/24℃/W 12~7℃)			7.5	12.5
Heating Capacity (A 7/6℃/W 30~35℃)			kW	8 16
Power Input			kW	0.08(3.08) 0.14(3.14)
Dimensions	H × W × D	mm	890 × 520 × 320	890 × 520 × 320
Packing Dimensions	H × W × D	mm	1120 × 595 × 462	1120 × 595 × 462
Weight	Net	kg	55	58
	Gross	kg	72	75
Heat Exchanger			Plate Heat Exchanger	
Heat Exchanger Insulation Material			Elastomeric Foam	
Water Production	Heating	℃	20 to 55	20 to 55
	DHW(with electric heater)	℃	35 to 75	35 to 75
	Cooling	℃	5 to 20	5 to 20
Sound Pressure		dB(A)	33	33
Sound Power		dB(A)	46	46
Piping Connections	Gas	mm	Φ15.88	Φ15.88
	Liquid	mm	Φ9.53	Φ9.53
Water Pump	Type		DC Motor	
	Speed		Inverter Control	
	Pumping Head	m	12.5	12.5
Booster Heating	Pumping Head for Water Circuit		5	5
	Power Input	w	100	160
		kW	3	3
Water Filter	Diameter Perforations	mm	0.85	0.85
	Material		Hpb59-1	Hpb59-1
Water Circuit	Piping Connections Diameter	mm	G1-1/4"	G1-1/4"
	Shut off Valve		Yes	Yes
	Drain Valve		Yes	Yes
	Safety Valve	Bar	3	3
	Air Purge Valve		Yes	Yes
Nominal Water		m³/h	1.38	2.75
Expansion Vessel	Volume	L	8	8
	Max. Water Pressure	Bar	3	3



Operation Range

Indoor Unit Cooling

		Maximum	Minimum
Indoor	32℃ DB / 23℃ WB		21℃ DB / 15℃ WB
Outdoor	52℃ DB*		-10℃ DB

Hydro Box Cooling

		Maximum	Minimum
Inlet Water	25℃		10℃
Outdoor	48℃ DB		10℃ DB

Hydro Box Heating (DHW)

		Maximum	Minimum
Inlet Water	54℃		10℃
Outdoor	43℃ WB		-25℃ WB**

Indoor Unit Heating

		Maximum	Minimum
Indoor	27℃ DB		15℃ DB
Outdoor	16.5℃ WB		-25℃ WB**


Hydro Box Heating (Floor Heating)

		Maximum	Minimum
Inlet Water	54℃		10℃
Outdoor	16.5℃ WB		-25℃ WB**

Hi-FLEXi mavo+ Series

Extra Long Pipe Design


With extra long pipe, the height difference between the indoor unit and outdoor unit is up to 90 meters*, which makes installation more flexible.

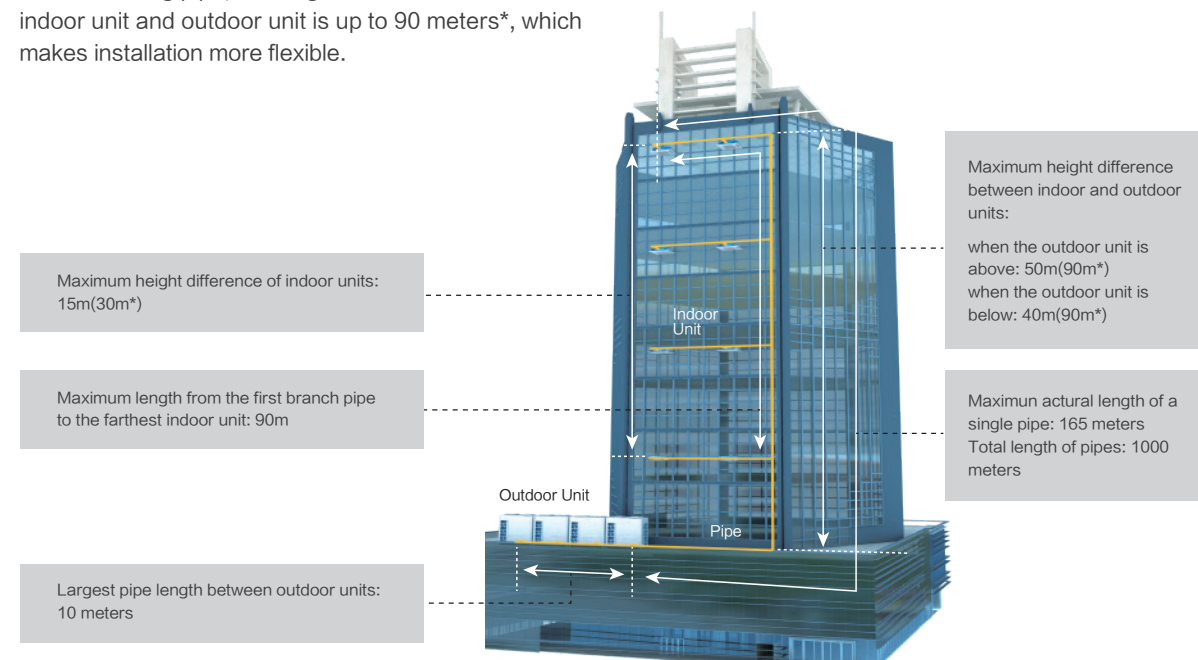

*Note: For detailed information, please contact Hisense's technical staff.

High-efficiency Compressor

Hi-FLEXi S mavo+ series adopts a new generation of scroll compressor, and it has an excellent mechanism called as FCM (Frame Compliant Mechanism) which will optimally increase the performance of the whole compressor, especially for operation under low load.

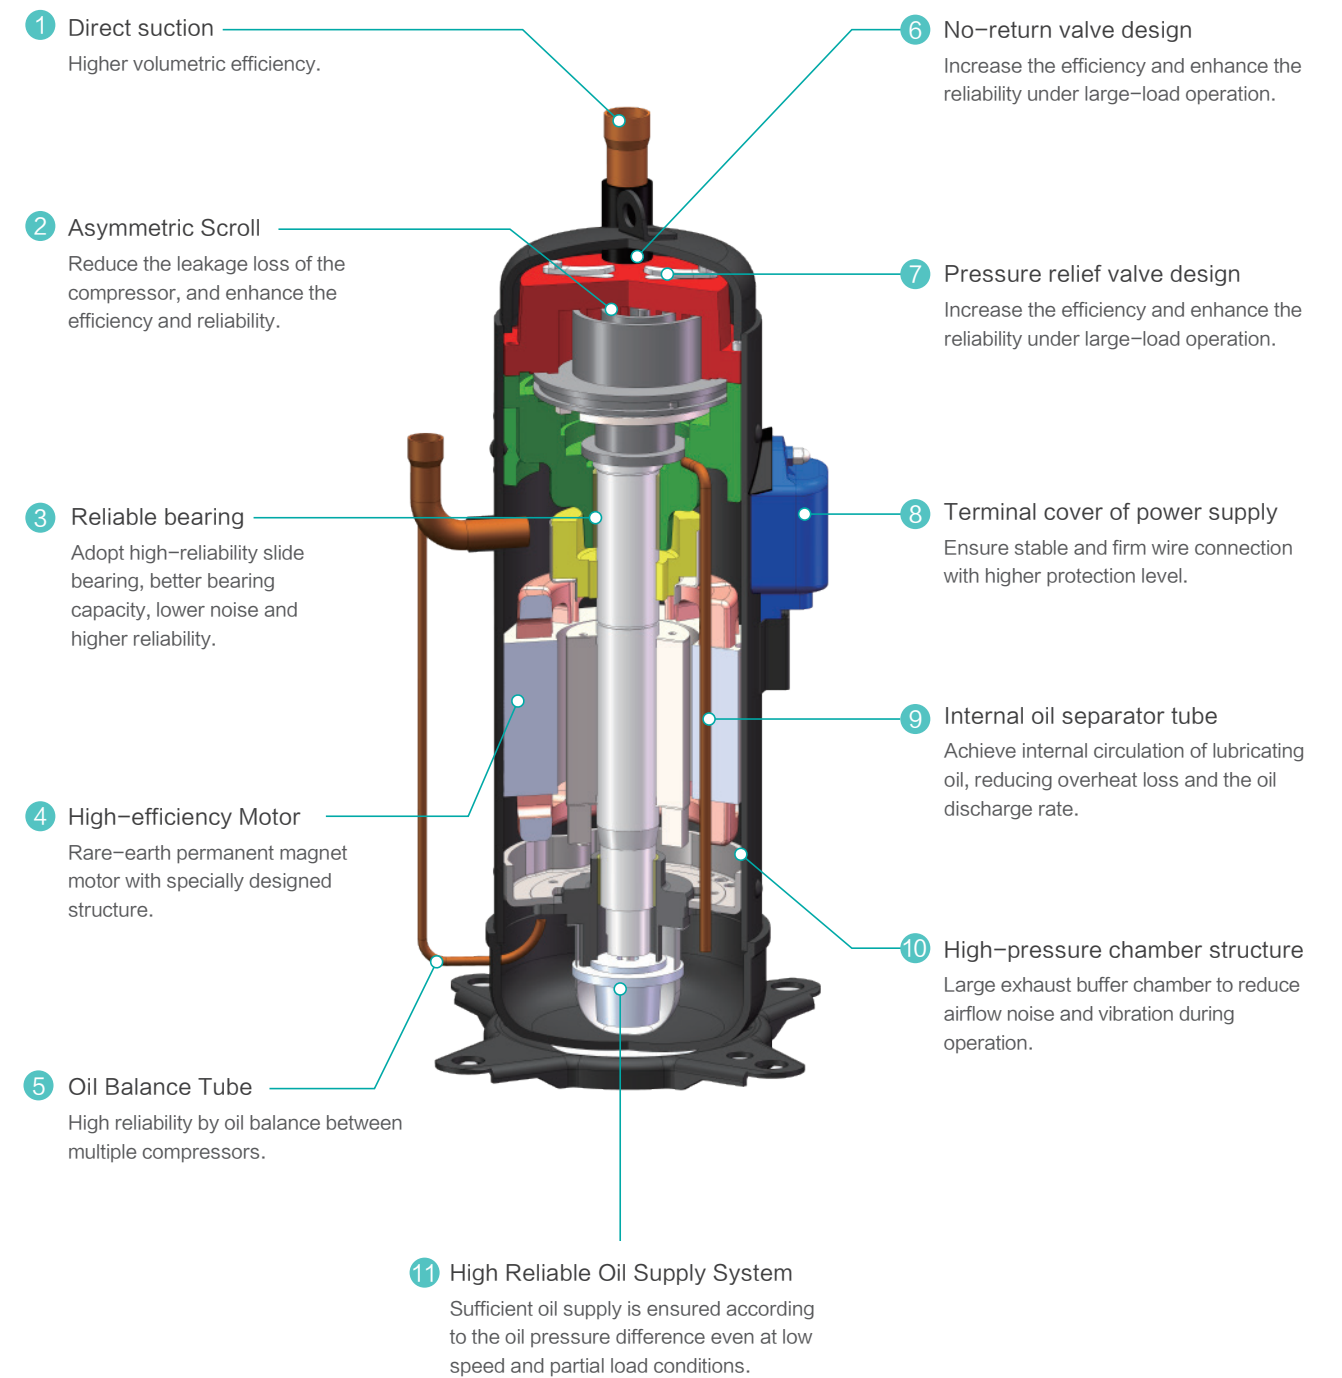

Hi-FLEXi S mavo+ Series



HP			8HP	10HP	12HP	14HP	16HP	18HP
	Model		AVWT-76HKFSEA	AVWT-96HKFSEA	AVWT-114HKFSEA	AVWT-136HKFSEA	AVWT-154HKFSEA	AVWT-170HKFSEA
Model	Modules		—	—	—	—	—	—
Power Supply			AC 3Φ, 380~415V/50/60Hz					
Cooling	Capacity	kW	22.4	28.0	33.5	40.0	45.0	50.0
		kBtu/h	76.4	95.5	114.3	136.5	153.5	170.6
	Power Input	kW	4.79	6.60	7.96	10.34	12.26	14.04
	EER	kW/kW	4.68	4.24	4.21	3.87	3.67	3.56
Heating	Capacity	kW	25.0	31.5	37.5	45.0	50.0	56.0
		kBtu/h	85.3	107.5	128.0	153.5	170.6	191.1
	Power Input	kW	5.13	6.79	8.50	10.84	12.20	14.81
	COP	kW/kW	4.87	4.64	4.41	4.15	4.10	3.78
Ventilation	Air Flow Rate	m³/min	183	183	183	200	200	200
	Fan Quantity		1	1	1	2	2	2
	Static Pressure	Pa	110	110	110	110	110	110
Sound Pressure Level	Normal Mode	dB(A)	56	57	59	59	60	61
	Night Shift Mode	dB(A)	41	42	44	44	45	46
Compressor	Type	—	Scroll Compressor					
	Compressor Quantity	pcs	1	1	1	1	1	1
Refrigerant	Type	—	R410A					
	Pre-charged Quantity	kg	5.3	5.3	6.2	8.0	8.0	9.6
Weight	Net Weight	kg	217	219	223	272	273	296
	Gross Weight	kg	246	248	252	306	307	330
Dimensions	External(HxWxD)	mm	1730x950x750	1730x950x750	1730x950x750	1730x1210x750	1730x1210x750	1730x1210x750
	Packing(HxWxD)	mm	1950x1015x790	1950x1015x790	1950x1015x790	1950x1275x790	1950x1275x790	1950x1275x790
Cabinet Color			Ivory White	Ivory White	Ivory White	Ivory White	Ivory White	Ivory White
Ref. Piping	Gas	mm	Φ19.05	Φ22.20	Φ25.40	Φ25.40	Φ28.60	Φ28.60
		inch	3/4	7/8	1	1	1-1/8	1-1/8
	Liquid	mm	Φ9.53	Φ9.53	Φ12.70	Φ12.70	Φ12.70	Φ15.88
		inch	3/8	3/8	1/2	1/2	1/2	5/8
Connectable Indoor Units	Quantity	pcs	13	16	19	23	26	29
	Total Capacity	—	50%~150%	50%~150%	50%~150%	50%~150%	50%~150%	50%~150%
Piping Design	Height Difference Between ODU and IDU	m(above)	50(90*)	50(90*)	50(90*)	50(90*)	50(90*)	50(90*)
		m(below)	40(90*)	40(90*)	40(90*)	40(90*)	40(90*)	40(90*)
	Height Difference Between IDUs	m	30	30	30	30	30	30
	Max. Piping Length	m	1000	1000	1000	1000	1000	1000
Operation Range*2	Cooling	DB	-5℃~52℃	-5℃~52℃	-5℃~52℃	-5℃~52℃	-5℃~52℃	-5℃~52℃
	Heating	WB	-25℃~16.5℃	-25℃~16.5℃	-25℃~16.5℃	-25℃~16.5℃	-25℃~16.5℃	-25℃~16.5℃

Notes:

1. Rated capacity is tested in the following conditions:
Pipe length: 7.5m, Pipe height difference: 0m; Cooling operation: indoor air inlet temperature 27℃DB 19℃WB, outdoor ambient temperature 35℃DB;
Heating operation: indoor air inlet temperature 20℃DB, outdoor ambient temperature 7℃DB 6℃WB.

2. The above noise values are measured in the anechoic chamber without reflected echo. Measurement point: 1 meter from the service cover surface and 1.5 meters from floor level.

*1: For height difference between ODU & IDU more than 50(40)m, please contact with our professional engineer.

*2: When the operation temperature is under 48℃ DB ~ 52℃ DB or -25℃ WB ~ -20℃ WB, the system may be in intermittent operation. Please contact with ur professional engineer.

Hi-FLEXi S mavo+ Series



HP			20HP	22HP	24HP	26HP	28HP
	Model		AVWT-190HKFSEA	AVWT-212HKFSEA	AVWT-232HKFSEA	AVWT-250HKFSEA	AVWT-272HKFSEA
Model	Modules		——	——	——	——	——
Power Supply			AC 3Φ, 380-415V/50/60Hz				
Cooling	Capacity	kW	56.0	61.5	68.0	72.5	80.0
		kBtu/h	191.1	209.8	232.0	247.4	273.0
	Power Input	kW	15.38	17.83	19.88	20.83	24.10
	EER	kW/kW	3.64	3.45	3.42	3.48	3.32
Heating	Capacity	kW	63.0	69.0	75.0	80.0	90.0
		kBtu/h	215.0	235.4	255.9	273.0	307.1
	Power Input	kW	16.36	18.70	20.72	21.98	25.57
	COP	kW/kW	3.85	3.69	3.62	3.64	3.52
Ventilation	Air Flow Rate	m³/min	267	296	296	350	350
	Fan Quantity		2	2	2	2	2
	Static Pressure	Pa	110	110	110	110	110
Sound Pressure Level	Normal Mode	dB(A)	62	63	63	64	64
	Night Shift Mode	dB(A)	47	48	48	49	49
Compressor	Type	—	Scroll Compressor				
	Compressor Quantity	pcs	1	2	2	2	2
Refrigerant	Type	—	R410A				
	Pre-charged Quantity	kg	10.3	12.2	12.2	12.0	12.0
Weight	Net Weight	kg	316	363	365	391	392
	Gross Weight	kg	347	400	402	433	434
Dimensions	External(HxWxD)	mm	1730x1350x750	1730x1350x750	1730x1350x750	1730x1600x750	1730x1600x750
	Packing(HxWxD)	mm	1950x1420x790	1950x1420x790	1950x1420x790	1950x1665x790	1950x1665x790
Cabinet Color			Ivory White	Ivory White	Ivory White	Ivory White	Ivory White
Ref. Piping	Gas	mm	Φ28.60	Φ28.60	Φ28.60	Φ31.75	Φ31.75
		inch	1-1/8	1-1/8	1-1/8	1-1/4	1-1/4
	Liquid	mm	Φ15.88	Φ15.88	Φ15.88	Φ19.05	Φ19.05
		inch	5/8	5/8	5/8	3/4	3/4
Connectable Indoor Units	Quantity	pcs	33	36	40	43	47
	Total Capacity	—	50%-150%	50%-150%	50%-150%	50%-150%	50%-150%
Piping Design	Height Difference Between ODU and IDU	m(above)	50(90*)	50(90*)	50(90*)	50(90*)	50(90*)
		m(below)	40(90*)	40(90*)	40(90*)	40(90*)	40(90*)
	Height Difference Between IDUs	m	30	30	30	30	30
	Max. Piping Length	m	1000	1000	1000	1000	1000
Operation Range*2	Cooling	DB	-5℃-52℃	-5℃-52℃	-5℃-52℃	-5℃-52℃	-5℃-52℃
	Heating	WB	-25℃-16.5℃	-25℃-16.5℃	-25℃-16.5℃	-25℃-16.5℃	-25℃-16.5℃

Notes:

1. Rated capacity is tested in the following conditions:
Pipe length: 7.5m, Pipe height difference: 0m; Cooling operation: indoor air inlet temperature 27℃DB 19℃WB, outdoor ambient temperature 35℃DB;
Heating operation: indoor air inlet temperature 20℃DB, outdoor ambient temperature 7℃DB 6℃WB.

2. The above noise values are measured in the anechoic chamber without reflected echo. Measurement point: 1 meter from the service cover surface and 1.5 meters from floor level.

*1: For height difference between ODU & IDU more than 50(40)m, please contact with our professional engineer.

*2: When the operation temperature is under 48℃ DB ~ 52℃ DB or -25℃ WB ~ -20℃ WB, the system may be in intermittent operation. Please contact with ur professional engineer.

Hi-FLEXi S mavo+ Series



HP			30HP	32HP	34HP	36HP
	Model		AVWT-290HKFSEA	AVWT-308HKFSEA	AVWT-324HKFSEA	AVWT-340HKFSEA
Model	Modules		AVWT-136HKFSEA	AVWT-154HKFSEA	AVWT-154HKFSEA	AVWT-170HKFSEA
			AVWT-154HKFSEA	AVWT-154HKFSEA	AVWT-170HKFSEA	AVWT-170HKFSEA
Power Supply			AC 3Φ, 380-415V/50/60Hz			
Cooling	Capacity	kW	85.0	90.0	95.0	100.0
		kBtu/h	290.0	308.0	324.0	342.0
	Power Input	kW	22.60	24.52	26.31	28.09
	EER	kW/kW	3.76	3.67	3.61	3.56
Heating	Capacity	kW	95.0	100.0	106.0	112.0
		kBtu/h	324.0	342.0	362.0	382.0
	Power Input	kW	23.04	24.39	27.01	29.63
	COP	kW/kW	4.12	4.10	3.92	3.78
Ventilation	Air Flow Rate	m³/min	400	400	400	400
	Fan Quantity		4	4	4	4
	Static Pressure	Pa	110	110	110	110
Sound Pressure Level	Normal Mode	dB(A)	64	64	64	64
	Night Shift Mode	dB(A)	49	49	49	49
Compressor	Type	—	Scroll Compressor			
	Compressor Quantity	pcs	2	2	2	2
Refrigerant	Type	—	R410A			
	Pre-charged Quantity	kg	8.0+8.0	8.0+8.0	8.0+9.6	9.6+9.6
Weight	Net Weight	kg	272+273	273+273	273+296	296+296
	Gross Weight	kg	306+307	307+307	307+330	330+330
Dimensions	External(HxWxD)	mm	1730x	1730x	1730x	1730x
			(1210+1210)	(1210+1210)	(1210+1210)	(1210+1210)
	Packing(HxWxD)	mm	x750	x750	x750	x750
			1950x	1950x	1950x	1950x
			(1275+1275)	(1275+1275)	(1275+1275)	(1275+1275)
Cabinet Color			Ivory White	Ivory White	Ivory White	Ivory White
Ref. Piping	Gas	mm	Φ31.75	Φ31.75	Φ38.10	Φ38.10
		inch	1-1/4	1-1/4	1-1/2	1-1/2
	Liquid	mm	Φ19.05	Φ19.05	Φ19.05	Φ19.05
		inch	3/4	3/4	3/4	3/4
Connectable Indoor Units	Quantity	pcs	49	52	55	59
	Total Capacity	—	50%-150%	50%-150%	50%-150%	50%-150%
Piping Design	Height Difference Between ODU and IDU	m(above)	50(90**)	50(90**)	50(90**)	50(90**)
		m(below)	40(90**)	40(90**)	40(90**)	40(90**)
	Height Difference Between IDUs	m	30	30	30	30
	Max. Piping Length	m	1000	1000	1000	1000
Operation Range*2	Cooling	DB	-5℃-52℃	-5℃-52℃	-5℃-52℃	-5℃-52℃
	Heating	WB	-25℃-16.5℃	-25℃-16.5℃	-25℃-16.5℃	-25℃-16.5℃

Notes:

1. Rated capacity is tested in the following conditions:
Pipe length: 7.5m, Pipe height difference: 0m; Cooling operation: indoor air inlet temperature 27℃DB 19℃WB, outdoor ambient temperature 35℃DB;
Heating operation: indoor air inlet temperature 20℃DB, outdoor ambient temperature 7℃DB 6℃WB.

2. The above noise values are measured in the anechoic chamber without reflected echo. Measurement point: 1 meter from the service cover surface and 1.5 meters from floor level.

*1: For height difference between ODU & IDU more than 50(40)m, please contact with our professional engineer.

*2: When the operation temperature is under 48℃ DB ~ 52℃ DB or -25℃ WB ~ -20℃ WB, the system may be in intermittent operation. Please contact with ur professional engineer.

Hi-FLEXi S mavo+ Series



HP			38HP	40HP	42HP	44HP	46HP
	Model		AVWT-360HKFSEA	AVWT-380HKFSEA	AVWT-402HKFSEA	AVWT-422HKFSEA	AVWT-444HKFSEA
Model	Modules		AVWT-170HKFSEA	AVWT-190HKFSEA	AVWT-170HKFSEA	AVWT-190HKFSEA	AVWT-212HKFSEA
			AVWT-190HKFSEA	AVWT-190HKFSEA	AVWT-232HKFSEA	AVWT-232HKFSEA	AVWT-232HKFSEA
Power Supply			AC 3Φ, 380-415V/50/60Hz				
Cooling	Capacity	kW	106.0	112.0	118.0	124.0	129.5
		kBtu/h	362.0	382.0	405.0	425.0	440.0
	Power Input	kW	29.43	30.77	33.93	35.27	37.71
	EER	kW/kW	3.60	3.64	3.48	3.52	3.43
Heating	Capacity	kW	119.0	126.0	131.0	138.0	144.0
		kBtu/h	405.0	430.0	445.0	470.0	490.0
	Power Input	kW	31.18	32.73	35.53	37.08	39.42
	COP	kW/kW	3.82	3.85	3.69	3.72	3.65
Ventilation	Air Flow Rate	m³/min	467	496	496	563	592
	Fan Quantity		4	4	4	4	4
	Static Pressure	Pa	110	110	110	110	110
Sound Pressure Level	Normal Mode	dB(A)	65	65	65	66	66
	Night Shift Mode	dB(A)	50	50	50	51	51
Compressor	Type	—	Scroll Compressor				
	Compressor Quantity	pcs	2	2	3	3	4
Refrigerant	Type	—	R410A				
	Pre-charged Quantity	kg	9.6+10.3	10.3+10.3	9.6+12.2	10.3+12.2	12.2+12.2
Weight	Net Weight	kg	296+316	316+316	296+365	316+365	363+365
	Gross Weight	kg	330+347	347+347	330+402	347+402	400+402
Dimensions	External(HxWxD)	mm	1730x (1210+1350) x750	1730x (1210+1350) x750	1730x (1210+1350) x750	1730x (1350+1350) x750	1730x (1350+1350) x750
			1950x	1950x	1950x	1950x	1950x
	Packing(HxWxD)	mm	(1275+1420) x790	(1275+1420) x790	(1275+1420) x790	(1420+1420) x790	(1420+1420) x790
Cabinet Color			Ivory White	Ivory White	Ivory White	Ivory White	Ivory White
Ref. Piping	Gas	mm	Φ 38.10	Φ 38.10	Φ 38.10	Φ 38.10	Φ 41.30
		inch	1-1/2	1-1/2	1-1/2	1-1/2	1-5/8
	Liquid	mm	Φ 19.05	Φ 19.05	Φ 19.05	Φ 19.05	Φ 22.20
		inch	3/4	3/4	3/4	3/4	7/8
Connectable Indoor Units	Quantity	pcs	62	64	64	64	64
	Total Capacity	—	50%~150%	50%~150%	50%~150%	50%~150%	50%~150%
Piping Design	Height Difference Between ODU and IDU	m(above)	50(90*)	50(90*)	50(90*)	50(90*)	50(90*)
		m(below)	40(90*)	40(90*)	40(90*)	40(90*)	40(90*)
	Height Difference Between IDUs	m	30	30	30	30	30
	Max. Piping Length	m	1000	1000	1000	1000	1000
Operation Range*2	Cooling	DB	-5℃~52℃	-5℃~52℃	-5℃~52℃	-5℃~52℃	-5℃~52℃
	Heating	WB	-25℃~16.5℃	-25℃~16.5℃	-25℃~16.5℃	-25℃~16.5℃	-25℃~16.5℃

Notes:

1. Rated capacity is tested in the following conditions:
Pipe length: 7.5m, Pipe height difference: 0m; Cooling operation: indoor air inlet temperature 27℃DB 19℃WB, outdoor ambient temperature 35℃DB;
Heating operation: indoor air inlet temperature 20℃DB, outdoor ambient temperature 7℃DB 6℃WB.

2. The above noise values are measured in the anechoic chamber without reflected echo. Measurement point: 1 meter from the service cover surface and 1.5 meters from floor level.

*1: For height difference between ODU & IDU more than 50(40)m, please contact with our professional engineer.

*2: When the operation temperature is under 48℃ DB ~ 52℃ DB or -25℃ WB ~ -20℃ WB, the system may be in intermittent operation. Please contact with ur professional engineer.

Hi-FLEXi S mavo+ Series



HP			48HP	50HP	52HP	54HP	56HP
	Model		AVWT-464HKFSEA	AVWT-482HKFSEA	AVWT-504HKFSEA	AVWT-522HKFSEA	AVWT-544HKFSEA
Model	Modules		AVWT-232HKFSEA	AVWT-232HKFSEA	AVWT-232HKFSEA	AVWT-250HKFSEA	AVWT-272HKFSEA
			AVWT-232HKFSEA	AVWT-250HKFSEA	AVWT-272HKFSEA	AVWT-272HKFSEA	AVWT-272HKFSEA
Power Supply			AC 3Φ, 380~415V/50/60Hz				
Cooling	Capacity	kW	136.0	140.5	148.0	152.5	160.0
		kBtu/h	465.0	480.0	505.0	520.0	545.0
	Power Input	kW	39.77	40.72	43.98	44.93	48.19
	EER	kW/kW	3.42	3.45	3.37	3.39	3.32
Heating	Capacity	kW	150.0	155.0	165.0	170.0	180.0
		kBtu/h	510.0	530.0	565.0	580.0	615.0
	Power Input	kW	41.44	42.70	46.29	47.55	51.14
	COP	kW/kW	3.62	3.63	3.56	3.58	3.52
Ventilation	Air Flow Rate	m³/min	592	646	646	700	700
	Fan Quantity		4	4	4	4	4
	Static Pressure	Pa	110	110	110	110	110
Sound Pressure Level	Normal Mode	dB(A)	66	67	67	67	67
	Night Shift Mode	dB(A)	51	52	52	52	52
Compressor	Type	—	Scroll Compressor				
	Compressor Quantity	pcs	4	4	4	4	4
Refrigerant	Type	—	R410A				
	Pre-charged Quantity	kg	12.2+12.2	12.2+12.0	12.2+12.0	12.0+12.0	12.0+12.0
Weight	Net Weight	kg	365+365	365+391	365+392	391+392	392+392
	Gross Weight	kg	402+402	402+433	402+434	433+434	434+434
Dimensions			1730x	1730x	1730x	1730x	1730x
	External(HxWxD)	mm	(1350+1350)	(1350+1600)	(1350+1600)	(1600+1600)	(1600+1600)
			x750	x750	x750	x750	x750
	Packing(HxWxD)	mm	1950x	1950x	1950x	1950x	1950x
			(1420+1420)	(1420+1665)	(1420+1665)	(1665+1665)	(1665+1665)
Cabinet Color			x790	x790	x790	x790	x790
			Ivory White	Ivory White	Ivory White	Ivory White	Ivory White
Ref. Piping	Gas	mm	Φ41.3	Φ41.3	Φ41.3	Φ41.3	Φ41.3
		inch	1-5/8	1-5/8	1-5/8	1-5/8	1-5/8
	Liquid	mm	Φ22.2	Φ22.2	Φ22.2	Φ22.2	Φ22.2
		inch	7/8	7/8	7/8	7/8	7/8
Connectable Indoor Units	Quantity	pcs	64	64	64	64	64
	Total Capacity	—	50%~150%	50%~150%	50%~150%	50%~150%	50%~150%
Piping Design	Height Difference Between ODU and IDU	m(above)	50(90*1)	50(90*1)	50(90*1)	50(90*1)	50(90*1)
		m(below)	40(90*1)	40(90*1)	40(90*1)	40(90*1)	40(90*1)
	Height Difference Between IDUs	m	30	30	30	30	30
	Max. Piping Length	m	1000	1000	1000	1000	1000
Operation Range*2	Cooling	DB	-5℃~52℃	-5℃~52℃	-5℃~52℃	-5℃~52℃	-5℃~52℃
	Heating	WB	-25℃~16.5℃	-25℃~16.5℃	-25℃~16.5℃	-25℃~16.5℃	-25℃~16.5℃

Notes:
1. Rated capacity is tested in the following conditions:
Pipe length: 7.5m, Pipe height difference: 0m; Cooling operation: indoor air inlet temperature 27℃DB 19℃WB, outdoor ambient temperature 35℃DB;
Heating operation: indoor air inlet temperature 20℃DB, outdoor ambient temperature 7℃DB 6℃WB.
2. The above noise values are measured in the anechoic chamber without reflected echo. Measurement point: 1 meter from the service cover surface and 1.5 meters from floor level.
*: For height difference between ODU & IDU more than 50(40)m, please contact with our professional engineer.
?: When the operation temperature is under 48℃ DB ~ 52℃ DB or -25℃ WB ~ -20℃ WB, the system may be in intermittent operation. Please contact with ur professional engineer.

Hi-FLEXi S mavo+ Series



HP			58HP	60HP	62HP	64HP
	Model		AVWT-552HKFSEA	AVWT-572HKFSEA	AVWT-592HKFSEA	AVWT-612HKFSEA
Model	Modules		AVWT-170HKFSEA	AVWT-170HKFSEA	AVWT-170HKFSEA	AVWT-190HKFSEA
			AVWT-170HKFSEA	AVWT-170HKFSEA	AVWT-190HKFSEA	AVWT-190HKFSEA
			AVWT-212HKFSEA	AVWT-232HKFSEA	AVWT-232HKFSEA	AVWT-232HKFSEA
Power Supply		AC 3Φ, 380-415V/50/60Hz				
Cooling	Capacity	kW	161.5	168.0	174.0	180.0
		kBtu/h	550.0	575.0	595.0	615.0
	Power Input	kW	45.92	47.97	49.31	50.65
	EER	kW/kW	3.52	3.50	3.53	3.55
Heating	Capacity	kW	181.0	187.0	194.0	201.0
		kBtu/h	620.0	640.0	660.0	685.0
	Power Input	kW	48.33	50.35	51.90	53.45
	COP	kW/kW	3.75	3.71	3.74	3.76
Ventilation	Air Flow Rate	m³/min	696	696	763	792
	Fan Quantity		6	6	6	6
	Static Pressure	Pa	110	110	110	110
Sound Pressure Level	Normal Mode	dB(A)	67	67	67	67
	Night Shift Mode	dB(A)	52	52	52	52
Compressor	Type	—	Scroll Compressor			
	Compressor Quantity	pcs	4	4	4	4
Refrigerant	Type	—	R410A			
	Pre-charged Quantity	kg	9.6+9.6+12.2	9.6+9.6+12.2	9.6+10.3+12.2	10.3+10.3+12.2
Weight	Net Weight	kg	296+296+363	296+296+365	296+316+365	316+316+365
	Gross Weight	kg	330+330+400	330+330+402	330+347+402	347+347+402
Dimensions	External(HxWxD)		1730x	1730x	1730x	1730x
		mm	(1210+1210+1350)	(1210+1210+1350)	(1210+1350+1350)	(1210+1350+1350)
	Packing(HxWxD)		x750	x750	x750	x750
		mm	(1275+1275+1420)	(1275+1275+1420)	(1275+1420+1420)	(1275+1420+1420)
Cabinet Color			x790	x790	x790	x790
			Ivory White	Ivory White	Ivory White	Ivory White
Ref. Piping	Gas	mm	Φ44.5	Φ44.5	Φ44.5	Φ44.5
		inch	1-3/4	1-3/4	1-3/4	1-3/4
	Liquid	mm	Φ22.2	Φ22.2	Φ22.2	Φ22.2
		inch	7/8	7/8	7/8	7/8
Connectable Indoor Units	Quantity	pcs	64	64	64	64
	Total Capacity	—	50%-150%	50%-150%	50%-150%	50%-150%
Piping Design	Height Difference Between ODU and IDU	m(above)	50(90*)	50(90*)	50(90*)	50(90*)
		m(below)	40(90*)	40(90*)	40(90*)	40(90*)
	Height Difference Between IDUs	m	30	30	30	30
	Max. Piping Length	m	1000	1000	1000	1000
Operation Range*2	Cooling	DB	-5℃-52℃	-5℃-52℃	-5℃-52℃	-5℃-52℃
	Heating	WB	-25℃-16.5℃	-25℃-16.5℃	-25℃-16.5℃	-25℃-16.5℃

Notes:
1. Rated capacity is tested in the following conditions:
Pipe length: 7.5m, Pipe height difference: 0m; Cooling operation: indoor air inlet temperature 27℃DB 19℃WB, outdoor ambient temperature 35℃DB;
Heating operation: indoor air inlet temperature 20℃DB, outdoor ambient temperature 7℃DB 6℃WB.
2. The above noise values are measured in the anechoic chamber without reflected echo. Measurement point: 1 meter from the service cover surface and 1.5 meters from floor level.
*: For height difference between ODU & IDU more than 50(40)m, please contact with our professional engineer.
?: When the operation temperature is under 48℃ DB ~ 52℃ DB or -25℃ WB ~ -20℃ WB, the system may be in intermittent operation. Please contact with ur professional engineer.

Hi-FLEXi S mavo+ Series



HP			66HP	68HP	70HP	72HP	74HP
Model	Model		AVWT-634HKFSEA	AVWT-654HKFSEA	AVWT-676HKFSEA	AVWT-696HKFSEA	AVWT-714HKFSEA
	Modules		AVWT-170HKFSEA	AVWT-190HKFSEA	AVWT-212HKFSEA	AVWT-232HKFSEA	AVWT-232HKFSEA
			AVWT-232HKFSEA	AVWT-232HKFSEA	AVWT-232HKFSEA	AVWT-232HKFSEA	AVWT-232HKFSEA
			AVWT-232HKFSEA	AVWT-232HKFSEA	AVWT-232HKFSEA	AVWT-232HKFSEA	AVWT-250HKFSEA
Power Supply		AC 3Φ, 380~415V/50/60Hz					
Cooling	Capacity	kW	186.0	192.0	197.5	204.0	208.5
		kBtu/h	635.0	655.0	675.0	695.0	710.0
	Power Input	kW	53.81	55.15	57.59	59.65	60.60
	EER	kW/kW	3.46	3.48	3.43	3.42	3.44
Heating	Capacity	kW	206.0	213.0	219.0	225.0	230.0
		kBtu/h	705.0	725.0	745.0	770.0	785.0
	Power Input	kW	56.25	57.80	60.14	62.15	63.41
	COP	kW/kW	3.66	3.69	3.64	3.62	3.63
Ventilation	Air Flow Rate	m³/min	792	859	888	888	942
	Fan Quantity		6	6	6	6	6
	Static Pressure	Pa	110	110	110	110	110
Sound Pressure Level	Normal Mode	dB(A)	67	67	68	68	68
	Night Shift Mode	dB(A)	52	52	53	53	53
Compressor	Type	—	Scroll Compressor				
	Compressor Quantity	pcs	5	5	6	6	6
Refrigerant	Type	—	R410A				
	Pre-charged Quantity	kg	9.6+12.2+12.2	10.3+12.2+12.2	12.2+12.2+12.2	12.2+12.2+12.2	12.2+12.2+12.0
Weight	Net Weight	kg	296+365+365	316+365+365	363+365+365	365+365+365	365+365+391
	Gross Weight	kg	330+402+402	347+402+402	400+402+402	402+402+402	402+402+433
Dimensions	External(HxWxD)	mm	1730x (1210+1350+1350)	1730x (1350+1350+1350)	1730x (1350+1350+1350)	1730x (1350+1350+1350)	1730x (1350+1350+1600)
			x750	x750	x750	x750	x750
	Packing(HxWxD)	mm	1950x (1275+1420+1420)	1950x (1420+1420+1420)	1950x (1420+1420+1420)	1950x (1420+1420+1420)	1950x (1420+1420+1665)
			x790	x790	x790	x790	x790
Cabinet Color			Ivory White	Ivory White	Ivory White	Ivory White	Ivory White
Ref. Piping	Gas	mm	Φ44.5	Φ50.8	Φ50.8	Φ50.8	Φ50.8
		inch	1-3/4	2	2	2	2
	Liquid	mm	Φ22.2	Φ25.4	Φ25.4	Φ25.4	Φ25.4
		inch	7/8	1	1	1	1
Connectable Indoor Units	Quantity	pcs	64	64	64	64	64
	Total Capacity	—	50%~150%	50%~150%	50%~150%	50%~150%	50%~150%
Piping Design	Height Difference Between ODU and IDU	m(above)	50(90*)	50(90*)	50(90*)	50(90*)	50(90*)
		m(below)	40(90*)	40(90*)	40(90*)	40(90*)	40(90*)
	Height Difference Between IDUs	m	30	30	30	30	30
	Max. Piping Length	m	1000	1000	1000	1000	1000
Operation Range*2	Cooling	DB	-5℃~52℃	-5℃~52℃	-5℃~52℃	-5℃~52℃	-5℃~52℃
	Heating	WB	-25℃~16.5℃	-25℃~16.5℃	-25℃~16.5℃	-25℃~16.5℃	-25℃~16.5℃

Notes:
1. Rated capacity is tested in the following conditions:
Pipe length: 7.5m, Pipe height difference: 0m; Cooling operation: indoor air inlet temperature 27℃DB 19℃WB, outdoor ambient temperature 35℃DB;
Heating operation: indoor air inlet temperature 20℃DB, outdoor ambient temperature 7℃DB 6℃WB.
2. The above noise values are measured in the anechoic chamber without reflected echo. Measurement point: 1 meter from the service cover surface and 1.5 meters from floor level.
*1: For height difference between ODU & IDU more than 50(40)m, please contact with our professional engineer.
*2: When the operation temperature is under 48℃ DB ~ 52℃ DB or -25℃ WB ~ -20℃ WB, the system may be in intermittent operation. Please contact with ur professional engineer.

Hi-FLEXi S mavo+ Series



HP			76HP	78HP	80HP	82HP	84HP
Model	Model		AVWT-732HKFSEA	AVWT-754HKFSEA	AVWT-776HKFSEA	AVWT-794HKFSEA	AVWT-816HKFSEA
	Modules		AVWT-232HKFSEA	AVWT-232HKFSEA	AVWT-272HKFSEA	AVWT-272HKFSEA	AVWT-272HKFSEA
			AVWT-250HKFSEA	AVWT-250HKFSEA	AVWT-272HKFSEA	AVWT-272HKFSEA	AVWT-272HKFSEA
			AVWT-250HKFSEA	AVWT-272HKFSEA	AVWT-232HKFSEA	AVWT-250HKFSEA	AVWT-272HKFSEA
Power Supply		AC 3Φ, 380-415V/50/60Hz					
Cooling	Capacity	kW	213.0	220.5	228.0	232.5	240.0
		kBtu/h	725.0	750.0	780.0	795.0	820.0
	Power Input	kW	61.55	64.81	68.08	69.03	72.29
	EER	kW/kW	3.46	3.40	3.35	3.37	3.32
Heating	Capacity	kW	235.0	245.0	255.0	260.0	270.0
		kBtu/h	800.0	835.0	870.0	885.0	920.0
	Power Input	kW	64.67	68.26	71.85	73.11	76.70
	COP	kW/kW	3.63	3.59	3.55	3.56	3.52
Ventilation	Air Flow Rate	m³/min	996	996	996	1050	1050
	Fan Quantity		6	6	6	6	6
	Static Pressure	Pa	110	110	110	110	110
Sound Pressure Level	Normal Mode	dB(A)	68	68	68	69	69
	Night Shift Mode	dB(A)	53	53	53	54	54
Compressor	Type	–	Scroll Compressor				
	Compressor Quantity	pcs	6	6	6	6	6
Refrigerant	Type	–	R410A				
	Pre-charged Quantity	kg	12.2+12.0+12.0	12.2+12.0+12.0	12.0+12.0+12.2	12.0+12.0+12.0	12.0+12.0+12.0
Weight	Net Weight	kg	365+391+391	365+391+392	392+392+365	392+392+391	392+392+392
	Gross Weight	kg	402+433+433	402+433+434	434+434+402	434+434+433	434+434+434
Dimensions	External(HxWxD)	mm	1730x (1350+1600+1600)	1730x (1350+1600+1600)	1730x (1600+1600+1350)	1730x (1600+1600+1600)	1730x (1600+1600+1600)
			x750	x750	x750	x750	x750
	Packing(HxWxD)	mm	1950x (1420+1665+1665)	1950x (1420+1665+1665)	1950x (1665+1665+1420)	1950x (1665+1665+1665)	1950x (1665+1665+1665)
			x790	x790	x790	x790	x790
Cabinet Color			Ivory White	Ivory White	Ivory White	Ivory White	Ivory White
Ref. Piping	Gas	mm	Φ50.8	Φ50.8	Φ50.8	Φ50.8	Φ50.8
		inch	2	2	2	2	2
	Liquid	mm	Φ25.4	Φ25.4	Φ25.4	Φ25.4	Φ25.4
		inch	1	1	1	1	1
Connectable Indoor Units	Quantity	pcs	64	64	64	64	64
	Total Capacity	–	50%–150%	50%–150%	50%–150%	50%–150%	50%–150%
Piping Design	Height Difference Between ODU and IDU	m(above)	50(90**)	50(90**)	50(90**)	50(90**)	50(90**)
		m(below)	40(90**)	40(90**)	40(90**)	40(90**)	40(90**)
	Height Difference Between IDUs	m	30	30	30	30	30
	Max. Piping Length	m	1000	1000	1000	1000	1000
Operation Range*2	Cooling	DB	–5℃–52℃	–5℃–52℃	–5℃–52℃	–5℃–52℃	–5℃–52℃
	Heating	WB	–25℃–16.5℃	–25℃–16.5℃	–25℃–16.5℃	–25℃–16.5℃	–25℃–16.5℃

Notes:
1. Rated capacity is tested in the following conditions:
Pipe length: 7.5m, Pipe height difference: 0m; Cooling operation: indoor air inlet temperature 27℃DB 19℃WB, outdoor ambient temperature 35℃DB;
Heating operation: indoor air inlet temperature 20℃DB, outdoor ambient temperature 7℃DB 6℃WB.
2. The above noise values are measured in the anechoic chamber without reflected echo. Measurement point: 1 meter from the service cover surface and 1.5 meters from floor level.
*1: For height difference between ODU & IDU more than 50(40)m, please contact with our professional engineer.
*2: When the operation temperature is under 48℃ DB ~ 52℃ DB or -25℃ WB ~ -20℃ WB, the system may be in intermittent operation. Please contact with ur professional engineer.

Hi-FLEXi S mavo+ Series



HP			86HP	88HP	90HP	92HP
Model	Model		AVWT-824HKFSEA	AVWT-844HKFSEA	AVWT-866HKFSEA	AVWT-886HKFSEA
	Modules		AVWT-190HKFSEA	AVWT-190HKFSEA	AVWT-190HKFSEA	AVWT-190HKFSEA
			AVWT-190HKFSEA	AVWT-190HKFSEA	AVWT-212HKFSEA	AVWT-232HKFSEA
			AVWT-212HKFSEA	AVWT-232HKFSEA	AVWT-232HKFSEA	AVWT-232HKFSEA
			AVWT-232HKFSEA	AVWT-232HKFSEA	AVWT-232HKFSEA	AVWT-232HKFSEA
Power Supply		AC 3Φ, 380-415V/50/60Hz				
Cooling	Capacity	kW	241.5	248.0	253.5	260.0
		kBtu/h	825.0	845.0	865.0	885.0
	Power Input	kW	68.48	70.54	72.98	75.03
	EER	kW/kW	3.53	3.52	3.47	3.47
Heating	Capacity	kW	270.0	276.0	282.0	288.0
		kBtu/h	920.0	940.0	960.0	985.0
	Power Input	kW	72.14	74.16	76.50	78.52
	COP	kW/kW	3.74	3.72	3.69	3.67
	Air Flow Rate	m³/min	1126	1126	1155	1155
	Fan Quantity		8	8	8	8
Ventilation	Static Pressure	Pa	110	110	110	110
	Normal Mode	dB(A)	69	69	69	69
Sound Pressure Level	Night Shift Mode	dB(A)	54	54	54	54
	Type	–	Scroll Compressor			
Compressor	Compressor Quantity	pcs	6	6	7	7
Refrigerant	Type	–	R410A			
	Pre-charged Quantity	kg	10.3+10.3+12.2+12.2	10.3+10.3+12.2+12.2	10.3+12.2+12.2+12.2	10.3+12.2+12.2+12.2
Weight	Net Weight	kg	316+316+363+365	316+316+365+365	316+363+365+365	316+365+365+365
	Gross Weight	kg	347+347+400+402	347+347+402+402	347+400+402+402	347+402+402+402
Dimensions			1730x	1730x	1730x	1730x
	External(HxWxD)	mm	(1350+1350+1350+1350)	(1350+1350+1350+1350)	(1350+1350+1350+1350)	(1350+1350+1350+1350)
			x750	x750	x750	x750
	Packing(HxWxD)	mm	1950x	1950x	1950x	1950x
			(1420+1420+1420+1420)	(1420+1420+1420+1420)	(1420+1420+1420+1420)	(1420+1420+1420+1420)
			x790	x790	x790	x790
Cabinet Color			Ivory White	Ivory White	Ivory White	Ivory White
Ref. Piping	Gas	mm	Φ50.8	Φ50.8	Φ50.8	Φ50.8
		inch	2	2	2	2
	Liquid	mm	Φ25.4	Φ25.4	Φ25.4	Φ25.4
		inch	1	1	1	1
Connectable Indoor Units	Quantity	pcs	64	64	64	64
	Total Capacity	–	50%–150%	50%–150%	50%–150%	50%–150%
Piping Design	Height Difference Between ODU and IDU	m(above)	50(90**)	50(90**)	50(90**)	50(90**)
		m(below)	40(90**)	40(90**)	40(90**)	40(90**)
	Height Difference Between IDUs	m	30	30	30	30
	Max. Piping Length	m	1000	1000	1000	1000
Operation Range*2	Cooling	DB	–5℃–52℃	–5℃–52℃	–5℃–52℃	–5℃–52℃
	Heating	WB	–25℃–16.5℃	–25℃–16.5℃	–25℃–16.5℃	–25℃–16.5℃

Notes:
1. Rated capacity is tested in the following conditions:
Pipe length: 7.5m, Pipe height difference: 0m; Cooling operation: indoor air inlet temperature 27℃DB 19℃WB, outdoor ambient temperature 35℃DB;
Heating operation: indoor air inlet temperature 20℃DB, outdoor ambient temperature 7℃DB 6℃WB.
2. The above noise values are measured in the anechoic chamber without reflected echo. Measurement point: 1 meter from the service cover surface and 1.5 meters from floor level.
*: For height difference between ODU & IDU more than 50(40)m, please contact with our professional engineer.
?: When the operation temperature is under 48℃ DB ~ 52℃ DB or –25℃ WB ~ –20℃ WB, the system may be in intermittent operation. Please contact with ur professional engineer.

Hi-FLEXi S mavo+ Series



HP			94HP	96HP	98HP	100HP	102HP
Model	Model		AVWT-908HKFSEA	AVWT-928HKFSEA	AVWT-946HKFSEA	AVWT-968HKFSEA	AVWT-986HKFSEA
	Modules		AVWT-212HKFSEA	AVWT-232HKFSEA	AVWT-232HKFSEA	AVWT-232HKFSEA	AVWT-232HKFSEA
			AVWT-232HKFSEA	AVWT-232HKFSEA	AVWT-232HKFSEA	AVWT-232HKFSEA	AVWT-232HKFSEA
			AVWT-232HKFSEA	AVWT-232HKFSEA	AVWT-232HKFSEA	AVWT-232HKFSEA	AVWT-250HKFSEA
			AVWT-232HKFSEA	AVWT-232HKFSEA	AVWT-250HKFSEA	AVWT-272HKFSEA	AVWT-272HKFSEA
Power Supply		AC 3Φ, 380-415V/50/60Hz					
Cooling	Capacity	kW	265.5	272.0	276.5	284.0	288.5
		kBtu/h	905.0	930.0	945.0	970.0	985.0
	Power Input	kW	77.48	79.53	80.48	83.75	84.70
	EER	kW/kW	3.43	3.42	3.44	3.39	3.41
Heating	Capacity	kW	294.0	300.0	305.0	315.0	320.0
		kBtu/h	1005.0	1025.0	1040.0	1075.0	1090.0
	Power Input	kW	80.85	82.87	84.13	87.72	88.98
	COP	kW/kW	3.64	3.62	3.63	3.59	3.60
Ventilation	Air Flow Rate	m³/min	1184	1184	1238	1238	1292
	Fan Quantity		8	8	8	8	8
	Static Pressure	Pa	110	110	110	110	110
Sound Pressure Level	Normal Mode	dB(A)	69	69	69	70	70
	Night Shift Mode	dB(A)	54	54	54	55	55
Compressor	Type	—	Scroll Compressor				
	Compressor Quantity	pcs	8	8	8	8	8
Refrigerant	Type	—	R410A				
	Pre-charged Quantity	kg	12.2+12.2+12.2+12.2	12.2+12.2+12.2+12.2	12.2+12.2+12.2+12.0	12.2+12.2+12.2+12.0	12.2+12.2+12.0+12.0
Weight	Net Weight	kg	363+365+365+365	365+365+365+365	365+365+365+391	365+365+365+392	365+365+391+392
	Gross Weight	kg	400+402+402+402	402+402+402+402	402+402+402+433	402+402+402+434	402+402+433+434
Dimensions			1730x	1730x	1730x	1730x	1730x
	External(HxWxD)	mm	(1350+1350+1350+1350)	(1350+1350+1350+1350)	(1350+1350+1350+1600)	(1350+1350+1350+1600)	(1350+1350+1600+1600)
			x750	x750	x750	x750	x750
	Packing(HxWxD)	mm	(1420+1420+1420+1420)	(1420+1420+1420+1420)	(1420+1420+1420+1665)	(1420+1420+1420+1665)	(1420+1420+1665+1665)
Cabinet Color			Ivory White	Ivory White	Ivory White	Ivory White	Ivory White
Ref. Piping	Gas	mm	Φ50.8	Φ50.8	Φ50.8	Φ50.8	Φ50.8
		inch	2	2	2	2	2
	Liquid	mm	Φ25.4	Φ25.4	Φ25.4	Φ25.4	Φ25.4
		inch	1	1	1	1	1
Connectable Indoor Units	Quantity	pcs	64	64	64	64	64
	Total Capacity	—	50%~150%	50%~150%	50%~150%	50%~150%	50%~150%
Piping Design	Height Difference Between ODU and IDU	m(above)	50(90**)	50(90**)	50(90**)	50(90**)	50(90**)
		m(below)	40(90**)	40(90**)	40(90**)	40(90**)	40(90**)
	Height Difference Between IDUs	m	30	30	30	30	30
	Max. Piping Length	m	1000	1000	1000	1000	1000
Operation Range*2	Cooling	DB	-5℃~52℃	-5℃~52℃	-5℃~52℃	-5℃~52℃	-5℃~52℃
	Heating	WB	-25℃~16.5℃	-25℃~16.5℃	-25℃~16.5℃	-25℃~16.5℃	-25℃~16.5℃

Notes:
1. Rated capacity is tested in the following conditions:
Pipe length: 7.5m, Pipe height difference: 0m; Cooling operation: indoor air inlet temperature 27℃DB 19℃WB, outdoor ambient temperature 35℃DB;
Heating operation: indoor air inlet temperature 20℃DB, outdoor ambient temperature 7℃DB 6℃WB.
2. The above noise values are measured in the anechoic chamber without reflected echo. Measurement point: 1 meter from the service cover surface and 1.5 meters from floor level.
*: For height difference between ODU & IDU more than 50(40)m, please contact with our professional engineer.
?: When the operation temperature is under 48℃ DB ~ 52℃ DB or –25℃ WB ~ –20℃ WB, the system may be in intermittent operation. Please contact with ur professional engineer.

Hi-FLEXi S mavo+ Series



HP			104HP	106HP	108HP	110HP	112HP
Model	Model		AVWT-1008HKFSEA	AVWT-1026HKFSEA	AVWT-1048HKFSEA	AVWT-1066HKFSEA	AVWT-1088HKFSEA
	Modules		AVWT-232HKFSEA	AVWT-232HKFSEA	AVWT-232HKFSEA	AVWT-250HKFSEA	AVWT-272HKFSEA
			AVWT-232HKFSEA	AVWT-250HKFSEA	AVWT-272HKFSEA	AVWT-272HKFSEA	AVWT-272HKFSEA
			AVWT-272HKFSEA	AVWT-272HKFSEA	AVWT-272HKFSEA	AVWT-272HKFSEA	AVWT-272HKFSEA
			AVWT-272HKFSEA	AVWT-272HKFSEA	AVWT-272HKFSEA	AVWT-272HKFSEA	AVWT-272HKFSEA
Power Supply		AC 3Φ, 380-415V/50/60Hz					
Cooling	Capacity	kW	296.0	300.5	308.0	312.5	320.0
		kBtu/h	1010.0	1025.0	1050.0	1065.0	1090.0
	Power Input	kW	87.96	88.91	92.17	93.12	96.39
	EER	kW/kW	3.37	3.38	3.34	3.36	3.32
Heating	Capacity	kW	330.0	335.0	345.0	350.0	360.0
		kBtu/h	1125.0	1145.0	1175.0	1195.0	1230.0
	Power Input	kW	92.57	93.83	97.42	98.68	102.27
	COP	kW/kW	3.56	3.57	3.54	3.55	3.52
Ventilation	Air Flow Rate	m³/min	1292	1346	1346	1400	1400
	Fan Quantity		8	8	8	8	8
	Static Pressure	Pa	110	110	110	110	110
Sound Pressure Level	Normal Mode	dB(A)	70	70	70	70	70
	Night Shift Mode	dB(A)	55	55	55	55	55
Compressor	Type	–	Scroll Compressor				
	Compressor Quantity	pcs	8	8	8	8	8
Refrigerant	Type	–	R410A				
	Pre-charged Quantity	kg	12.2+12.2+12.0+12.0	12.2+12.0+12.0+12.0	12.2+12.0+12.0+12.0	12.0+12.0+12.0+12.0	12.0+12.0+12.0+12.0
Weight	Net Weight	kg	365+365+392+392	365+391+392+392	365+392+392+392	391+392+392+392	392+392+392+392
	Gross Weight	kg	402+402+434+434	402+433+434+434	402+434+434+434	433+434+434+434	434+434+434+434
Dimensions	External(HxWxD)		1730x	1730x	1730x	1730x	1730x
		mm	(1350+1350+1600+1600)	(1350+1600+1600+1600)	(1350+1600+1600+1600)	(1600+1600+1600+1600)	(1600+1600+1600+1600)
	Packing(HxWxD)		x750	x750	x750	x750	x750
			1950x	1950x	1950x	1950x	1950x
		mm	(1420+1420+1665+1665)	(1420+1665+1665+1665)	(1420+1665+1665+1665)	(1665+1665+1665+1665)	(1665+1665+1665+1665)
Cabinet Color			Ivory White	Ivory White	Ivory White	Ivory White	Ivory White
Ref. Piping	Gas	mm	Φ50.8	Φ50.8	Φ50.8	Φ50.8	Φ50.8
		inch	2	2	2	2	2
	Liquid	mm	Φ25.4	Φ25.4	Φ25.4	Φ25.4	Φ25.4
		inch	1	1	1	1	1
Connectable Indoor Units	Quantity	pcs	64	64	64	64	64
	Total Capacity	–	50%~150%	50%~150%	50%~150%	50%~150%	50%~150%
Piping Design	Height Difference Between ODU and IDU	m(above)	50(90'')	50(90'')	50(90'')	50(90'')	50(90'')
		m(below)	40(90'')	40(90'')	40(90'')	40(90'')	40(90'')
	Height Difference Between IDUs	m	30	30	30	30	30
		Max. Piping Length	m	1000	1000	1000	1000
Operation Range*2	Cooling	DB	–5℃~52℃	–5℃~52℃	–5℃~52℃	–5℃~52℃	–5℃~52℃
	Heating	WB	–25℃~16.5℃	–25℃~16.5℃	–25℃~16.5℃	–25℃~16.5℃	–25℃~16.5℃

Notes:

1. Rated capacity is tested in the following conditions:

Pipe length: 7.5m, Pipe height difference: 0m; Cooling operation: indoor air inlet temperature 27°CDB 19°CWB, outdoor ambient temperature 35°CDB;

Heating operation: indoor air inlet temperature 20°CDB, outdoor ambient temperature 7°CDB 6°CWB.


2. The above noise values are measured in the anechoic chamber without reflected echo. Measurement point: 1 meter from the service cover surface and 1.5 meters from floor level.

*1: For height difference between ODU & IDU more than 50(40)m, please contact with our professional engineer.

*2: When the operation temperature is under 48°C DB ~ 52°C DB or -25°C WB ~ -20°C WB, the system may be in intermittent operation. Please contact with ur professional engineer.

Hi-FLEXi **X3** SeriesHigh Performance
Beyond Expectations


- 1 Wide capacity range 8~112HP
- 2 High-efficiency twin rotary compressor
- 3 Triple backup operation
- 4 Automatic refrigerant recycling



- 5 PCB refrigerant cooling technology



- 7 Automatic refrigerant charging



- 6 G-type heat exchanger with higher heat exchange efficiency

Hi-FLEXi X3 Series



HP		8HP	10HP	12HP	14HP	16HP	18HP
Model		AVWT-76HKFXE	AVWT-96HKFXE	AVWT-114HKFXE	AVWT-136HKFXE	AVWT-154HKFXE	AVWT-170HKFXE
Model	Modules	—	—	—	—	—	—
	Power Supply	AC 3Φ, 380~415V/50Hz, 380V/60Hz					
Cooling	Capacity	kW	22.4	28.0	33.5	40.0	50.4
		kBtu/h	76.4	95.5	114.3	136.5	172.0
	Power Input	kW	5.46	7.09	9.18	11.32	13.10
	EER	kW/kW	4.10	3.95	3.65	3.53	3.44
Heating	Capacity	kW	25.0	31.5	37.5	45.0	50.0
		kBtu/h	85.3	107.5	128.0	153.5	170.6
	Power Input	kW	5.57	7.35	9.21	11.21	12.99
	COP	kW/kW	4.49	4.29	4.07	4.01	3.85
Ventilation	Air Flow Rate	m³/min	170	175	183	205	210
	Fan Quantity		1	1	1	2	2
	Static Pressure	Pa	110	110	110	110	110
Sound Pressure Level	Normal Mode	dB(A)	56	57	59	59	60
	Night Shift Mode	dB(A)	41	42	44	44	45
Compressor	Type	—	Twin Rotary				
	Compressor Quantity	pcs	1	1	1	1	1
Refrigerant	Type	—	R410A				
	Pre-charged Quantity	kg	5.3	5.3	5.8	8.1	10.2
Weight	Net Weight	kg	204	206	213	258	279
	Gross Weight	kg	223	225	231	278	300
Dimensions	External(HxWxD)	mm	1730x950x750	1730x950x750	1730x950x750	1730x1210x750	1730x1210x750
	Packing(HxWxD)	mm	1950x1015x790	1950x1015x790	1950x1015x790	1950x1275x790	1950x1275x790
Cabinet Color			Ivory White	Ivory White	Ivory White	Ivory White	Ivory White
Ref. Piping	Gas	mm	Φ19.05	Φ22.20	Φ25.40	Φ25.40	Φ28.60
		inch	3/4	7/8	1	1	1-1/8
	Liquid	mm	Φ9.53	Φ9.53	Φ12.70	Φ12.70	Φ15.88
		inch	3/8	3/8	1/2	1/2	5/8
Connectable Indoor Units	Quantity	pcs	13	16	19	23	26
	Total Capacity	—	50%~150%	50%~150%	50%~150%	50%~150%	50%~150%
Piping Design	Height Difference Between ODU and IDU	m(above)	50(90*)	50(90*)	50(90*)	50(90*)	50(90*)
		m(below)	40(90*)	40(90*)	40(90*)	40(90*)	40(90*)
	Height Difference Between IDUs	m	30	30	30	30	30
	Max. Piping Length	m	1000	1000	1000	1000	1000
Operation Range*2	Cooling	DB	-5℃~54℃	-5℃~54℃	-5℃~54℃	-5℃~54℃	-5℃~54℃
	Heating	WB	-21℃~16.5℃	-21℃~16.5℃	-21℃~16.5℃	-21℃~16.5℃	-21℃~16.5℃

Notes:

1. Rated capacity is tested in the following conditions:
Pipe length: 7.5m, Pipe height difference: 0m; Cooling operation: indoor air inlet temperature 27℃ DB 19℃ WB, outdoor ambient temperature 35℃ DB; Heating operation: indoor air inlet temperature 20℃ DB, outdoor ambient temperature 7℃ DB 6℃ WB.

2. The above noise values are measured in the anechoic chamber without reflected echo. Measurement point: 1 meter from the service cover surface and 1.5 meters from floor level.

*1: For height difference between ODU & IDU more than 50(40)m, please contact with our professional engineer.

*2: When the operation temperature is under 48℃ DB ~ 54℃ DB, the system may be in intermittent operation. Please contact with our professional engineer.

Hi-FLEXi X3 Series



HP		20HP	22HP	24HP	26HP	28HP
Model		AVWT-190HKFXE	AVWT-212HKFXE	AVWT-232HKFXE	AVWT-250HKFXE	AVWT-272HKFXE
Model	Modules	—	—	—	—	—
	Power Supply	AC 3Φ, 380~415V/50Hz, 380V/60Hz				
Cooling	Capacity	kW	56.0	61.5	68.0	80.0
		kBtu/h	191.1	209.8	232.0	273.0
	Power Input	kW	17.13	18.96	21.05	22.78
	EER	kW/kW	3.27	3.24	3.23	3.23
Heating	Capacity	kW	63.0	69.0	75.0	82.5
		kBtu/h	215.0	235.4	255.9	281.5
	Power Input	kW	16.56	18.25	19.84	22.14
	COP	kW/kW	3.80	3.78	3.78	3.73
Ventilation	Air Flow Rate	m³/min	267	296	296	350
	Fan Quantity		2	2	2	2
	Static Pressure	Pa	110	110	110	110
Sound Pressure Level	Normal Mode	dB(A)	62	63	63	64
	Night Shift Mode	dB(A)	47	48	48	49
Compressor	Type	—	Twin Rotary			
	Compressor Quantity	pcs	2	2	2	2
Refrigerant	Type	—	R410A			
	Pre-charged Quantity	kg	10.9	11.4	11.4	11.4
Weight	Net Weight	kg	332	348	349	358
	Gross Weight	kg	357	372	373	392
Dimensions	External(HxWxD)	mm	1730x1350x750	1730x1350x750	1730x1350x750	1730x1600x750
	Packing(HxWxD)	mm	1950x1420x790	1950x1420x790	1950x1420x790	1950x1665x790
Cabinet Color			Ivory White	Ivory White	Ivory White	Ivory White
Ref. Piping	Gas	mm	Φ28.60	Φ28.60	Φ28.60	Φ31.75
		inch	1-1/8	1-1/8	1-1/8	1-1/4
	Liquid	mm	Φ15.88	Φ15.88	Φ15.88	Φ19.05
		inch	5/8	5/8	5/8	3/4
Connectable Indoor Units	Quantity	pcs	33	36	40	43
	Total Capacity	—	50%~150%	50%~150%	50%~150%	50%~150%
Piping Design	Height Difference Between ODU and IDU	m(above)	50(90*)	50(90*)	50(90*)	50(90*)
		m(below)	40(90*)	40(90*)	40(90*)	40(90*)
	Height Difference Between IDUs	m	30	30	30	30
	Max. Piping Length	m	1000	1000	1000	1000
Operation Range*2	Cooling	DB	-5℃~54℃	-5℃~54℃	-5℃~54℃	-5℃~54℃
	Heating	WB	-21℃~16.5℃	-21℃~16.5℃	-21℃~16.5℃	-21℃~16.5℃

Notes:

1. Rated capacity is tested in the following conditions:
Pipe length: 7.5m, Pipe height difference: 0m; Cooling operation: indoor air inlet temperature 27℃ DB 19℃ WB, outdoor ambient temperature 35℃ DB; Heating operation: indoor air inlet temperature 20℃ DB, outdoor ambient temperature 7℃ DB 6℃ WB.

2. The above noise values are measured in the anechoic chamber without reflected echo. Measurement point: 1 meter from the service cover surface and 1.5 meters from floor level.

*1: For height difference between ODU & IDU more than 50(40)m, please contact with our professional engineer.

*2: When the operation temperature is under 48℃ DB ~ 54℃ DB, the system may be in intermittent operation. Please contact with our professional engineer.

Hi-FLEXi X3 Series



HP			30HP	32HP	34HP	36HP
Model	Model		AVWT-290HKFXE	AVWT-308HKFXE	AVWT-326HKFXE	AVWT-344HKFXE
	Modules		AVWT-154HKFXE AVWT-136HKFXE	AVWT-154HKFXE AVWT-154HKFXE	AVWT-190HKFXE AVWT-136HKFXE	AVWT-190HKFXE AVWT-154HKFXE
Power Supply			AC 3Φ, 380~415V/50Hz, 380V/60Hz			
Cooling	Capacity	kW	85.0	90.0	96.0	101.0
		kBtu/h	290.0	307.0	327.6	344.6
	Power Input	kW	24.4	26.2	28.5	30.2
	EER	kW/kW	3.48	3.44	3.37	3.34
Heating	Capacity	kW	95.0	100.0	108.0	113.0
		kBtu/h	324.1	341.2	368.5	385.6
	Power Input	kW	24.2	26.0	27.8	29.6
	COP	kW/kW	3.93	3.85	3.89	3.82
Ventilation	Air Flow Rate	m³/min	415	420	472	477
	Fan Quantity		4	4	4	4
	Static Pressure	Pa	110	110	110	110
Sound Pressure Level	Normal Mode	dB(A)	64	64	64	64
	Night Shift Mode	dB(A)	49	49	49	49
Compressor	Type	–	Twin Rotary			
	Compressor Quantity	pcs	2	2	3	3
Refrigerant	Type	–	R410A			
	Pre-charged Quantity	kg	16.2	16.2	19.0	19.0
Weight	Net Weight	kg	517	518	590	591
	Gross Weight	kg	557	558	635	636
Dimensions	External(HxWxD)	mm	1730x (1210+1210) x750	1730x (1210+1210) x750	1730x (1210+1350) x750	1730x (1210+1350) x750
	Packing(HxWxD)	mm	1950x (1275+1275) x790	1950x (1275+1275) x790	1950x (1275+1420) x790	1950x (1275+1420) x790
Cabinet Color			Ivory White	Ivory White	Ivory White	Ivory White
Ref. Piping	Gas	mm	Φ31.75	Φ31.75	Φ38.10	Φ38.10
		inch	1-1/4	1-1/4	1-1/2	1-1/2
	Liquid	mm	Φ19.05	Φ19.05	Φ19.05	Φ19.05
		inch	3/4	3/4	3/4	3/4
Connectable Indoor Units	Quantity	pcs	50	53	56	59
	Total Capacity	–	50%~150%	50%~150%	50%~150%	50%~150%
Piping Design	Height Difference Between ODU and IDU	m(above)	50(90**)	50(90**)	50(90**)	50(90**)
		m(below)	40(90**)	40(90**)	40(90**)	40(90**)
	Height Difference Between IDUs	m	30	30	30	30
	Max. Piping Length	m	1000	1000	1000	1000
Operation Range*2	Cooling	DB	-5℃~54℃	-5℃~54℃	-5℃~54℃	-5℃~54℃
	Heating	WB	-21℃~16.5℃	-21℃~16.5℃	-21℃~16.5℃	-21℃~16.5℃

Notes:
1. Rated capacity is tested in the following conditions:
Pipe length: 7.5m, Pipe height difference: 0m; Cooling operation: indoor air inlet temperature 27℃ DB 19℃ WB, outdoor ambient temperature 35℃ DB; Heating operation: indoor air inlet temperature 20℃ DB, outdoor ambient temperature 7℃ DB 6℃ WB.
2. The above noise values are measured in the anechoic chamber without reflected echo. Measurement point: 1 meter from the service cover surface and 1.5 meters from floor level.
*: For height difference between ODU & IDU more than 50(40)m, please contact with our professional engineer.
?: When the operation temperature is under 48℃ DB ~ 54℃ DB, the system may be in intermittent operation. Please contact with our professional engineer.

Hi-FLEXi X3 Series



HP			38HP	40HP	42HP	44HP	46HP
Model	Model		AVWT-366HKFXE	AVWT-386HKFXE	AVWT-402HKFXE	AVWT-422HKFXE	AVWT-444HKFXE
	Modules		AVWT-212HKFXE AVWT-154HKFXE	AVWT-232HKFXE AVWT-154HKFXE	AVWT-212HKFXE AVWT-190HKFXE	AVWT-232HKFXE AVWT-190HKFXE	AVWT-232HKFXE AVWT-212HKFXE
Power Supply			AC 3Φ, 380~415V/50Hz, 380V/60Hz				
Cooling	Capacity	kW	106.5	113.0	117.5	124.0	129.5
		kBtu/h	363.3	385.5	401	423	442
	Power Input	kW	32.1	34.2	36.1	38.2	40.0
	EER	kW/kW	3.32	3.31	3.26	3.25	3.24
Heating	Capacity	kW	119.0	125.0	132.0	138.0	144.0
		kBtu/h	406.0	426.5	450.4	470.9	491.3
	Power Input	kW	31.2	32.8	34.8	36.4	38.1
	COP	kW/kW	3.81	3.81	3.79	3.79	3.78
Ventilation	Air Flow Rate	m³/min	506	506	563	563	592
	Fan Quantity		4	4	4	4	4
	Static Pressure	Pa	110	110	110	110	110
Sound Pressure Level	Normal Mode	dB(A)	65	65	65	66	66
	Night Shift Mode	dB(A)	50	50	50	51	51
Compressor	Type	–	Twin Rotary				
	Compressor Quantity	pcs	3	3	4	4	4
Refrigerant	Type	–	R410A				
	Pre-charged Quantity	kg	19.5	19.5	22.3	22.3	22.8
Weight	Net Weight	kg	607	608	680	681	697
	Gross Weight	kg	651	652	729	730	745
Dimensions	External(HxWxD)	mm	1730x (1210+1350) x750	1730x (1210+1350) x750	1730x (1350+1350) x750	1730x (1350+1350) x750	1730x (1350+1350) x750
	Packing(HxWxD)	mm	1950x (1275+1420) x790	1950x (1275+1420) x790	1950x (1420+1420) x790	1950x (1420+1420) x790	1950x (1420+1420) x790
Cabinet Color			Ivory White	Ivory White	Ivory White	Ivory White	Ivory White
Ref. Piping	Gas	mm	Φ38.10	Φ38.10	Φ38.10	Φ38.10	Φ41.30
		inch	1-1/2	1-1/2	1-1/2	1-1/2	1-5/8
	Liquid	mm	Φ19.05	Φ19.05	Φ19.05	Φ19.05	Φ22.20
		inch	3/4	3/4	3/4	3/4	7/8
Connectable Indoor Units	Quantity	pcs	64	64	64	64	64
	Total Capacity	–	50%~150%	50%~150%	50%~150%	50%~150%	50%~150%
Piping Design	Height Difference Between ODU and IDU	m(above)	50(90**)	50(90**)	50(90**)	50(90**)	50(90**)
		m(below)	40(90**)	40(90**)	40(90**)	40(90**)	40(90**)
	Height Difference Between IDUs	m	30	30	30	30	30
	Max. Piping Length	m	1000	1000	1000	1000	1000
Operation Range*2	Cooling	DB	-5℃~54℃	-5℃~54℃	-5℃~54℃	-5℃~54℃	-5℃~54℃
	Heating	WB	-21℃~16.5℃	-21℃~16.5℃	-21℃~16.5℃	-21℃~16.5℃	-21℃~16.5℃

Notes:
1. Rated capacity is tested in the following conditions:
Pipe length: 7.5m, Pipe height difference: 0m; Cooling operation: indoor air inlet temperature 27℃ DB 19℃ WB, outdoor ambient temperature 35℃ DB; Heating operation: indoor air inlet temperature 20℃ DB, outdoor ambient temperature 7℃ DB 6℃ WB.
2. The above noise values are measured in the anechoic chamber without reflected echo. Measurement point: 1 meter from the service cover surface and 1.5 meters from floor level.
*: For height difference between ODU & IDU more than 50(40)m, please contact with our professional engineer.
?: When the operation temperature is under 48℃ DB ~ 54℃ DB, the system may be in intermittent operation. Please contact with our professional engineer.

Hi-FLEXi X3 Series



HP			48HP	50HP	52HP	54HP	56HP
Model	Model		AVWT-464HKFXE	AVWT-482HKFXE	AVWT-504HKFXE	AVWT-522HKFXE	AVWT-544HKFXE
	Modules		AVWT-232HKFXE AVWT-232HKFXE	AVWT-250HKFXE AVWT-232HKFXE	AVWT-272HKFXE AVWT-232HKFXE	AVWT-272HKFXE AVWT-250HKFXE	AVWT-272HKFXE AVWT-272HKFXE
Power Supply			AC 3Φ, 380~415V/50Hz, 380V/60Hz				
Cooling	Capacity	kW	136.0	141.5	148.0	153.5	160.0
		kBtu/h	464	483	505	524	546
	Power Input	kW	42.1	43.8	46.1	47.8	50.1
	EER	kW/kW	3.23	3.23	3.21	3.21	3.20
Heating	Capacity	kW	150.0	157.5	162.5	170.0	175.0
		kBtu/h	511.8	537.4	554.5	580.1	597.2
	Power Input	kW	39.7	42.0	43.7	46.0	47.7
	COP	kW/kW	3.78	3.75	3.72	3.69	3.67
Ventilation	Air Flow Rate	m³/min	592	646	646	700	700
	Fan Quantity		4	4	4	4	4
	Static Pressure	Pa	110	110	110	110	110
Sound Pressure Level	Normal Mode	dB(A)	66	67	67	67	67
	Night Shift Mode	dB(A)	51	52	52	52	52
Compressor	Type	–	Twin Rotary				
	Compressor Quantity	pcs	4	4	4	4	4
Refrigerant	Type	–	R410A				
	Pre-charged Quantity	kg	22.8	22.8	22.8	22.8	22.8
Weight	Net Weight	kg	698	707	718	727	738
	Gross Weight	kg	746	765	766	785	786
Dimensions	External(HxWxD)	mm	1730x (1350+1350) x750	1730x (1350+1600) x750	1730x (1350+1600) x750	1730x (1600+1600) x750	1730x (1600+1600) x750
	Packing(HxWxD)	mm	1950x (1420+1420) x790	1950x (1420+1665) x790	1950x (1420+1665) x790	1950x (1665+1665) x790	1950x (1665+1665) x790
Cabinet Color			Ivory White	Ivory White	Ivory White	Ivory White	Ivory White
Ref. Piping	Gas	mm	Φ41.3	Φ41.3	Φ41.3	Φ41.3	Φ41.3
		inch	1-5/8	1-5/8	1-5/8	1-5/8	1-5/8
	Liquid	mm	Φ22.2	Φ22.2	Φ22.2	Φ22.2	Φ22.2
		inch	7/8	7/8	7/8	7/8	7/8
Connectable Indoor Units	Quantity	pcs	64	64	64	64	64
	Total Capacity	–	50%~150%	50%~150%	50%~150%	50%~150%	50%~150%
Piping Design	Height Difference Between ODU and IDU	m(above)	50(90*)	50(90*)	50(90*)	50(90*)	50(90*)
		m(below)	40(90*)	40(90*)	40(90*)	40(90*)	40(90*)
	Height Difference Between IDUs	m	30	30	30	30	30
	Max. Piping Length	m	1000	1000	1000	1000	1000
Operation Range*2	Cooling	DB	-5℃~54℃	-5℃~54℃	-5℃~54℃	-5℃~54℃	-5℃~54℃
	Heating	WB	-21℃~16.5℃	-21℃~16.5℃	-21℃~16.5℃	-21℃~16.5℃	-21℃~16.5℃

Notes:

1. Rated capacity is tested in the following conditions:
Pipe length: 7.5m, Pipe height difference: 0m; Cooling operation: indoor air inlet temperature 27℃ DB 19℃ WB, outdoor ambient temperature 35℃ DB; Heating operation: indoor air inlet temperature 20℃ DB, outdoor ambient temperature 7℃ DB 6℃ WB.

2. The above noise values are measured in the anechoic chamber without reflected echo. Measurement point: 1 meter from the service cover surface and 1.5 meters from floor level.

*1: For height difference between ODU & IDU more than 50(40)m, please contact with our professional engineer.

*2: When the operation temperature is under 48℃ DB ~ 54℃ DB, the system may be in intermittent operation. Please contact with our professional engineer.

Hi-FLEXi X3 Series



HP			58HP	60HP	62HP	64HP
Model	Model		AVWT-556HKFXE	AVWT-576HKFXE	AVWT-598HKFXE	AVWT-618HKFXE
	Modules		AVWT-212HKFXE AVWT-190HKFXE AVWT-154HKFXE	AVWT-232HKFXE AVWT-190HKFXE AVWT-154HKFXE	AVWT-232HKFXE AVWT-212HKFXE AVWT-154HKFXE	AVWT-232HKFXE AVWT-232HKFXE AVWT-154HKFXE
Power Supply			AC 3Φ, 380~415V/50Hz, 380V/60Hz			
Cooling	Capacity	kW	162.5	169.0	174.5	181.0
		kBtu/h	554.4	576.6	595.3	617.5
	Power Input	kW	49.2	51.3	53.1	55.2
	EER	kW/kW	3.30	3.30	3.29	3.28
Heating	Capacity	kW	182.0	188.0	194.0	200.0
		kBtu/h	621.0	641.5	661.9	682.4
	Power Input	kW	47.8	49.4	51.1	52.7
	COP	kW/kW	3.81	3.81	3.80	3.80
Ventilation	Air Flow Rate	m³/min	773	773	802	802
	Fan Quantity		6	6	6	6
	Static Pressure	Pa	110	110	110	110
Sound Pressure Level	Normal Mode	dB(A)	67	67	67	67
	Night Shift Mode	dB(A)	52	52	52	52
Compressor	Type	–	Twin Rotary			
	Compressor Quantity	pcs	5	5	5	5
Refrigerant	Type	–	R410A			
	Pre-charged Quantity	kg	30.4	30.4	30.9	30.9
Weight	Net Weight	kg	939	940	956	957
	Gross Weight	kg	1008	1009	1024	1025
Dimensions	External(HxWxD)	mm	1730x (1210+1350+1350) x750	1730x (1210+1350+1350) x750	1730x (1210+1350+1350) x750	1730x (1210+1350+1350) x750
	Packing(HxWxD)	mm	1950x (1275+1420+1420) x790	1950x (1275+1420+1420) x790	1950x (1275+1420+1420) x790	1950x (1275+1420+1420) x790
Cabinet Color			Ivory White	Ivory White	Ivory White	Ivory White
Ref. Piping	Gas	mm	Φ44.5	Φ44.5	Φ44.5	Φ44.5
		inch	1-3/4	1-3/4	1-3/4	1-3/4
	Liquid	mm	Φ22.2	Φ22.2	Φ22.2	Φ22.2
		inch	7/8	7/8	7/8	7/8
Connectable Indoor Units	Quantity	pcs	64	64	64	64
	Total Capacity	–	50%~150%	50%~150%	50%~150%	50%~150%
Piping Design	Height Difference Between ODU and IDU	m(above)	50(90*)	50(90*)	50(90*)	50(90*)
		m(below)	40(90*)	40(90*)	40(90*)	40(90*)
	Height Difference Between IDUs	m	30	30	30	30
	Max. Piping Length	m	1000	1000	1000	1000
Operation Range*2	Cooling	DB	-5℃~54℃	-5℃~54℃	-5℃~54℃	-5℃~54℃
	Heating	WB	-21℃~16.5℃	-21℃~16.5℃	-21℃~16.5℃	-21℃~16.5℃

Notes:

1. Rated capacity is tested in the following conditions:
Pipe length: 7.5m, Pipe height difference: 0m; Cooling operation: indoor air inlet temperature 27℃ DB 19℃ WB, outdoor ambient temperature 35℃ DB; Heating operation: indoor air inlet temperature 20℃ DB, outdoor ambient temperature 7℃ DB 6℃ WB.

2. The above noise values are measured in the anechoic chamber without reflected echo. Measurement point: 1 meter from the service cover surface and 1.5 meters from floor level.

*1: For height difference between ODU & IDU more than 50(40)m, please contact with our professional engineer.

*2: When the operation temperature is under 48℃ DB ~ 54℃ DB, the system may be in intermittent operation. Please contact with our professional engineer.

Hi-FLEXi X3 Series



HP			66HP	68HP	70HP	72HP	74HP
Model	Model		AVWT-634HKFXE	AVWT-654HKFXE	AVWT-676HKFXE	AVWT-696HKFXE	AVWT-714HKFXE
	Modules		AVWT-232HKFXE	AVWT-232HKFXE	AVWT-232HKFXE	AVWT-232HKFXE	AVWT-250HKFXE
			AVWT-212HKFXE	AVWT-232HKFXE	AVWT-232HKFXE	AVWT-232HKFXE	AVWT-232HKFXE
			AVWT-190HKFXE	AVWT-190HKFXE	AVWT-212HKFXE	AVWT-232HKFXE	AVWT-232HKFXE
Power Supply		AC 3Φ, 380–415V/50Hz, 380V/60Hz					
Cooling	Capacity	kW	185.5	192.0	197.5	204.0	209.5
		kBtu/h	632.9	655.1	673.8	696.0	714.8
	Power Input	kW	57.1	59.2	61.1	63.2	64.9
	EER	kW/kW	3.25	3.24	3.23	3.23	3.23
Heating	Capacity	kW	207.0	213.0	219.0	225.0	232.5
		kBtu/h	706.3	726.8	747.2	767.7	793.3
	Power Input	kW	54.7	56.2	57.9	59.5	61.8
	COP	kW/kW	3.79	3.79	3.78	3.78	3.76
Ventilation	Air Flow Rate	m³/min	859	859	888	888	942
	Fan Quantity		6	6	6	6	6
	Static Pressure	Pa	110	110	110	110	110
Sound Pressure Level	Normal Mode	dB(A)	67	67	68	68	68
	Night Shift Mode	dB(A)	52	52	53	53	53
Compressor	Type	–	Twin Rotary				
	Compressor Quantity	pcs	6	6	6	6	6
Refrigerant	Type	–	R410A				
	Pre-charged Quantity	kg	33.7	33.7	34.2	34.2	34.2
Weight	Net Weight	kg	1029	1030	1046	1047	1056
	Gross Weight	kg	1102	1103	1118	1119	1138
Dimensions	External(HxWxD)	mm	1730x (1350+1350+1350) x750	1730x (1350+1350+1350) x750	1730x (1350+1350+1350) x750	1730x (1350+1350+1350) x750	1730x (1350+1350+1600) x750
	Packing(HxWxD)	mm	1950x (1420+1420+1420) x790	1950x (1420+1420+1420) x790	1950x (1420+1420+1420) x790	1950x (1420+1420+1420) x790	1950x (1420+1420+1665) x790
Cabinet Color			Ivory White	Ivory White	Ivory White	Ivory White	Ivory White
Ref. Piping	Gas	mm	Φ44.5	Φ50.8	Φ50.8	Φ50.8	Φ50.8
		inch	1–3/4	2	2	2	2
	Liquid	mm	Φ22.2	Φ25.4	Φ25.4	Φ25.4	Φ25.4
		inch	7/8	1	1	1	1
Connectable Indoor Units	Quantity	pcs	64	64	64	64	64
	Total Capacity	–	50%–150%	50%–150%	50%–150%	50%–150%	50%–150%
Piping Design	Height Difference Between ODU and IDU	m(above)	50(90*)	50(90*)	50(90*)	50(90*)	50(90*)
		m(below)	40(90*)	40(90*)	40(90*)	40(90*)	40(90*)
	Height Difference Between IDUs	m	30	30	30	30	30
	Max. Piping Length	m	1000	1000	1000	1000	1000
Operation Range*2	Cooling	DB	–5℃–54℃	–5℃–54℃	–5℃–54℃	–5℃–54℃	–5℃–54℃
	Heating	WB	–21℃–16.5℃	–21℃–16.5℃	–21℃–16.5℃	–21℃–16.5℃	–21℃–16.5℃

Notes:

1. Rated capacity is tested in the following conditions:
Pipe length: 7.5m, Pipe height difference: 0m; Cooling operation: indoor air inlet temperature 27℃ DB 19℃ WB, outdoor ambient temperature 35℃ DB; Heating operation: indoor air inlet temperature 20℃ DB, outdoor ambient temperature 7℃ DB 6℃ WB.

2. The above noise values are measured in the anechoic chamber without reflected echo. Measurement point: 1 meter from the service cover surface and 1.5 meters from floor level.

*1: For height difference between ODU & IDU more than 50(40)m, please contact with our professional engineer.

*2: When the operation temperature is under 48℃ DB ~ 54℃ DB, the system may be in intermittent operation. Please contact with our professional engineer.

Hi-FLEXi X3 Series



HP			76HP	78HP	80HP	82HP	84HP
Model	Model		AVWT-732HKFXE	AVWT-754HKFXE	AVWT-776HKFXE	AVWT-794HKFXE	AVWT-816HKFXE
	Modules		AVWT-250HKFXE AVWT-250HKFXE AVWT-232HKFXE	AVWT-272HKFXE AVWT-250HKFXE AVWT-232HKFXE	AVWT-272HKFXE AVWT-272HKFXE AVWT-232HKFXE	AVWT-272HKFXE AVWT-272HKFXE AVWT-250HKFXE	AVWT-272HKFXE AVWT-272HKFXE AVWT-272HKFXE
Power Supply			AC 3Φ, 380~415V/50Hz, 380V/60Hz				
Cooling	Capacity	kW	215.0	221.5	228.0	233.5	240.0
		kBtu/h	733.6	755.8	778.0	796.8	819.0
	Power Input	kW	66.6	68.9	71.1	72.8	75.1
	EER	kW/kW	3.23	3.22	3.21	3.21	3.20
Heating	Capacity	kW	240.0	245.0	250.0	257.5	262.5
		kBtu/h	818.9	836.0	853.1	878.7	895.8
	Power Input	kW	64.1	65.9	67.6	69.9	71.6
	COP	kW/kW	3.74	3.72	3.70	3.68	3.67
Ventilation	Air Flow Rate	m³/min	996	996	996	1050	1050
	Fan Quantity		6	6	6	6	6
	Static Pressure	Pa	110	110	110	110	110
Sound Pressure Level	Normal Mode	dB(A)	68	68	68	69	69
	Night Shift Mode	dB(A)	53	53	53	54	54
Compressor	Type	–	Twin Rotary				
	Compressor Quantity	pcs	6	6	6	6	6
Refrigerant	Type	–	R410A				
	Pre-charged Quantity	kg	34.2	34.2	34.2	34.2	34.2
Weight	Net Weight	kg	1065	1076	1087	1096	1107
	Gross Weight	kg	1157	1158	1159	1178	1179
Dimensions	External(HxWxD)	mm	1730x (1350+1600+1600) x750	1730x (1350+1600+1600) x750	1730x (1350+1600+1600) x750	1730x (1600+1600+1600) x750	1730x (1600+1600+1600) x750
	Packing(HxWxD)	mm	1950x (1420+1665+1665) x790	1950x (1420+1665+1665) x790	1950x (1420+1665+1665) x790	1950x (1665+1665+1665) x790	1950x (1665+1665+1665) x790
Cabinet Color			Ivory White	Ivory White	Ivory White	Ivory White	Ivory White
Ref. Piping	Gas	mm	Φ50.8	Φ50.8	Φ50.8	Φ50.8	Φ50.8
		inch	2	2	2	2	2
	Liquid	mm	Φ25.4	Φ25.4	Φ25.4	Φ25.4	Φ25.4
		inch	1	1	1	1	1
Connectable Indoor Units	Quantity	pcs	64	64	64	64	64
	Total Capacity	–	50%~150%	50%~150%	50%~150%	50%~150%	50%~150%
Piping Design	Height Difference Between ODU and IDU	m(above)	50(90*)	50(90*)	50(90*)	50(90*)	50(90*)
		m(below)	40(90*)	40(90*)	40(90*)	40(90*)	40(90*)
	Height Difference Between IDUs	m	30	30	30	30	30
		Max. Piping Length	m	1000	1000	1000	1000
Operation Range*2	Cooling	DB	–5℃~54℃	–5℃~54℃	–5℃~54℃	–5℃~54℃	–5℃~54℃
	Heating	WB	–21℃~16.5℃	–21℃~16.5℃	–21℃~16.5℃	–21℃~16.5℃	–21℃~16.5℃

Notes:

1. Rated capacity is tested in the following conditions:
Pipe length: 7.5m, Pipe height difference: 0m; Cooling operation: indoor air inlet temperature 27℃ DB 19℃ WB, outdoor ambient temperature 35℃ DB; Heating operation: indoor air inlet temperature 20℃ DB, outdoor ambient temperature 7℃ DB 6℃ WB.

2. The above noise values are measured in the anechoic chamber without reflected echo. Measurement point: 1 meter from the service cover surface and 1.5 meters from floor level.

*1: For height difference between ODU & IDU more than 50(40)m, please contact with our professional engineer.

*2: When the operation temperature is under 48℃ DB ~ 54℃ DB, the system may be in intermittent operation. Please contact with our professional engineer.

Hi-FLEXi X3 Series



HP			86HP	88HP	90HP	92HP
Model	Model		AVWT-824HKFXE	AVWT-844HKFXE	AVWT-866HKFXE	AVWT-886HKFXE
	Modules		AVWT-232HKFXE	AVWT-232HKFXE	AVWT-232HKFXE	AVWT-232HKFXE
			AVWT-212HKFXE	AVWT-232HKFXE	AVWT-232HKFXE	AVWT-232HKFXE
			AVWT-190HKFXE	AVWT-190HKFXE	AVWT-212HKFXE	AVWT-232HKFXE
			AVWT-190HKFXE	AVWT-190HKFXE	AVWT-190HKFXE	AVWT-190HKFXE
Power Supply		AC 3Φ, 380~415V/50Hz, 380V/60Hz				
Cooling	Capacity	kW	241.5	248.0	253.5	260.0
		kBtu/h	824.0	846.2	864.9	887.1
	Power Input	kW	74.3	76.4	78.2	80.3
	EER	kW/kW	3.25	3.25	3.24	3.24
Heating	Capacity	kW	270.0	276.0	282.0	288.0
		kBtu/h	921.3	941.8	962.2	982.7
	Power Input	kW	71.2	72.8	74.5	76.1
	COP	kW/kW	3.79	3.79	3.79	3.79
	Air Flow Rate	m³/min	1126	1126	1155	1155
	Fan Quantity		8	8	8	8
Ventilation	Static Pressure	Pa	110	110	110	110
	Normal Mode	dB(A)	69	69	69	69
Sound Pressure Level	Night Shift Mode	dB(A)	54	54	54	54
	Type	—	Twin Rotary			
Compressor	Compressor Quantity	pcs	8	8	8	8
	Type	—	R410A			
Refrigerant	Pre-charged Quantity	kg	44.6	44.6	45.1	45.1
	Net Weight	kg	1361	1362	1378	1379
Weight	Gross Weight	kg	1459	1460	1475	1476
	External(HxWxD)	mm	1730x (1350+1350+1350+1350) x750	1730x (1350+1350+1350+1350) x750	1730x (1350+1350+1350+1350) x750	1730x (1350+1350+1350+1350) x750
Packing(HxWxD)		mm	1950x (1420+1420+1420+1420) x790	1950x (1420+1420+1420+1420) x790	1950x (1420+1420+1420+1420) x790	1950x (1420+1420+1420+1420) x790
Cabinet Color			Ivory White	Ivory White	Ivory White	Ivory White
Ref. Piping	Gas	mm	Φ50.8	Φ50.8	Φ50.8	Φ50.8
		inch	2	2	2	2
	Liquid	mm	Φ25.4	Φ25.4	Φ25.4	Φ25.4
		inch	1	1	1	1
Connectable Indoor Units	Quantity	pcs	64	64	64	64
	Total Capacity	—	50%~150%	50%~150%	50%~150%	50%~150%
Piping Design	Height Difference Between ODU and IDU	m(above)	50(90**)	50(90**)	50(90**)	50(90**)
		m(below)	40(90**)	40(90**)	40(90**)	40(90**)
	Height Difference Between IDUs	m	30	30	30	30
	Max. Piping Length	m	1000	1000	1000	1000
Operation Range*2	Cooling	DB	-5℃~54℃	-5℃~54℃	-5℃~54℃	-5℃~54℃
	Heating	WB	-21℃~16.5℃	-21℃~16.5℃	-21℃~16.5℃	-21℃~16.5℃

Notes:

1. Rated capacity is tested in the following conditions:
Pipe length: 7.5m, Pipe height difference: 0m; Cooling operation: indoor air inlet temperature 27℃ DB 19℃ WB, outdoor ambient temperature 35℃ DB; Heating operation: indoor air inlet temperature 20℃ DB, outdoor ambient temperature 7℃ DB 6℃ WB.

2. The above noise values are measured in the anechoic chamber without reflected echo. Measurement point: 1 meter from the service cover surface and 1.5 meters from floor level.

*1: For height difference between ODU & IDU more than 50(40)m, please contact with our professional engineer.

*2: When the operation temperature is under 48℃ DB ~ 54℃ DB, the system may be in intermittent operation. Please contact with our professional engineer.

Hi-FLEXi X3 Series



HP			94HP	96HP	98HP	100HP	102HP
Model	Model		AVWT-908HKFXE	AVWT-928HKFXE	AVWT-946HKFXE	AVWT-968HKFXE	AVWT-986HKFXE
	Modules		AVWT-232HKFXE	AVWT-232HKFXE	AVWT-250HKFXE	AVWT-272HKFXE	AVWT-272HKFXE
			AVWT-232HKFXE	AVWT-232HKFXE	AVWT-232HKFXE	AVWT-232HKFXE	AVWT-250HKFXE
			AVWT-232HKFXE	AVWT-232HKFXE	AVWT-232HKFXE	AVWT-232HKFXE	AVWT-232HKFXE
			AVWT-212HKFXE	AVWT-232HKFXE	AVWT-232HKFXE	AVWT-232HKFXE	AVWT-232HKFXE
Power Supply		AC 3Φ, 380-415V/50Hz, 380V/60Hz					
Cooling	Capacity	kW	265.5	272.0	277.5	284.0	289.5
		kBtu/h	905.8	928.0	946.8	969.0	987.8
	Power Input	kW	82.1	84.2	85.9	88.2	89.9
	EER	kW/kW	3.23	3.23	3.23	3.22	3.22
Heating	Capacity	kW	294.0	300.0	307.5	312.5	320.0
		kBtu/h	1003.1	1023.6	1049.2	1066.3	1091.9
	Power Input	kW	77.8	79.4	81.7	83.4	85.7
	COP	kW/kW	3.78	3.78	3.77	3.75	3.73
Ventilation	Air Flow Rate	m³/min	1184	1184	1238	1238	1292
	Fan Quantity		8	8	8	8	8
	Static Pressure	Pa	110	110	110	110	110
Sound Pressure Level	Normal Mode	dB(A)	69	69	69	70	70
	Night Shift Mode	dB(A)	54	54	54	55	55
Compressor	Type	—	Twin Rotary				
	Compressor Quantity	pcs	8	8	8	8	8
Refrigerant	Type	—	R410A				
	Pre-charged Quantity	kg	45.6	45.6	45.6	45.6	45.6
Weight	Net Weight	kg	1395	1396	1405	1416	1425
	Gross Weight	kg	1491	1492	1511	1512	1531
Dimensions	External(HxWxD)	mm	1730x (1350+1350+1350+1350) x750	1730x (1350+1350+1350+1350) x750	1730x (1350+1350+1350+1600) x750	1730x (1350+1350+1350+1600) x750	1730x (1350+1350+1600+1600) x750
	Packing(HxWxD)	mm	1950x (1420+1420+1420+1420) x790	1950x (1420+1420+1420+1420) x790	1950x (1420+1420+1420+1665) x790	1950x (1420+1420+1420+1665) x790	1950x (1420+1420+1665+1665) x790
Cabinet Color			Ivory White	Ivory White	Ivory White	Ivory White	Ivory White
Ref. Piping	Gas	mm	Φ50.8	Φ50.8	Φ50.8	Φ50.8	Φ50.8
		inch	2	2	2	2	2
	Liquid	mm	Φ25.4	Φ25.4	Φ25.4	Φ25.4	Φ25.4
		inch	1	1	1	1	1
Connectable Indoor Units	Quantity	pcs	64	64	64	64	64
	Total Capacity	—	50%~150%	50%~150%	50%~150%	50%~150%	50%~150%
Piping Design	Height Difference Between ODU and IDU	m(above)	50(90**)	50(90**)	50(90**)	50(90**)	50(90**)
		m(below)	40(90**)	40(90**)	40(90**)	40(90**)	40(90**)
	Height Difference Between IDUs	m	30	30	30	30	30
	Max. Piping Length	m	1000	1000	1000	1000	1000
Operation Range*2	Cooling	DB	-5℃-54℃	-5℃-54℃	-5℃-54℃	-5℃-54℃	-5℃-54℃
	Heating	WB	-21℃-16.5℃	-21℃-16.5℃	-21℃-16.5℃	-21℃-16.5℃	-21℃-16.5℃

Notes:

1. Rated capacity is tested in the following conditions:
Pipe length: 7.5m, Pipe height difference: 0m; Cooling operation: indoor air inlet temperature 27℃ DB 19℃ WB, outdoor ambient temperature 35℃ DB; Heating operation: indoor air inlet temperature 20℃DB, outdoor ambient temperature 7℃ DB 6℃ WB.

2. The above noise values are measured in the anechoic chamber without reflected echo. Measurement point: 1 meter from the service cover surface and 1.5 meters from floor level.

*1: For height difference between ODU & IDU more than 50(40)m, please contact with our professional engineer.

*2: When the operation temperature is under 48℃ DB ~ 54℃ DB, the system may be in intermittent operation. Please contact with our professional engineer.

Hi-FLEXi X3 Series





HP			104HP	106HP	108HP	110HP	112HP
Model	Model		AVWT-1008HKFXE	AVWT-1026HKFXE	AVWT-1048HKFXE	AVWT-1066HKFXE	AVWT-1088HKFXE
	Modules		AVWT-272HKFXE	AVWT-272HKFXE	AVWT-272HKFXE	AVWT-272HKFXE	AVWT-272HKFXE
			AVWT-272HKFXE	AVWT-272HKFXE	AVWT-272HKFXE	AVWT-272HKFXE	AVWT-272HKFXE
			AVWT-232HKFXE	AVWT-250HKFXE	AVWT-272HKFXE	AVWT-272HKFXE	AVWT-272HKFXE
			AVWT-232HKFXE	AVWT-232HKFXE	AVWT-232HKFXE	AVWT-250HKFXE	AVWT-272HKFXE
Power Supply		AC 3Φ, 380~415V/50Hz, 380V/60Hz					
Cooling	Capacity	kW	296.0	301.5	308.0	313.5	320.0
		kBtu/h	1010.0	1028.8	1051.0	1069.8	1092.0
	Power Input	kW	92.2	93.9	96.1	97.9	100.1
	EER	kW/kW	3.21	3.21	3.20	3.20	3.20
Heating	Capacity	kW	325.0	332.5	337.5	345.0	350.0
		kBtu/h	1109.0	1134.6	1151.7	1177.3	1194.4
	Power Input	kW	87.4	89.7	91.5	93.8	95.5
	COP	kW/kW	3.72	3.71	3.69	3.68	3.67
Ventilation	Air Flow Rate	m³/min	1292	1346	1346	1400	1400
	Fan Quantity		8	8	8	8	8
	Static Pressure	Pa	110	110	110	110	110
Sound Pressure Level	Normal Mode	dB(A)	70	70	70	70	70
	Night Shift Mode	dB(A)	55	55	55	55	55
Compressor	Type	—	Twin Rotary				
	Compressor Quantity	pcs	8	8	8	8	8
Refrigerant	Type	—	R410A				
	Pre-charged Quantity	kg	45.6	45.6	45.6	45.6	45.6
Weight	Net Weight	kg	1436	1445	1456	1465	1476
	Gross Weight	kg	1532	1551	1552	1571	1572
Dimensions	External(HxWxD)	mm	1730x (1350+1350+1600+1600) x750	1730x (1350+1600+1600+1600) x750	1730x (1350+1600+1600+1600) x750	1730x (1600+1600+1600+1600) x750	1730x (1600+1600+1600+1600) x750
	Packing(HxWxD)	mm	1950x (1420+1420+1665+1665) x790	1950x (1420+1665+1665+1665) x790	1950x (1420+1665+1665+1665) x790	1950x (1665+1665+1665+1665) x790	1950x (1665+1665+1665+1665) x790
Cabinet Color			Ivory White	Ivory White	Ivory White	Ivory White	Ivory White
Ref. Piping	Gas	mm	Φ50.8	Φ50.8	Φ50.8	Φ50.8	Φ50.8
		inch	2	2	2	2	2
	Liquid	mm	Φ25.4	Φ25.4	Φ25.4	Φ25.4	Φ25.4
		inch	1	1	1	1	1
Connectable Indoor Units	Quantity	pcs	64	64	64	64	64
	Total Capacity	—	50%~150%	50%~150%	50%~150%	50%~150%	50%~150%
Piping Design	Height Difference Between ODU and IDU	m(above)	50(90**)	50(90**)	50(90**)	50(90**)	50(90**)
		m(below)	40(90**)	40(90**)	40(90**)	40(90**)	40(90**)
	Height Difference Between IDUs	m	30	30	30	30	30
	Max. Piping Length	m	1000	1000	1000	1000	1000
Operation Range*2	Cooling	DB	-5℃~54℃	-5℃~54℃	-5℃~54℃	-5℃~54℃	-5℃~54℃
	Heating	WB	-21℃~16.5℃	-21℃~16.5℃	-21℃~16.5℃	-21℃~16.5℃	-21℃~16.5℃

Notes:
1. Rated capacity is tested in the following conditions:
Pipe length: 7.5m, Pipe height difference: 0m; Cooling operation: indoor air inlet temperature 27℃ DB 19℃ WB, outdoor ambient temperature 35℃ DB; Heating operation: indoor air inlet temperature 20℃ DB, outdoor ambient temperature 7℃ DB 6℃ WB.
2. The above noise values are measured in the anechoic chamber without reflected echo. Measurement point: 1 meter from the service cover surface and 1.5 meters from floor level.
*: For height difference between ODU & IDU more than 50(40)m, please contact with our professional engineer.
?: When the operation temperature is under 48℃ DB ~ 54℃ DB, the system may be in intermittent operation. Please contact with our professional engineer.

Hi-FLEXi Series



Available for two-pipe Systems and three-pipe Systems

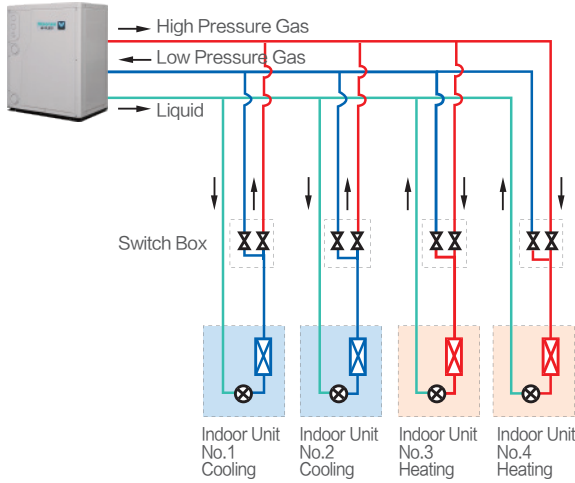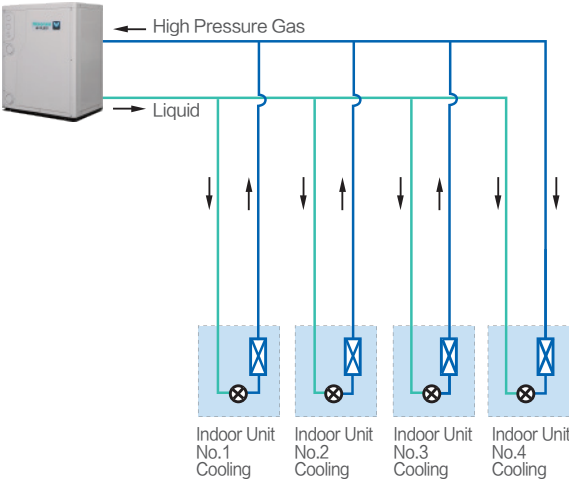

RELIABILITY

EFFICIENCY

COMFORT

FLEXIBILITY

OUTDOOR UNIT


INDOOR UNIT

CONTROL SYSTEM


ACCESSORY

2-stage Heat Recovery

1-stage Heat Recovery

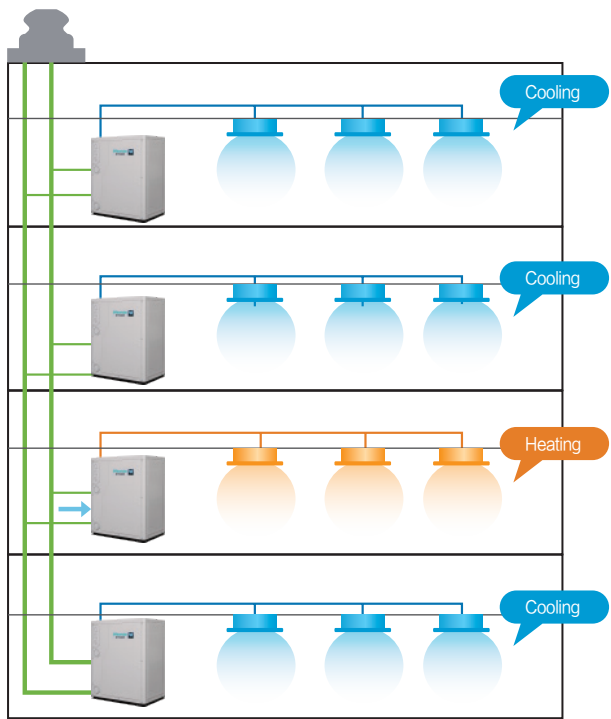


2-stage Heat Recovery

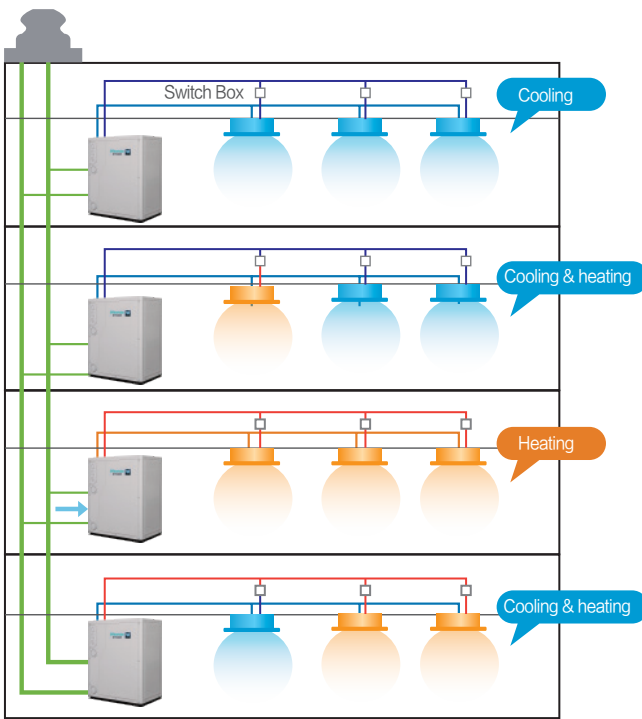

Patented 360° Fitted Refrigerant Cooling Technology



Patented 360° refrigerant cooling technology can help to remove the heat from the main PCB, inverter module and electrical box efficiently, which will greatly improve the reliability of the machine, especially in the high temperature ambient.

- A tin heat conductor is adopted between the refrigerant pipe and the heat sink to increase the heat transfer efficiency.
- The heat sink, made of aluminum alloy with high thermal conductivity, and the refrigerant tube are tightly combined through tube expander to improve heat exchange efficiency.

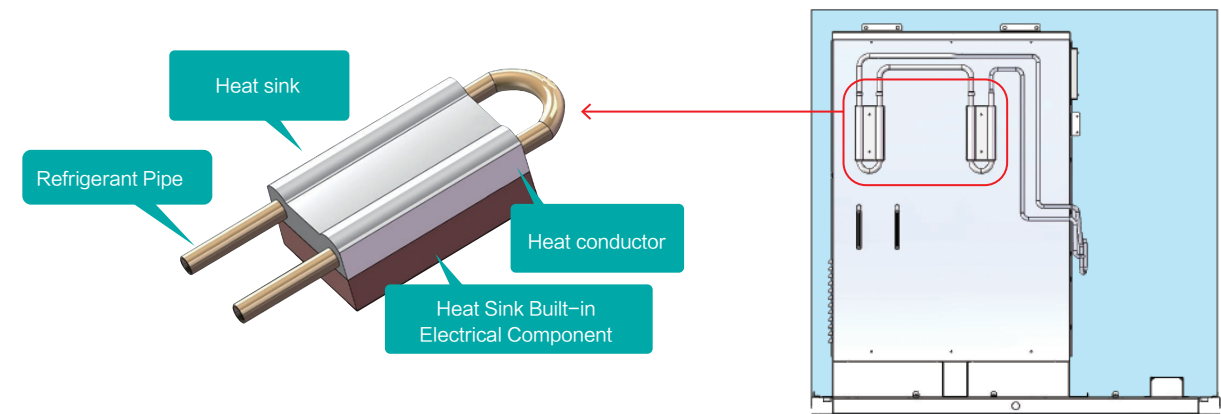

Convenient Installation


The electrical control box window is designed for service engineers to check issues of PCB conveniently. Especially for issues with a high voltage risk of electric shock, it can help engineers to avoid some risks.

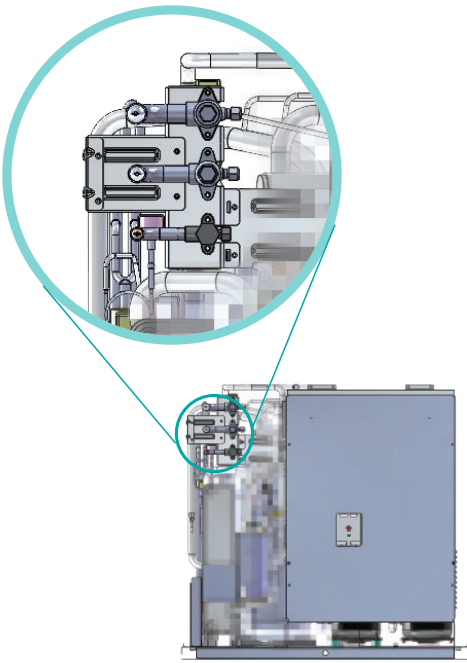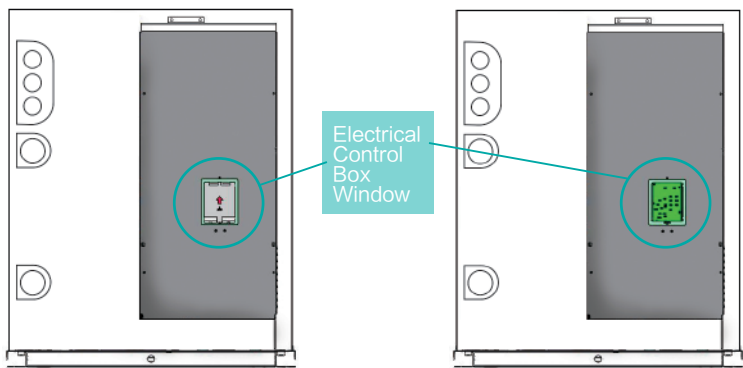

It is very convenient to install and save installation space because of the front outlet pipes.


Indoor Installation, not Affected by Weather Conditions

Indoor installation does not affect the facade of building, and avoids the poor heat dissipation problems which often encountered by many air-cooled outdoor units. Water-cooled efficiency is higher than air-cooled, making the system more energy efficient.

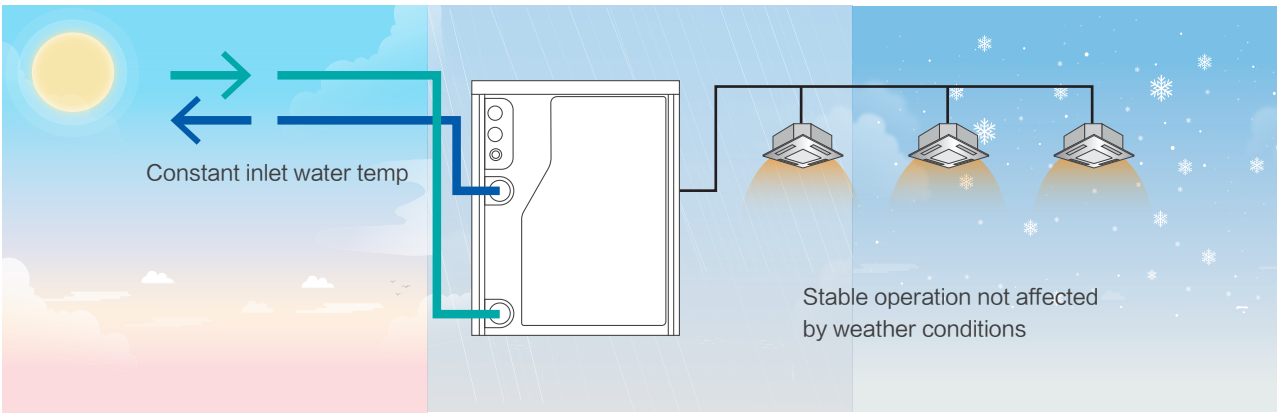


Continuous Heating without Defrosting Operation

Because the product is generally installed indoors, in heating mode, the cold energy is discharged to the outside through water, which avoids the defrosting problem of air-cooled products.

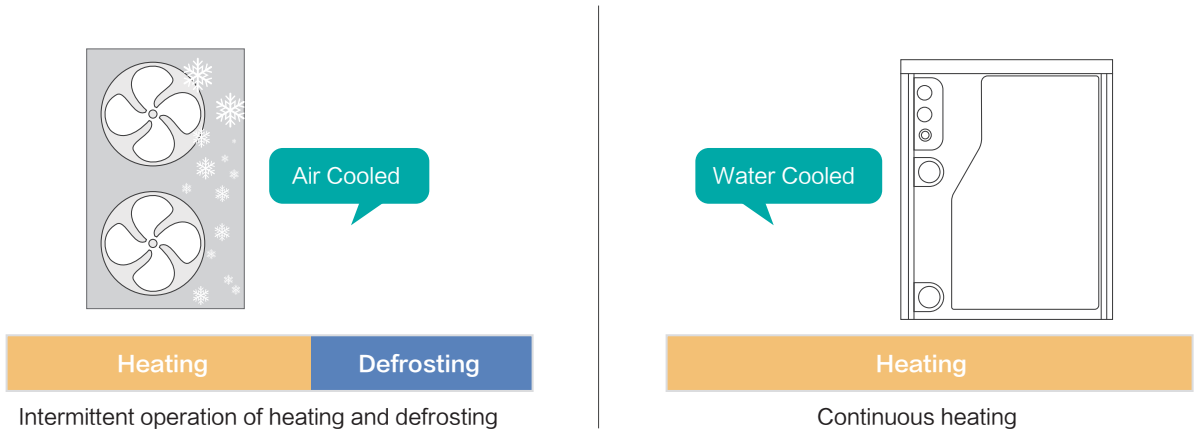

Piping Length


Excellent piping length allows flexible design and installation. As water pipes are not connected to indoor units, users are free from water leakage problems.

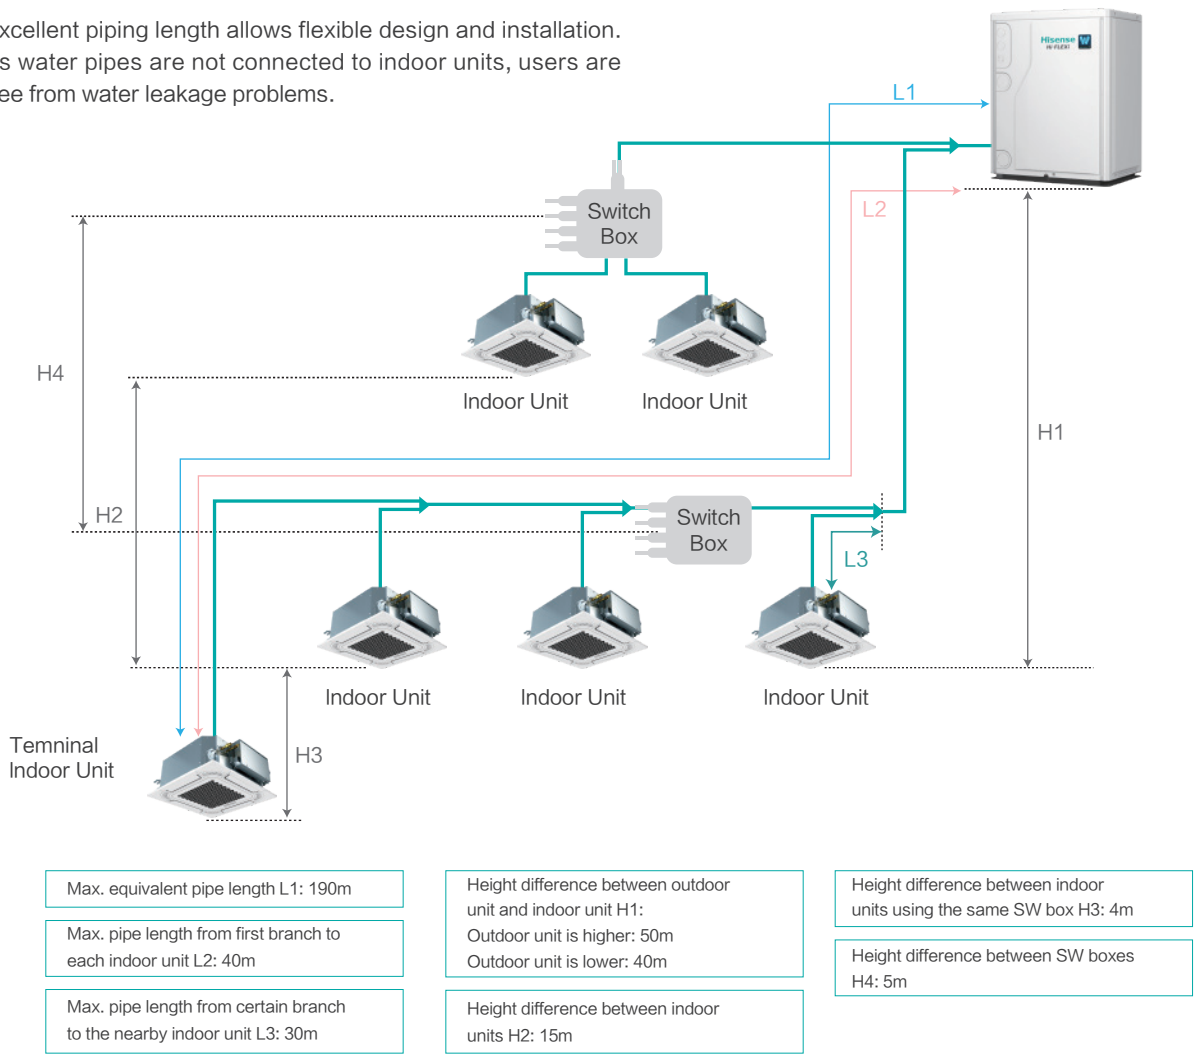

Multiple Applications

Building Water Loop System

Building water loop system is a common application. The circulating water is heated by boilers during heating mode, and is cooled by the cooling tower during cooling mode to maintain the temperature of the water cycling system.

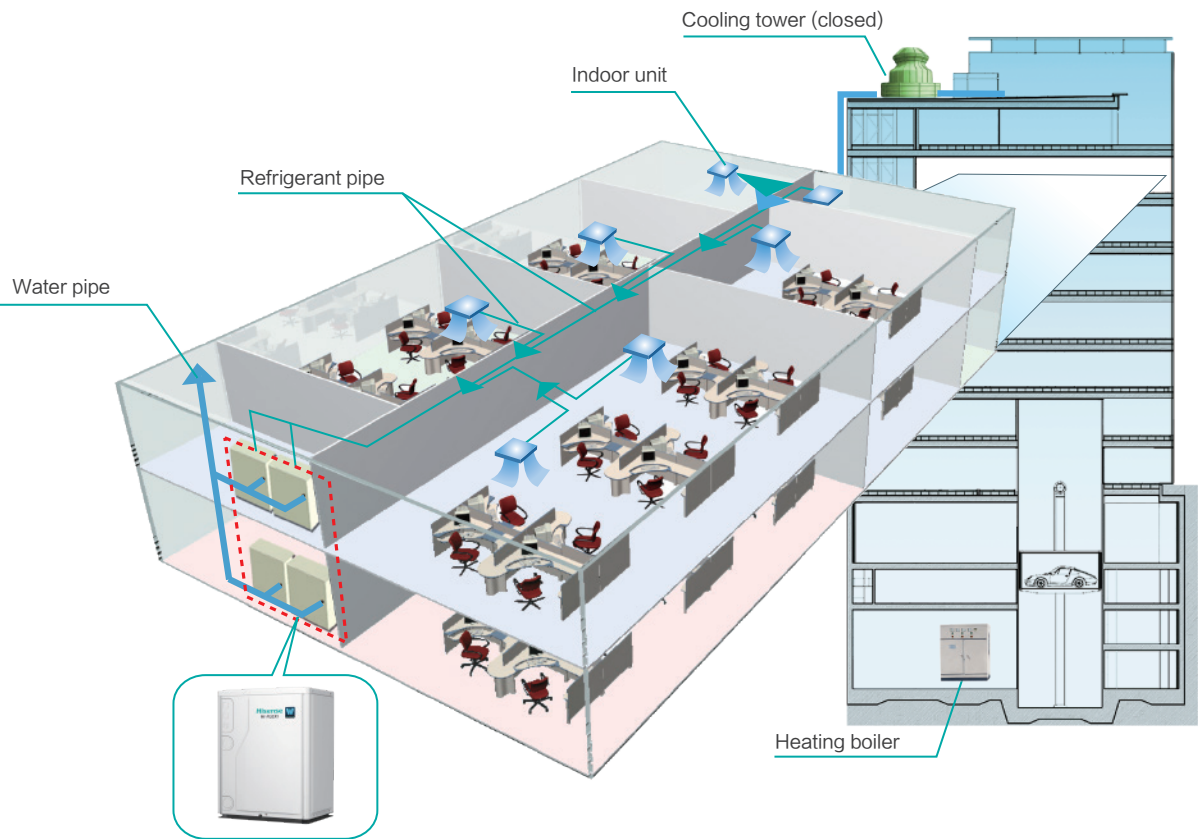

Others Applications

Uses underground heat sources like soil, surface water, underground water, seawater, lakes, rivers and more as renewable energy for cooling and heating. Water or antifreeze solution is circulated through the closed loop HDPE (High Density Poly-Ethylene) pipes buried beneath the earth's surface.



Hi-FLEXi W Series



HP			8HP	10HP	12HP	14HP
Model	Model		AVWW-76FKFW	AVWW-96FKFW	AVWW-114FKFW	AVWW-136FKFW
	Modules		—	—	—	—
Power Supply			AC 3 Φ, 380~415V/50/60Hz			
Cooling	Capacity	kW	22.4	28.0	33.5	40.0
		kBtu/h	76.5	95.6	114.3	136.5
	Power Input	kW	3.85	5.04	6.32	7.84
	EER	kW/kW	5.82	5.55	5.30	5.10
Heating	Capacity	kW	25.0	31.5	37.5	45.0
		kBtu/h	85.3	107.5	128.0	153.6
	Power Input	kW	4.08	5.25	6.45	8.03
	COP	kW/kW	6.12	6.00	5.81	5.60
Sound	Sound Pressure Level Cooling/Heating	dB(A)	49/51	51/53	53/54	55/57
	Water Temperature	℃	10~45	10~45	10~45	10~45
Water-side Heat Exchanger	Rated Water Flow Rate	L/min	76.7	96.0	115.0	138.3
	Water Pressure Drop	kPa	30	45	45	60
	Maximum Pressure Resistance	kgf/cm ²	20	20	20	20
Weight	Net Weight	kg	166	166	171	171
	Gross Weight	kg	170	170	175	175
Dimensions	External (H × W × D)	mm	1030 × 820 × 560	1030 × 820 × 560	1030 × 820 × 560	1030 × 820 × 560
	Packing(H × W × D)	mm	1180 × 900 × 632	1180 × 900 × 632	1180 × 900 × 632	1180 × 900 × 632
Ref. Piping	Liquid Pipe	mm	Φ9.53	Φ9.53	Φ12.70	Φ12.70
		inch	3/8	3/8	1/2	1/2
	Low Pressure Gas Pipe	mm	Φ19.05	Φ22.20	Φ25.40	Φ25.40
		inch	3/4	7/8	1	1
	High/Low Pressure Gas Pipe	mm	Φ15.88	Φ19.05	Φ22.20	Φ22.20
		inch	5/8	3/4	7/8	7/8
Water Connecting Pipes	Water Pipe		DN32	DN32	DN32	DN32
	Thread of Connector		G1-1/4B	G1-1/4B	G1-1/4B	G1-1/4B
	Drain Pipe	mm	Outer Diameter 18	Outer Diameter 18	Outer Diameter 18	Outer Diameter 18
MAX. Connectable Indoor Units	Recommended		12	15	18	21
	Max.		19	24	29	34

Notes:

1. Operation condition:
Cooling: indoor temperature 27℃ DB /19℃ WB, water inlet outlet 30/35℃.
Heating: indoor temperature 20℃ DB /15℃ WB, water inlet 20℃.

2. The sound pressure is based on the following conditions.
1 meter from the unit service cover surface, and 1.5 meters from floor level.
The above data was measured in an anechoic chamber so that reflected sound should be taken into consideration in the field.

3. When unit is operating out of the allowable water temperature range, it won't strat normally and will alarm.

4. For Max. pipe length more than 300m, please contact with our professional engineer.

Hi-FLEXi W Series



HP			16HP	18HP	20HP
Model	Model		AVWW-154FKFW	AVWW-170FKFW	AVWW-190FKFW
	Modules		—	—	—
Power Supply			AC 3 Φ, 380~415V/50/60Hz		
Cooling	Capacity	kW	45.0	50.0	56.0
		kBtu/h	153.6	170.6	191.1
	Power Input	kW	8.11	9.43	10.98
	EER	kW/kW	5.55	5.30	5.10
Heating	Capacity	kW	50.0	56.0	63.0
		kBtu/h	170.6	191.1	215.0
	Power Input	kW	8.33	9.62	10.86
	COP	kW/kW	6.00	5.82	5.80
Sound	Sound Pressure Level Cooling/Heating	dB(A)	51/52	53/53	53/55
	Water Temperature	℃	10~45	10~45	10~45
Water-side Heat Exchanger	Rated Water Flow Rate	L/min	153.3	166.7	193.3
	Water Pressure Drop	kPa	40	45	60
	Maximum Pressure Resistance	kgf/cm ²	20	20	20
Weight	Net Weight	kg	245	246	246
	Gross Weight	kg	250	251	251
Dimensions	External (H × W × D)	mm	1030 × 1040 × 560	1030 × 1040 × 560	1030 × 1040 × 560
	Packing(H × W × D)	mm	1180 × 1112 × 632	1180 × 1112 × 632	1180 × 1112 × 632
Ref. Piping	Liquid Pipe	mm	Φ12.70	Φ15.88	Φ15.88
		inch	1/2	5/8	5/8
	Low Pressure Gas Pipe	mm	Φ28.60	Φ28.60	Φ28.60
		inch	1-1/8	1-1/8	1-1/8
	High/Low Pressure Gas Pipe	mm	Φ22.20	Φ22.20	Φ22.20
		inch	7/8	7/8	7/8
Water Connecting Pipes	Water Pipe		DN32	DN32	DN32
	Thread of Connector		G1-1/4B	G1-1/4B	G1-1/4B
	Drain Pipe	mm	Outer Diameter 18	Outer Diameter 18	Outer Diameter 18
MAX. Connectable Indoor Units	Recommended		23	26	29
	Max.		39	43	48

Notes:

1. Operation condition:
Cooling: indoor temperature 27℃ DB /19℃ WB, water inlet outlet 30/35℃.
Heating: indoor temperature 20℃ DB /15℃ WB, water inlet 20℃.

2. The sound pressure is based on the following conditions.
1 meter from the unit service cover surface, and 1.5 meters from floor level.
The above data was measured in an anechoic chamber so that reflected sound should be taken into consideration in the field.

3. When unit is operating out of the allowable water temperature range, it won't strat normally and will alarm.

4. For Max. pipe length more than 300m, please contact with our professional engineer.

Hi-FLEXi W Series



HP			22HP	24HP	26HP	28HP	30HP
Model	Model		AVWW-210FKFW	AVWW-228FKFW	AVWW-250FKFW	AVWW-268FKFW	AVWW-286FKFW
	Modules		AVWW-96FKFW	AVWW-114FKFW	AVWW-114FKFW	AVWW-114FKFW	AVWW-96FKFW
			AVWW-114FKFW	AVWW-114FKFW	AVWW-136FKFW	AVWW-154FKFW	AVWW-190FKFW
Power Supply			AC 3Φ, 380-415V/50/60Hz				
Cooling	Capacity	kW	61.5	67.0	73.5	78.5	84.0
		kBtu/h	209.9	228.6	250.8	267.9	286.7
	Power Input	kW	11.4	12.6	14.2	14.4	16.0
	EER	kW/kW	5.41	5.30	5.19	5.44	5.24
Heating	Capacity	kW	69.0	75.0	82.5	87.5	94.5
		kBtu/h	235.4	255.9	281.6	298.6	322.4
	Power Input	kW	11.7	12.9	14.5	14.8	16.1
	COP	kW/kW	5.90	5.81	5.70	5.92	5.87
Sound	Sound Pressure Level Cooling/Heating	dB(A)	56/57	56/57	58/60	56/57	56/58
Water-side Heat Exchanger	Water Temperature	℃	10~45	10~45	10~45	10~45	10~45
	Rated Water Flow Rate	L/min	211.0	230.0	253.3	268.3	289.3
	Water Pressure Drop	kPa	/	/	/	/	/
Weight	Maximum Pressure Resistance	kgf/cm ²	20	20	20	20	20
	Net Weight	kg	337	342	342	416	412
	Gross Weight	kg	345	350	350	425	421
Dimensions	External (H×W×D)	mm	1030× (820+820)	1030× (820+820)	1030× (820+820)	1030× (820+1040)	1030× (820+1040)
			×560	×560	×560	×560	×560
	Packing(H×W×D)	mm	1180× (900+900)	1180× (900+900)	1180× (900+900)	1180× (900+1112)	1180× (900+1112)
Ref. Piping	Liquid Pipe	mm	Φ15.88	Φ15.88	Φ19.05	Φ19.05	Φ19.05
		inch	5/8	5/8	3/4	3/4	3/4
	Low Pressure Gas Pipe	mm	Φ28.60	Φ28.60	Φ31.75	Φ31.75	Φ31.75
		inch	1-1/8	1-1/8	1-1/4	1-1/4	1-1/4
	High/Low Pressure Gas Pipe	mm	Φ25.40	Φ25.40	Φ25.40	Φ28.60	Φ28.60
		inch	1	1	1	1-1/8	1-1/8
	Water Connecting Pipes	Water Pipe		DN32	DN32	DN32	DN32
Thread of Connector			G1-1/4B	G1-1/4B	G1-1/4B	G1-1/4B	G1-1/4B
Drain Pipe		mm	Outer Diameter 18	Outer Diameter 18	Outer Diameter 18	Outer Diameter 18	Outer Diameter 18
MAX. Connectable Indoor Units	Recommended		33	36	39	40	40
	Max.		53	58	63	64	64

- Notes:
1. Operation condition:
Cooling: indoor temperature 27℃ DB /19℃ WB, water inlet outlet 30/35℃.
Heating: indoor temperature 20℃ DB /15℃ WB, water inlet 20℃.
 2. The sound pressure is based on the following conditions.
1 meter from the unit service cover surface, and 1.5 meters from floor level.
The above data was measured in an anechoic chamber so that reflected sound should be taken into consideration in the field.
 3. When unit is operating out of the allowable water temperature range, it won't strat normally and will alarm.
 4. For Max. pipe length more than 300m, please contact with our professional engineer.

Hi-FLEXi W Series



HP			32HP	34HP	36HP	38HP	40HP
	Model		AVWW-304FKFW	AVWW-326FKFW	AVWW-344FKFW	AVWW-360FKFW	AVWW-380FKFW
Model	Modules		AVWW-114FKFW	AVWW-136FKFW	AVWW-154FKFW	AVWW-170FKFW	AVWW-190FKFW
			AVWW-190FKFW	AVWW-190FKFW	AVWW-190FKFW	AVWW-190FKFW	AVWW-190FKFW
Power Supply		AC 3Φ, 380-415V/50/60Hz					
Cooling	Capacity	kW	89.5	96.0	101.0	106.0	112.0
		kBtu/h	305.4	327.6	344.7	361.7	382.1
	Power Input	kW	17.3	18.8	19.1	20.4	22.0
	EER	kW/kW	5.17	5.10	5.29	5.19	5.10
Heating	Capacity	kW	100.5	108.0	113.0	119.0	126.0
		kBtu/h	342.9	368.6	385.6	406.0	429.9
	Power Input	kW	17.3	18.9	19.2	20.5	21.7
	COP	kW/kW	5.81	5.72	5.89	5.81	5.80
Sound	Sound Pressure Level Cooling/Heating	dB(A)	56/58	58/60	56/58	56/58	56/58
Water-side Heat Exchanger	Water Temperature	℃	10-45	10-45	10-45	10-45	10-45
	Rated Water Flow Rate	L/min	308.3	331.7	346.7	360.0	386.7
	Water Pressure Drop	kPa	/	/	/	/	/
Weight	Maximum Pressure Resistance	kgf/cm²	20	20	20	20	20
	Net Weight	kg	417	417	491	492	492
	Gross Weight	kg	426	426	501	502	502
Dimensions	External (H×W×D)	mm	1030× (820+1040) ×560	1030× (820+1040) ×560	1030× (1040+1040) ×560	1030× (1040+1040) ×560	1030× (1040+1040) ×560
	Packing(H×W×D)	mm	1180× (900+1112) ×632	1180× (900+1112) ×632	1180× (1112+1112) ×632	1180× (1112+1112) ×632	1180× (1112+1112) ×632
Ref. Piping	Liquid Pipe	mm	Φ19.05	Φ19.05	Φ19.05	Φ19.05	Φ19.05
		inch	3/4	3/4	3/4	3/4	3/4
	Low Pressure Gas Pipe	mm	Φ31.75	Φ31.75	Φ31.75	Φ38.10	Φ38.10
		inch	1-1/4	1-1/4	1-1/4	1-1/2	1-1/2
	High/Low Pressure Gas Pipe	mm	Φ28.60	Φ28.60	Φ28.60	Φ31.75	Φ31.75
		inch	1-1/8	1-1/8	1-1/8	1-1/4	1-1/4
Water Connecting Pipes	Water Pipe		DN32	DN32	DN32	DN32	DN32
	Thread of Connector		G1-1/4B	G1-1/4B	G1-1/4B	G1-1/4B	G1-1/4B
	Drain Pipe	mm	Outer Diameter 18	Outer Diameter 18	Outer Diameter 18	Outer Diameter 18	Outer Diameter 18
MAX. Connectable Indoor Units	Recommended		40	40	40	40	40
	Max.		64	64	64	64	64

- Notes:
1. Operation condition:
Cooling: indoor temperature 27℃ DB /19℃ WB, water inlet outlet 30/35℃.
Heating: indoor temperature 20℃ DB /15℃ WB, water inlet 20℃.
 2. The sound pressure is based on the following conditions.
1 meter from the unit service cover surface, and 1.5 meters from floor level.
The above data was measured in an anechoic chamber so that reflected sound should be taken into consideration in the field.
 3. When unit is operating out of the allowable water temperature range, it won't strat normally and will alarm.
 4. For Max. pipe length more than 300m, please contact with our professional engineer.

Hi-FLEXi W Series



HP			42HP	44HP	46HP	48HP	50HP
Model	Model		AVWW-400FKFW	AVWW-418FKFW	AVWW-440FKFW	AVWW-456FKFW	AVWW-476FKFW
	Modules		AVWW-96FKFW	AVWW-114FKFW	AVWW-96FKFW	AVWW-96FKFW	AVWW-96FKFW
			AVWW-114FKFW	AVWW-114FKFW	AVWW-154FKFW	AVWW-170FKFW	AVWW-190FKFW
			AVWW-190FKFW	AVWW-190FKFW	AVWW-190FKFW	AVWW-190FKFW	AVWW-190FKFW
Power Supply		AC 3Φ, 380-415V/50/60Hz					
Cooling	Capacity	kW	117.5	123.0	129.0	134.0	140.0
		kBtu/h	401.0	419.7	440.3	457.3	477.7
	Power Input	kW	22.3	23.6	24.1	25.5	27.0
	EER	kW/kW	5.26	5.21	5.35	5.27	5.19
Heating	Capacity	kW	132.0	138.0	144.5	150.5	157.5
		kBtu/h	450.4	470.9	493.0	513.5	537.4
	Power Input	kW	22.6	23.8	24.4	25.7	27.0
	COP	kW/kW	5.85	5.81	5.91	5.85	5.84
Sound	Sound Pressure Level Cooling/Heating	dB(A)	58/60	58/60	58/60	58/60	58/60
Water-side Heat Exchanger	Water Temperature	℃	10-45	10-45	10-45	10-45	10-45
	Rated Water Flow Rate	L/min	404.3	423.3	442.7	456.0	482.7
	Water Pressure Drop	kPa	/	/	/	/	/
	Maximum Pressure Resistance	kgf/cm²	20	20	20	20	20
Weight	Net Weight	kg	583	588	657	658	658
	Gross Weight	kg	596	601	671	672	672
Dimensions	External (H×W×D)	mm	1030× (820+820+1040) ×560	1030× (820+820+1040) ×560	1030× (820+1040+1040) ×560	1030× (820+1040+1040) ×560	1030× (820+1040+1040) ×560
		mm	1180× (900+900+1112) ×632	1180× (900+900+1112) ×632	1180× (900+1112+1112) ×632	1180× (900+1112+1112) ×632	1180× (900+1112+1112) ×632
	Packing(H×W×D)	mm	1180× (900+900+1112) ×632	1180× (900+900+1112) ×632	1180× (900+1112+1112) ×632	1180× (900+1112+1112) ×632	1180× (900+1112+1112) ×632
		mm	1180× (900+900+1112) ×632	1180× (900+900+1112) ×632	1180× (900+1112+1112) ×632	1180× (900+1112+1112) ×632	1180× (900+1112+1112) ×632
Ref. Piping	Liquid Pipe	mm	Φ19.05	Φ19.05	Φ19.05	Φ19.05	Φ19.05
		inch	3/4	3/4	3/4	3/4	3/4
	Low Pressure Gas Pipe	mm	Φ38.10	Φ38.10	Φ38.10	Φ38.10	Φ38.10
		inch	1-1/2	1-1/2	1-1/2	1-1/2	1-1/2
	High/Low Pressure Gas Pipe	mm	Φ31.75	Φ31.75	Φ31.75	Φ31.75	Φ31.75
		inch	1-1/4	1-1/4	1-1/4	1-1/4	1-1/4
Water Connecting Pipes	Water Pipe		DN32	DN32	DN32	DN32	DN32
	Thread of Connector		G1-1/4B	G1-1/4B	G1-1/4B	G1-1/4B	G1-1/4B
	Drain Pipe	mm	Outer Diameter 18	Outer Diameter 18	Outer Diameter 18	Outer Diameter 18	Outer Diameter 18
MAX. Connectable Indoor Units	Recommended		40	40	40	40	40
	Max.		64	64	64	64	64

- Notes:
1. Operation condition:
Cooling: indoor temperature 27℃ DB /19℃ WB, water inlet outlet 30/35℃.
Heating: indoor temperature 20℃ DB /15℃ WB, water inlet 20℃.
 2. The sound pressure is based on the following conditions.
1 meter from the unit service cover surface, and 1.5 meters from floor level.
The above data was measured in an anechoic chamber so that reflected sound should be taken into consideration in the field.
 3. When unit is operating out of the allowable water temperature range, it won't strat normally and will alarm.
 4. For Max. pipe length more than 300m, please contact with our professional engineer.

Hi-FLEXi W Series




HP			52HP	54HP	56HP	58HP	60HP
Model	Model		AVWW-494FKFW	AVWW-516FKFW	AVWW-534FKFW	AVWW-550FKFW	AVWW-570FKFW
	Modules		AVWW-114FKFW	AVWW-136FKFW	AVWW-154FKFW	AVWW-170FKFW	AVWW-190FKFW
			AVWW-190FKFW	AVWW-190FKFW	AVWW-190FKFW	AVWW-190FKFW	AVWW-190FKFW
			AVWW-190FKFW	AVWW-190FKFW	AVWW-190FKFW	AVWW-190FKFW	AVWW-190FKFW
Power Supply		AC 3Φ, 380-415V/50/60Hz					
Cooling	Capacity	kW	145.5	152.0	157.0	162.0	168.0
		kBtu/h	496.4	518.6	535.7	552.7	573.2
	Power Input	kW	28.3	29.8	30.1	31.4	32.9
	EER	kW/kW	5.14	5.10	5.22	5.16	5.10
Heating	Capacity	kW	163.5	171.0	176.0	182.0	189.0
		kBtu/h	557.9	583.5	600.5	621.0	644.9
	Power Input	kW	28.2	29.8	30.1	31.3	32.6
	COP	kW/kW	5.80	5.75	5.86	5.81	5.80
Sound	Sound Pressure Level Cooling/Heating	dB(A)	58/60	60/62	58/60	58/60	58/60
Water-side Heat Exchanger	Water Temperature	℃	10-45	10-45	10-45	10-45	10-45
	Rated Water Flow Rate	L/min	501.7	525.0	540.0	553.3	580.0
	Water Pressure Drop	kPa	/	/	/	/	/
Weight	Maximum Pressure Resistance	kgf/cm²	20	20	20	20	20
	Net Weight	kg	663	663	737	738	738
	Gross Weight	kg	677	677	752	753	753
Dimensions	External (H×W×D)	mm	1030× (820+1040+1040) ×560	1030× (820+1040+1040) ×560	1030× (1040+1040+1040) ×560	1030× (1040+1040+1040) ×560	1030× (1040+1040+1040) ×560
	Packing(H×W×D)	mm	1180× (900+1112+1112) ×632	1180× (900+1112+1112) ×632	1180× (1112+1112+1112) ×632	1180× (1112+1112+1112) ×632	1180× (1112+1112+1112) ×632
Ref. Piping	Liquid Pipe	mm	φ19.05	φ19.05	φ22.20	φ22.20	φ22.20
		inch	3/4	3/4	7/8	7/8	7/8
	Low Pressure Gas Pipe	mm	φ38.10	φ38.10	φ38.10	φ38.10	φ38.10
		inch	1-1/2	1-1/2	1-1/2	1-1/2	1-1/2
	High/Low Pressure Gas Pipe	mm	φ31.75	φ31.75	φ38.10	φ38.10	φ38.10
		inch	1-1/4	1-1/4	1-1/2	1-1/2	1-1/2
Water Connecting Pipes	Water Pipe		DN32	DN32	DN32	DN32	
	Thread of Connector		G1-1/4B	G1-1/4B	G1-1/4B	G1-1/4B	
	Drain Pipe	mm	Outer Diameter 18	Outer Diameter 18	Outer Diameter 18	Outer Diameter 18	Outer Diameter 18
MAX. Connectable Indoor Units	Recommended		40	40	40	40	
	Max.		64	64	64	64	

- Notes:
1. Operation condition:
Cooling: indoor temperature 27℃ DB /19℃ WB, water inlet outlet 30/35℃.
Heating: indoor temperature 20℃ DB /15℃ WB, water inlet 20℃.
 2. The sound pressure is based on the following conditions.
1 meter from the unit service cover surface, and 1.5 meters from floor level.
The above data was measured in an anechoic chamber so that reflected sound should be taken into consideration in the field.
 3. When unit is operating out of the allowable water temperature range, it won't strat normally and will alarm.
 4. For Max. pipe length more than 300m, please contact with our professional engineer.


Hi-Smart Series

High Efficiency

The outdoor unit features a new generation of wide-diameter fans, with the fan diameter increased from 544mm to 700mm (600mm for single-fan unit). This upgrade results in a 44% increase in airflow at the same rotational speed, enhancing energy efficiency at lower speeds and boosting cooling capacity at higher speeds. Additionally, the unit is equipped with a DC inverter motor that enables precise speed control, ensuring stable and efficient operation.

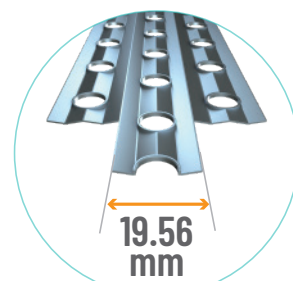

Advanced corrugated fin

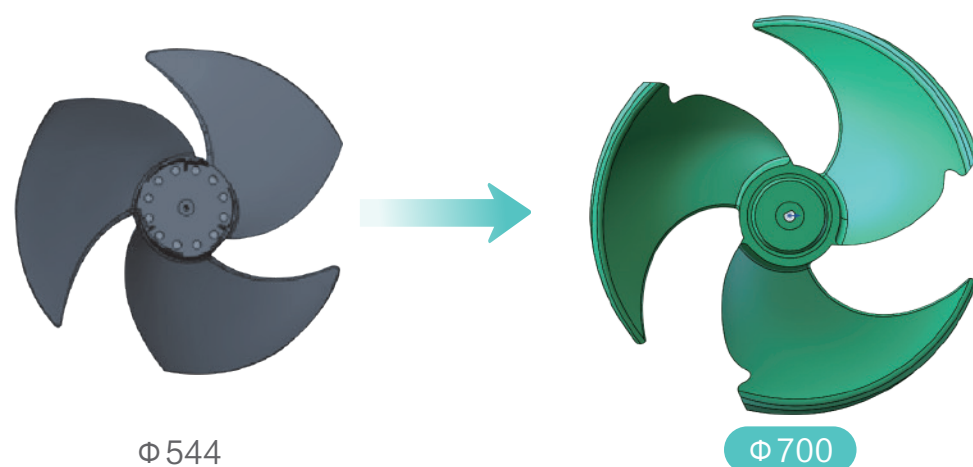

Eco-friendly R32 Refrigerant

R32 refrigerant contributes to meeting the F-gas regulation targets as described in EU regulation 517/2014. Hisense HVAC introduces the Lower GWP refrigerant R32 on its VRF products, which is a perfect solution for attaining the CO₂ emission targets.


Features

- Zero Ozone Depletion Potential (ODP)
- Lower Global Warming Potential (GWP)
- Less charge amount under the same capacity
- Single component refrigerant, easy to handle and recycle



Less refrigerant, less CO₂-EQ emissions

By using the R32 refrigerant with a low Global Warming Potential (GWP) and the Hi-Smart H5 system's reduced refrigerant charge, the overall CO₂ equivalent emissions can be lowered by 76% compared to the traditional R410A products.

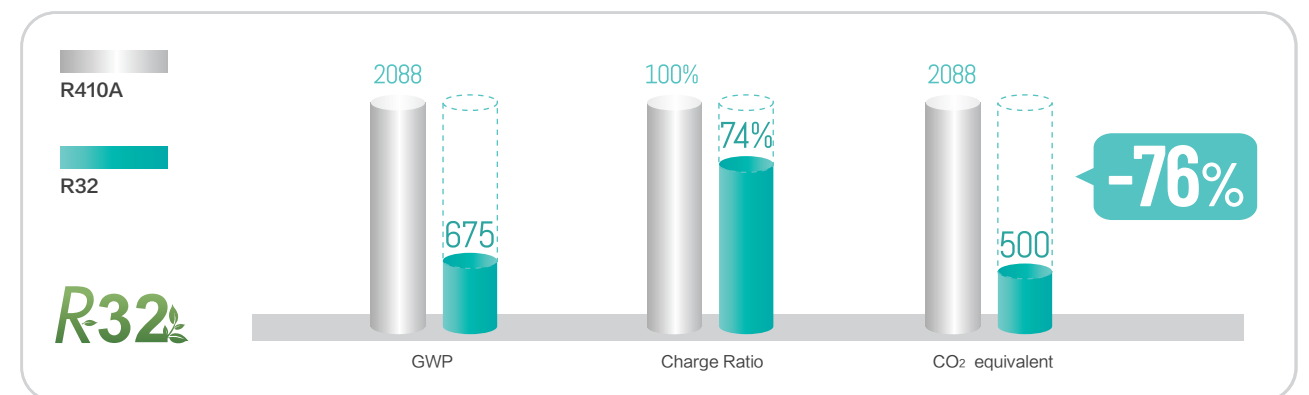

Multiple Measures Ensuring Room Safety


Refrigerant Leakage Detection

Real-time refrigerant leakage detection is essential for R32 refrigerant system. If the refrigerant concentration exceeds 5000ppm, the indoor unit will stop operation, and trigger the audible and visual alarm. It can also be linked to any third-party alarm system or ventilation system.

Refrigerant Recovery


In the event of a refrigerant leak, our system triggers alarms and shuts down. If the leak occurs in an indoor unit that exceeds the safe capacity, the system immediately activates refrigerant recovery. Furthermore, in the event of a sudden power outage, the shut-off box automatically closes the valves to prevent leaks.

The Progress of Refrigerant Recovery

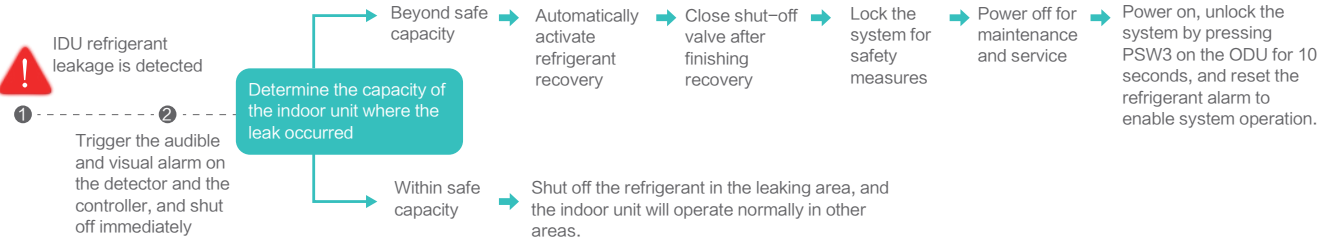

Slim and Compact Footprint

The H5 unit, with its smaller footprint and compact body compared to the last generation S Series top-flow unit for the same capacity, enables the utilization of the saved rooftop space for a green roof. This enhances the building's aesthetics.

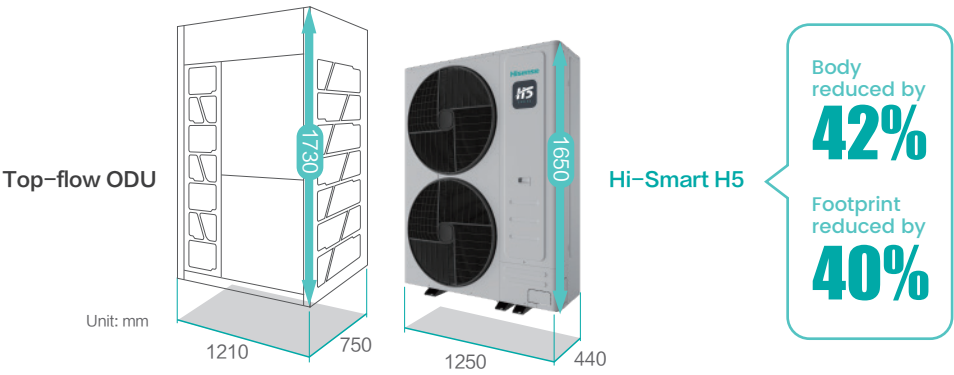

Anywhere & Everywhere

Thanks to its slim modular design, H5 offers unrivaled flexibility of installation location. Save your building's most valuable area, and place H5 in the small narrow spaces of your building. On the rooftop, balcony, or indoors; you choose!



Hi-Smart H5 Series



HP			4HP	5HP	6HP
Model	AC 1Φ, 220~240V/50/60Hz		AVW-41HJDH2H1	AVW-48HJDH2H1	AVW-54HJDH2H1
	AC 3Φ, 380~415V/50/60Hz		AVW-41HKDH2H1	AVW-48HKDH2H1	AVW-54HKDH2H1
Cooling	Capacity	kW	12.1	14.0	15.5
		kBtu/h	41.5	48.0	53.0
	Power Input	kW	3.30	4.24	4.70
	EER	kW/kW	3.67	3.30	3.30
	SEER	kW/kW	8.20	7.90	7.90
Heating	Capacity (Max./Nom.)	kW	14.2/12.1	16.0/14.0	18.0/15.5
		kBtu/h	48.0/41.5	54.5/48.0	61.5/53.0
	Power Input (Max./Nom.)	kW	3.60/2.63	4.10/3.18	4.80/3.52
	COP (Max./Nom.)	kW/kW	3.94/4.60	3.90/4.40	3.75/4.40
	SCOP	kW/kW	5.00	4.65	4.60
Air Flow Rate		m³/min	80	80	80
Sound Pressure Level(Cooling/Heating)		dB(A)	52/52	53/53	54/54
Refrigerant	Type	–	R32		
	Pre-charged Quantity	kg	2	2	2
Weight	Net Weight(Single-phase/Three-phase)	kg	94/95	94/95	94/95
	Gross Weight(Single-phase/Three-phase)	kg	109/110	109/110	109/110
Dimensions	Net (H×W×D)	mm	840×1100×390	840×1100×390	840×1100×390
	Packing(H×W×D)	mm	1000×1185×530	1000×1185×530	1000×1185×530
Cabinet Color		–	Grayish White	Grayish White	Grayish White
Ref. Piping	Gas	mm	15.88	15.88	15.88
		inch	5/8	5/8	5/8
	Liquid	mm	9.53	9.53	9.53
		inch	3/8	3/8	3/8
Connectable Indoor Units	Quantity	pcs	10	12	13
	Connection Ratio	–	30%~200%	30%~200%	30%~200%
Piping Design	Max. Piping Length	m	80	80	80
	Height Difference Between ODU and IDU	m (OD higher)	50	50	50
		m (OD lower)	40	40	40
	Height Difference Between IDUs	m	15	15	15
Operation Range	Cooling	DB °C	-10~52		
	Heating	WB/DB °C	-25.5~15.5/-25~26		

- Note:
- Rated cooling capacity and rated heating capacity are tested in the following conditions:
Cooling conditions: indoor air inlet temperature: 27℃ DB 19℃ WB, outdoor air inlet temperature: 35℃ DB, pipe length: 7.5m, pipe height difference: 0m.
Heating conditions: indoor air inlet temperature: 20℃ DB, outdoor air inlet temperature: 7℃ DB 6℃ WB, pipe length: 7.5m, pipe height difference: 0m.
 - During cooling (48~52℃) or heating (23~26℃) operations, the unit may operate intermittently.
 - The above performance data is obtained on the basis of the performance of this outdoor unit, with a 100%~combination of 4~way cassette indoor units.
 - A match ratio from 150% to 200% is allowed for cooling only.


Hi-Smart H5 Series



HP			8HP	10HP	12HP	14HP	16HP	
Model			AVW-76HKDHE2	AVW-96HKDHE2	AVW-114HKDHE2	AVW-136HKDHE2	AVW-154HKDHE2	
Combination			AVW-76HKDHE2	AVW-96HKDHE2	AVW-114HKDHE2	AVW-136HKDHE2	AVW-154HKDHE2	
Power Supply			/	/	/	/	/	
Cooling	Capacity	kW	22.4	28.0	33.5	40.0	45.0	
		kBtu/h	76.4	95.5	114.3	136.5	153.5	
		Power Input	kW	5.89	7.57	9.31	11.43	13.24
		EER	kW/kW	3.80	3.70	3.60	3.50	3.40
		SEER	—	7.70	8.40	8.35	7.00	7.00
Heating	Capacity (Max./Nom.)	kW	25/22.4	32/28	38/33.5	45/40	50/45	
		kBtu/h	85.3/76.4	107.5/95.5	127.9/114.3	153.5/136.5	170.6/153.5	
	Power Input (Max./Nom.)	kW	5.32/4.57	7.00/5.96	9.15/7.70	10.98/9.30	12.20/10.71	
	COP (Max./Nom.)	kW/kW	4.70/4.90	4.50/4.70	4.10/4.35	4.10/4.30	4.10/4.20	
	SCOP	—	5.50	4.80	4.86	4.75	4.85	
Air Flow Rate		m³/min	212	212	212	287	287	
Sound Pressure Level (Cooling/Heating)		dB(A)	54/57	55/58	55/58	61/62	62/65	
Refrigerant	Type	—	R32					
	Pre-charged Quantity	kg	4.0	4.5	5.7	6.0	6.0	
Weight	Net Weight	kg	191	192	193	215	216	
	Gross Weight	kg	209	210	211	233	234	
Dimensions	Net (H × W × D)	mm	1650 × 1250 × 440					
	Packing (H × W × D)	mm	1810 × 1350 × 580					
Cabinet Color		—	Grayish White					
Ref. Piping	Gas	mm	22.2	22.2	25.4	25.4	28.6	
		inch	7/8	7/8	8/8	8/8	9/8	
	Liquid	mm	9.53	9.53	12.7	12.7	12.7	
		inch	3/8	3/8	4/8	4/8	4/8	
Connectable Indoor Units	Quantity	pcs	17	21	26	31	34	
	Connection Ratio	—	30%~200%					
Piping Design	Total Piping Length	m	500	500	500	500	500	
	Max. piping Length	m (Actual)	150	150	150	150	150	
		m (Equivalent)	165	165	165	165	165	
	Height difference between ODU and IDU	m (ODU Up)	50	50	50	50	50	
		m (ODU Down)	40	40	40	40	40	
Operation Range	Cooling	DB	-10~55℃					
	Heating	WB/DB	-25~16.5℃/-24~23℃					

- Notes:
- Rated cooling capacity and rated heating capacity are tested in the following conditions:
Cooling Conditions: indoor air inlet temperature: 27℃ DB 19℃ WB, outdoor air inlet temperature: 35℃ DB, pipe length: 7.5m, pipe height difference: 0m.
Heating Conditions: indoor air inlet temperature: 20℃ DB, outdoor air nlet temperature: 7℃ DB 6℃ WB, pipe Length: 7.5m, pipe height difference: 0m.
 - The above performance data is obtained on the the basis of the performance of this outdoor unit, with a 100%~combination of 4~Way Cassette indoor units.
 - The above noise values are measured in the anechoic chamber without reflected echo, therefore the impact of the reflected echo must be included at the scene.
Measurement point: 1m from the service cover surface and 0.92m from the floor level.
 - The final appearance of outdoor units is subject to the actual products.
 - The dip switch DSW1-4 of outdoor PCB must set ON.This value is measured from the air outlet grille of the outdoor unit.
 - Under cooling operation, where the temperature is higher than 52℃, the system may work under intermittent operation.
 - A match ratio from 150% to 200% is allowed for cooling only.
- *1 If you have any questions, please contact with the technical engineer.


Hi-Smart H5 Series

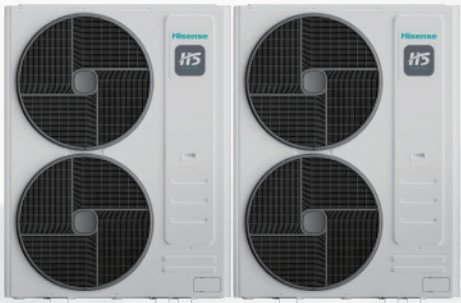

HP		18HP	20HP	22HP	24HP
Model		AVW-170HKDHE2	AVW-190HKDHE2	AVW-212HKDHE2	AVW-232HKDHE2
Combination		AVW-76HKDHE2	AVW-96HKDHE2	AVW-96HKDHE2	AVW-114HKDHE2
		AVW-96HKDHE2	AVW-96HKDHE2	AVW-114HKDHE2	AVW-114HKDHE2
Power Supply		3Φ,380 ~ 415V 50/60Hz			
Cooling	Capacity	kW	50.4	56.0	61.5
		kBtu/h	171.9	191.0	209.8
	Power Input	kW	13.5	15.1	16.9
	EER	kW/kW	3.74	3.70	3.64
	SEER	kW/kW	8.29	8.57	8.55
Heating	Capacity (Max./Nom.)	kW	56.5/50.4	63.0/56.0	69.0/61.5
		kBtu/h	192.8/171.9	215.0/191.0	235.4/209.8
	Power Input (Max./Nom.)	kW	12.3/10.5	14.0/11.9	16.1/13.7
	COP (Max./Nom.)	kW/kW	4.59/4.79	4.50/4.70	4.27/4.50
	SCOP	kW/kW	5.09	4.80	4.85
Air Flow Rate		m³/min	424	424	424
Sound Pressure Level (Cooling/Heating)		dB(A)	55/58	55/58	55/58
Refrigerant	Type	-	R32		
	Pre-charged Quantity	kg	9	9	10
Weight	Net Weight	kg	383	384	385
	Gross Weight	kg	419	420	421
Dimensions	Net (H×W×D)	mm	1650×(1250+1250)×440		
	Packing (H×W×D)	mm	1810×(1350+1350)×580		
Cabinet Color		-	Grayish White		
Ref. Piping	Gas	mm	28.6	28.6	28.6
		inch	9/8	9/8	9/8
	Liquid	mm	15.88	15.88	15.88
		inch	5/8	5/8	5/8
Connectable Indoor Units	Quantity	pcs	36	40	44
	Connection Ratio	-	30%~200%		
Piping Design	Total Piping Length	m	500	500	500
	Max. piping Length	m (Actual)	150	150	150
		m (Equivalent)	165	165	165
	Height difference between ODU and IDU	m (ODU Up)	50	50	50
		m (ODU Down)	40	40	40
Operation Range	Height Difference Between IDUs	m	40	40	40
	Cooling	DB	-10~55℃		
	Heating	WB/DB	-25~16.5℃/-24~23℃		

- Notes:
- Rated cooling capacity and rated heating capacity are tested in the following conditions:
Cooling Conditions: indoor air inlet temperature: 27℃ DB 19℃ WB, outdoor air inlet temperature: 35℃ DB, pipe length: 7.5m, pipe height difference: 0m.
Heating Conditions: indoor air inlet temperature: 20℃ DB, outdoor air nlet temperature: 7℃ DB 6℃ WB, pipe Length: 7.5m, pipe height difference: 0m.
 - The above performance data is obtained on the the basis of the performance of this outdoor unit, with a 100%-combination of 4-Way Cassette indoor units.
 - The above noise values are measured in the anechoic chamber without reflected echo, therefore the impact of the reflected echo must be included at the scene.
Measurement point: 1m from the service cover surface and 0.92m from the floor level.
 - The final appearance of outdoor units is subject to the actual products.
 - The dip switch DSW1-4 of outdoor PCB must set ON.This value is measured from the air outlet grille of the outdoor unit.
 - Under cooling operation, where the temperature is higher than 52℃, the system may work under intermittent operation.
 - A match ratio from 150% to 200% is allowed for cooling only.
- *1 If you have any questions, please contact with the technical engineer.

Hi-Smart H5 Series

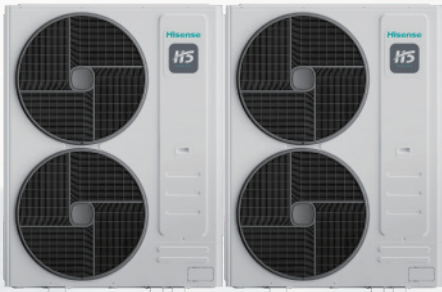


HP		26HP	28HP	30HP	32HP
Model		AVW-250HKDHE2	AVW-272HKDHE2	AVW-290HKDHE2	AVW-308HKDHE2
Combination		AVW-114HKDHE2	AVW-136HKDHE2	AVW-136HKDHE2	AVW-154HKDHE2
		AVW-136HKDHE2	AVW-136HKDHE2	AVW-154HKDHE2	AVW-154HKDHE2
Power Supply		3Φ,380 ~ 415V 50/60Hz			
Cooling	Capacity	kW	73.5	80.0	85.0
		kBtu/h	250.8	273.0	290.0
	Power Input	kW	20.7	22.9	24.7
	EER	kW/kW	3.54	3.50	3.45
	SEER	kW/kW	7.98	7.57	7.50
Heating	Capacity (Max./Nom.)	kW	82.5/73.5	90.0/80.0	95.0/85.0
		kBtu/h	281.5/250.8	307.1/273.0	324.2/290.0
	Power Input (Max./Nom.)	kW	20.1/17.0	22.0/18.6	23.2/20.0
	COP (Max./Nom.)	kW/kW	4.10/4.32	4.10/4.30	4.10/4.25
	SCOP	kW/kW	4.81	4.75	4.80
Air Flow Rate		m³/min	499	574	574
Sound Pressure Level (Cooling/Heating)		dB(A)	59/60	61/62	62/64
Refrigerant	Type	-	R32		
	Pre-charged Quantity	kg	12	12	12
Weight	Net Weight	kg	408	430	431
	Gross Weight	kg	444	466	467
Dimensions	Net (H×W×D)	mm	1650×(1250+1250)×440		
	Packing (H×W×D)	mm	1810×(1350+1350)×580		
Cabinet Color		-	Grayish White		
Ref. Piping	Gas	mm	31.75	31.75	31.75
		inch	10/8	10/8	10/8
	Liquid	mm	19.05	19.05	19.05
		inch	6/8	6/8	6/8
Connectable Indoor Units	Quantity	pcs	52	56	60
	Connection Ratio	-	30%~200%		
Piping Design	Total Piping Length	m	500	500	500
	Max. piping Length	m (Actual)	150	150	150
		m (Equivalent)	165	165	165
	Height difference between ODU and IDU	m (ODU Up)	50	50	50
		m (ODU Down)	40	40	40
Operation Range	Height Difference Between IDUs	m	40	40	40
	Cooling	DB	-10~55℃		
	Heating	WB/DB	-25~16.5℃/-24~23℃		


- Notes:
- Rated cooling capacity and rated heating capacity are tested in the following conditions:
Cooling Conditions: indoor air inlet temperature: 27℃ DB 19℃ WB, outdoor air inlet temperature: 35℃ DB, pipe length: 7.5m, pipe height difference: 0m.
Heating Conditions: indoor air inlet temperature: 20℃ DB, outdoor air nlet temperature: 7℃ DB 6℃ WB, pipe Length: 7.5m, pipe height difference: 0m.
 - The above performance data is obtained on the the basis of the performance of this outdoor unit, with a 100%-combination of 4-Way Cassette indoor units.
 - The above noise values are measured in the anechoic chamber without reflected echo, therefore the impact of the reflected echo must be included at the scene.
Measurement point: 1m from the service cover surface and 0.92m from the floor level.
 - The final appearance of outdoor units is subject to the actual products.
 - The dip switch DSW1-4 of outdoor PCB must set ON.This value is measured from the air outlet grille of the outdoor unit.
 - Under cooling operation, where the temperature is higher than 52℃, the system may work under intermittent operation.
 - A match ratio from 150% to 200% is allowed for cooling only.
- *1 If you have any questions, please contact with the technical engineer.

Hi-Smart Series

Dust-cleaning Technology

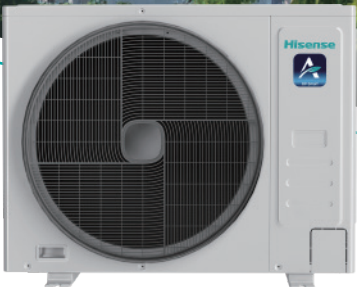

Keep your air conditioner performing at its best with Hi-Smart A's innovative dust-cleaning technology. Our outdoor fan reverses direction to efficiently remove accumulated dust, reducing air resistance and maintaining optimal heat exchange. Experience uninterrupted comfort for the long run with Hi-Smart A.

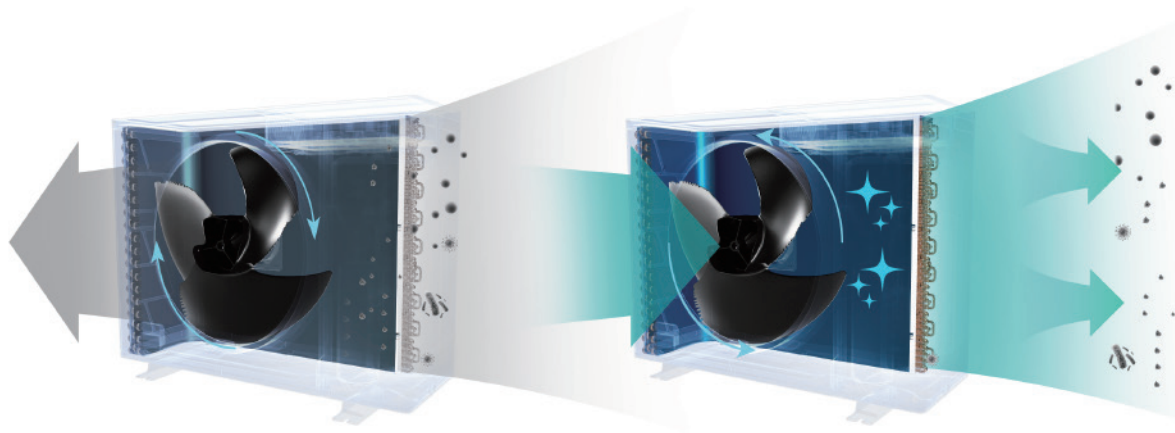

1W Standby Power Consumption

Hi-Smart A series uses optimized control scheme to further reduce standby power consumption to as low as 1W. The system intelligently enters 1W standby mode when the air conditioner is not in frequent use to avoid unnecessary waste.



Transition season




Leave home for a short time




Electromagnetic Heating Technology

Hisense's original internal electromagnetic heating technology is used without external heating tape. The lubricating oil is heated by the compressor's fixed rotor for higher heating efficiency, significantly reducing the low-temperature preheating time and power consumption.

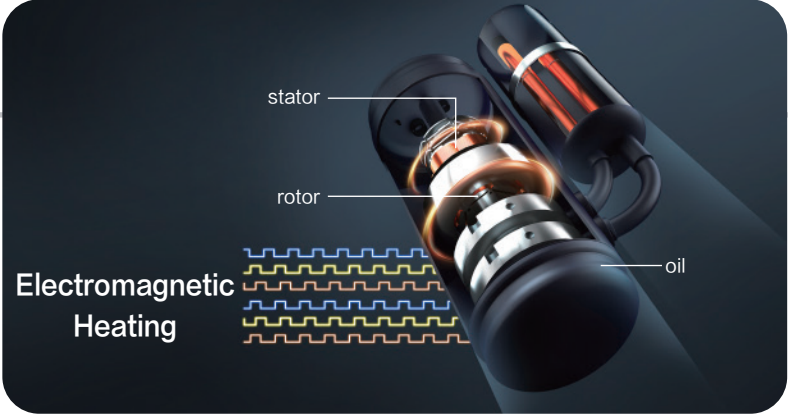


Compact Size for Space-saving

With its compact size, the Hi-Smart A system outdoor unit take up less space to make your balcony or backyard for other essentials. In addition, the mini VRF A-Series outdoor units require only a pair of pipes to connect to multiple indoor units , which reduces damage to walls and makes buildings more aesthetically pleasing.

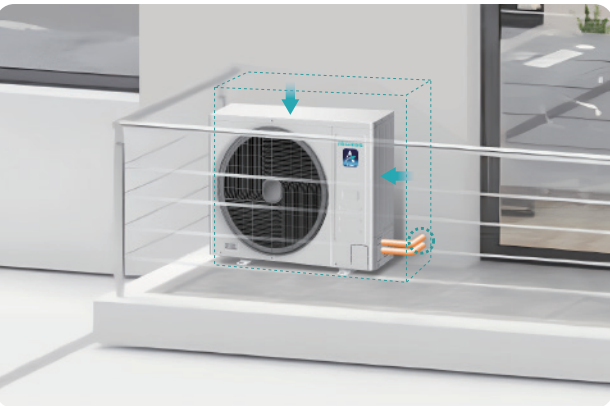

Mini VRF

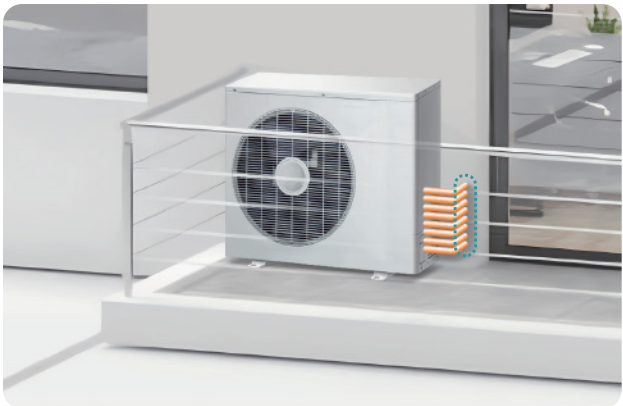

Multi split

Four-way Piping Connection


Installation restrictions on site do not stop Hi-Smart A mini VRF with flexible piping directions.including front, bottom, right, and rearconnections.



Flexible Air Discharge Directions

When the ODU is installed in narrow spaces where some obstacle blocks discharged air, the well-designed air outlet guide can divert the airflow to up, down, left, or right directions to enhance the heat dissipation efficiency.


Note: Air outlet guide module SH-76CD/SH-34CD

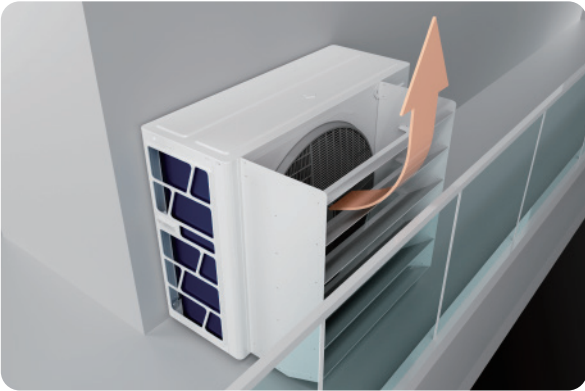

Long Piping for Design Flexibility


The Hi-Smart A provides long piping length possibility of 75m, with a total piping length of 120m. The height difference between IDU and ODU can be up to a maximum of 30m. These generous allowances facilitate system designs compared to the Multi-split system.

- ① Max.piping length: 75m
- ② Length between the first Branch Pipe and the farthest IDU: 30m
- ③ Length between IDU and the nearest branch pipe: 15m
- ④ Height difference between IDUs: 15m
- ⑤ Height difference between ODU and IDU: 30m

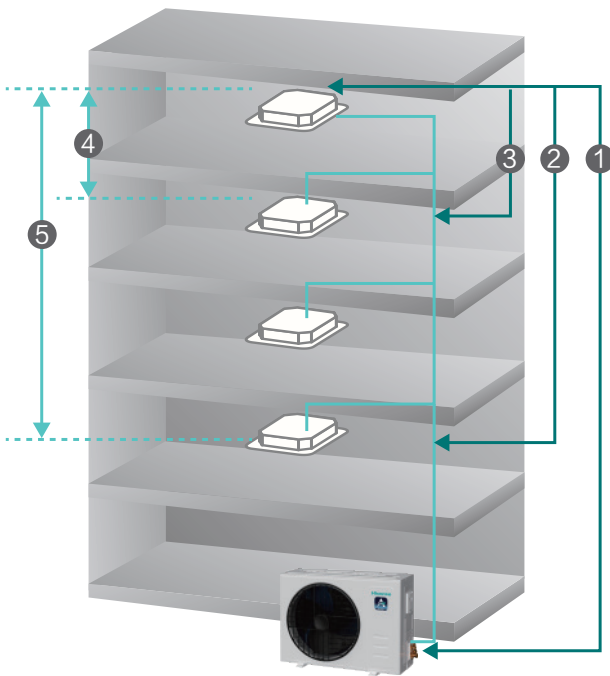


Multiple Piping Connection Types

Hi-Smart A series offers three piping connection options: flaring branch pipe, brazing branch pipe, and flaring branch headers, providing installers with multiple choices. The universal use of the head branches facilitates quick and convenient connection to pre-buried refrigerant pipelines, making it an excellent fit for real estate projects.

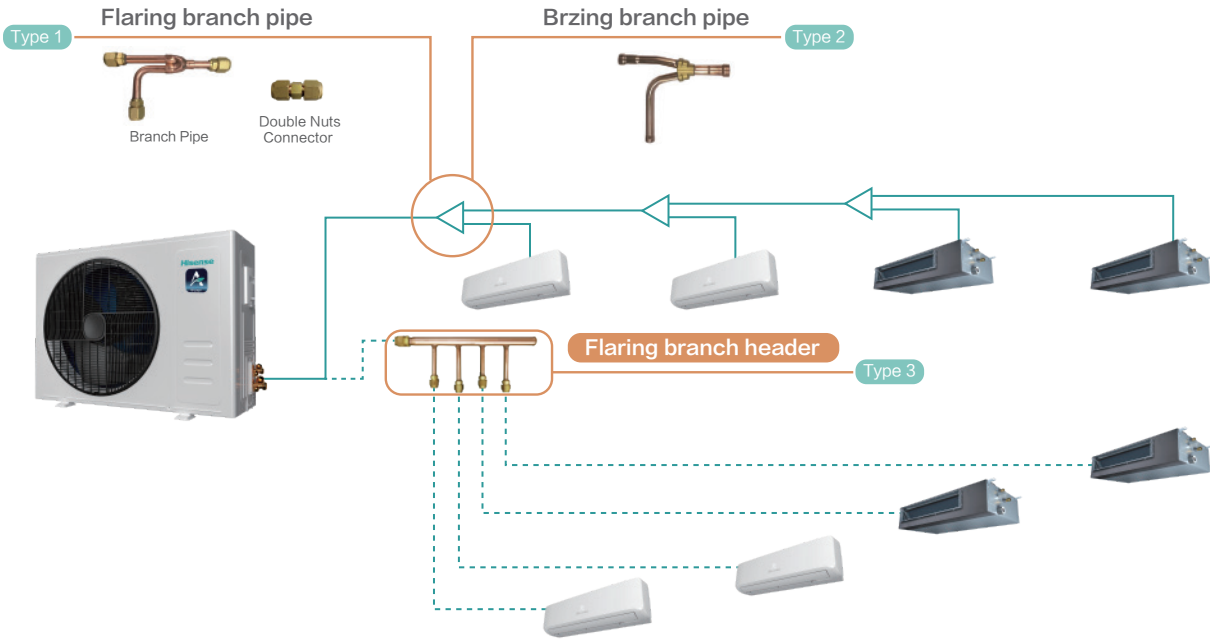

Brazing Free for Easier Installation

All flare connection based branch headers eliminate the need for on-site brazing, resulting in swift, safe, and quality installation.

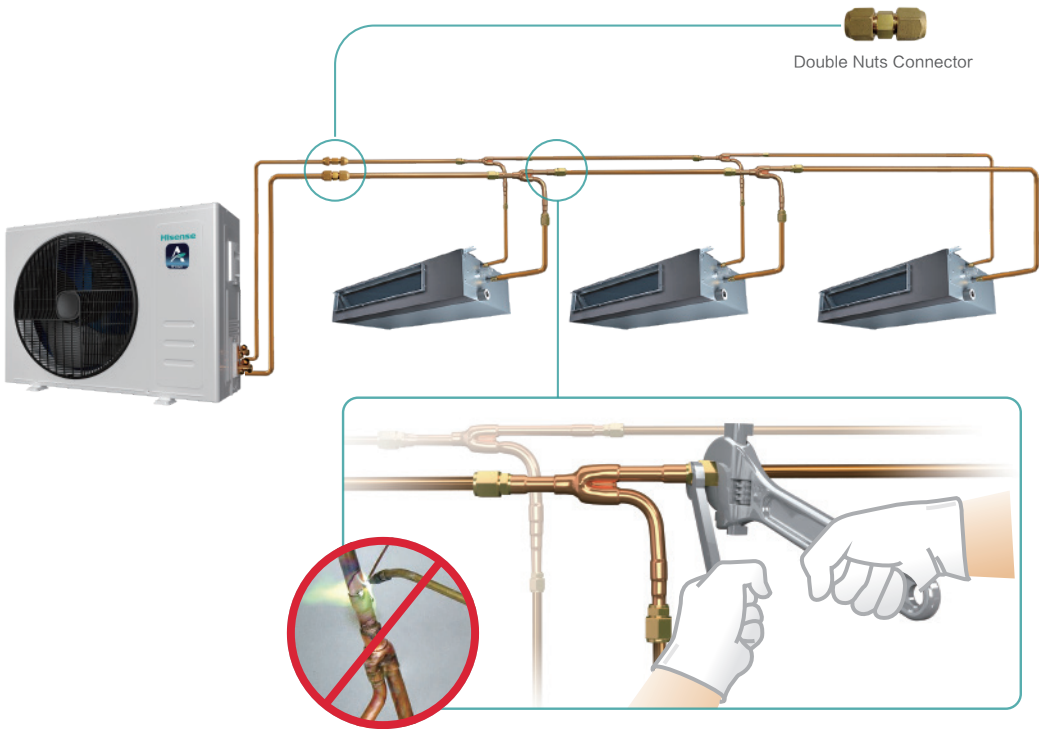

Hi-Smart A Series



HP			3	3.5	4	5	6
Model			AVW-27HJFAE1	AVW-34HJFAE1	AVW-42HJFAE1	AVW-48HJFAE1	AVW-54HJFAE1
Power Supply			AC 1 Φ, 220V~240V/50/60Hz				
Cooling	Capacity	kW	8.0	10.0	12.1	14.0	15.5
		kBtu/h	27.3	34.1	41.3	47.8	52.9
	Power Input	kW	2.02	2.67	3.32	3.89	4.38
	EER	kW/kW	3.96	3.74	3.65	3.60	3.54
Heating	Capacity	kW	9.5	11.2	14.0	16.0	17.0
		kBtu/h	32.4	38.2	47.8	54.6	58.0
	Power Input	kW	2.26	2.67	3.25	3.95	4.25
	COP	kW/kW	4.20	4.20	4.30	4.05	4.00
Air Flow Rate		m³/min	45	45	75	75	75
Sound Pressure Level (Cooling/Heating)		dB(A)	52/54	53/55	54/55	54/55	54/56
Refrigerant	Type	–	R410A				
	Pre-charged Quantity	kg	1.8	1.8	2.0	3.0	3.0
Weight	Net Weight	kg	50	52	64	71	71
	Gross Weight	kg	54	55	77	83	83
Dimensions	External (H×W×D)	mm	670×900×320			770×980×360	
	Packing (H×W×D)	mm	717×1056×427			920×1100×505	
Ref. Piping	Gas	mm	Φ15.88	Φ15.88	Φ15.88	Φ15.88	Φ15.88
		inch	5/8	5/8	5/8	5/8	5/8
	Liquid	mm	Φ9.53	Φ9.53	Φ9.53	Φ9.53	Φ9.53
		inch	3/8	3/8	3/8	3/8	3/8
Connectable Indoor Units	Quantity	pcs	1~5	1~6	1~7	1~9	1~10
	Connection Ratio	–	50%~150%				
Piping Design	Max. total piping Length	m	40	40	60	70	70
	Max. piping Length	m	25	25	50	60	60
	Height Difference Between ODU and IDU	m	20	20	30	30	30
	Height Difference Between IDUs	m	10	10	15	15	15
Operation Range	Cooling	DB	-5~59℃				
	Heating	WB/DB	-21~-20℃/-20~23℃				

Notes:
1. Rated cooling capacity and rated heating capacity are tested in the following conditions:
Cooling conditions: indoor air inlet temperature: 27℃ DB 19℃ WB, Outdoor air inlet temperature: 35℃ DB, pipe length: 7.5m, pipe height difference: 0m Heating conditions: indoor air inlet temperature: 20℃ DB, Outdoor air inlet temperature: 7℃ DB 6℃ WB, pipe length: 7.5m, pipe height difference : 0m
2. ※When outdoor ambient temperature is 55~59℃,Cooling operates intermittently.

Hi-Smart A Series



HP			6.5	7	8
Model			AVW-63HJFAE1	AVW-68HJFAE1	AVW-76HJFAE1
Power Supply			AC 1 Φ, 220V~240V/50/60Hz		
Cooling	Capacity	kW	18.1	20.0	22.4
		kBtu/h	61.8	68.2	76.4
	Power Input	kW	5.14	6.13	7.94
	EER	kW/kW	3.52	3.26	2.82
Heating	Capacity	kW	20.0	22.4	25.0
		kBtu/h	68.2	74.6	85.3
	Power Input	kW	5.05	5.85	6.65
	COP	kW/kW	3.95	3.80	3.75
Air Flow Rate		m³/min	93	93	93
Sound Pressure Level (Cooling/Heating)		dB(A)	56/58	57/60	57/60
Refrigerant	Type	–	R410A		
	Pre-charged Quantity	kg	3.8	3.8	3.8
Weight	Net Weight	kg	97	97	97
	Gross Weight	kg	110	110	110
Dimensions	External (H×W×D)	mm	1080×980×360		
	Packing (H×W×D)	mm	1230×1100×505		
Ref. Piping	Gas	mm	Φ19.05	Φ19.05	Φ19.05
		inch	3/4	3/4	3/4
	Liquid	mm	Φ9.53	Φ9.53	Φ9.53
		inch	3/8	3/8	3/8
Connectable Indoor Units	Quantity	pcs	2~11	2~12	2~13
	Connection Ratio	–	50%~150%		
Piping Design	Max. total piping Length	m	120	120	120
	Max. piping Length	m	75	75	75
	Height Difference Between ODU and IDU	m	30	30	30
	Height Difference Between IDUs	m	15	15	15
Operation Range	Cooling	DB	-5~59℃		
	Heating	WB/DB	-21~-20℃/-20~23℃		

Notes:
1. Rated cooling capacity and rated heating capacity are tested in the following conditions:
Cooling conditions: indoor air inlet temperature: 27℃ DB 19℃ WB, Outdoor air inlet temperature: 35℃ DB, pipe length: 7.5m, pipe height difference: 0m Heating conditions: indoor air inlet temperature: 20℃ DB, Outdoor air inlet temperature: 7℃ DB 6℃ WB, pipe length: 7.5m, pipe height difference : 0m
2. ※When outdoor ambient temperature is 55~59℃,Cooling operates intermittently.

Hi-Smart **L+** **C+** Series

High Performance Beyond Expectations



New air flow grille

Air supply distance is increased by 24% together with the 30Pa ESP.

High-efficiency oil separator

Improve the capacity and ensure stable operation.

Heat exchanger with anti-corrosion fin

High anti-corrosion capability.

High-efficiency twin rotary compressor


High efficiency, low noise and high reliability.

Take Hi-Smart L+ Series as an example.

High-efficiency DC Inverter Compressor

A high-efficiency DC inverter dual rotary compressor is adopted. It features unique dual-pressure chamber design and symmetrical location, which can effectively reduce the vibration and noise and improve the compressor performance, especially the performance under low-frequency operation.

Moreover, the dual rotary compressor has a small lubricating oil injection volume with stable oil return, and comes with a gas-liquid separator, which makes the system more reliable.

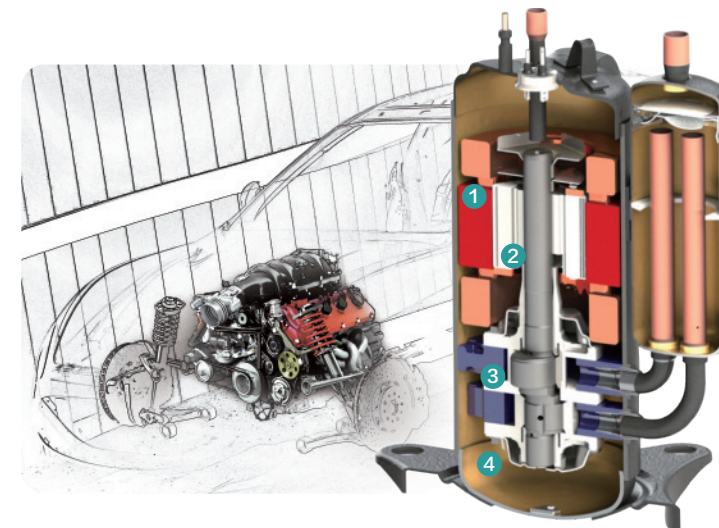

1 High-efficiency motor

Optimize the motor design to improve compressor performance.

2 Optimized rotor design

Lower the center of gravity of the compressor to reduce the noise and vibration.

3 Flat mechanism design


Improve the volumetric efficiency and the total performance.

4 Screw interactive fastening

Improve fastening effect and reduce deformation of the core.

Patented 360° Fitted Refrigerant Cooling Technology

To maintain the lifespan of the delicate electronic components, the unit uses patented 360° fitted refrigerant cooling technology to cool the whole electronic box effectively. It can overcome poor heat dissipation and solve high ambient temperature issues inside the electronic box, maintaining an efficient and reliable operation under harsh environment.

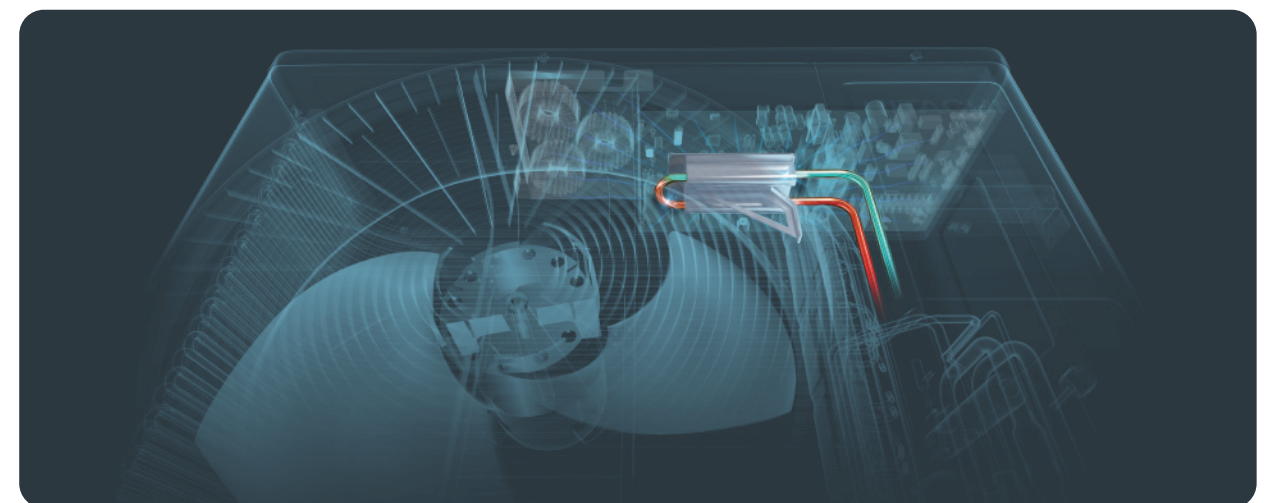


Note: 1.Compared with air-cooled technology, the temperature in electric box can be reduced about by 10%.

2.There is no refrigerant cooling kit inside the Hi-Smart L+ series(single phase unit).

Wide Operating Range


Extended operation range creates wider application potential, in cooling mode the operation range is from -10℃* to 48℃ and in heating mode the operation range is from -20℃ to 26℃, which adapts to many extreme conditions.

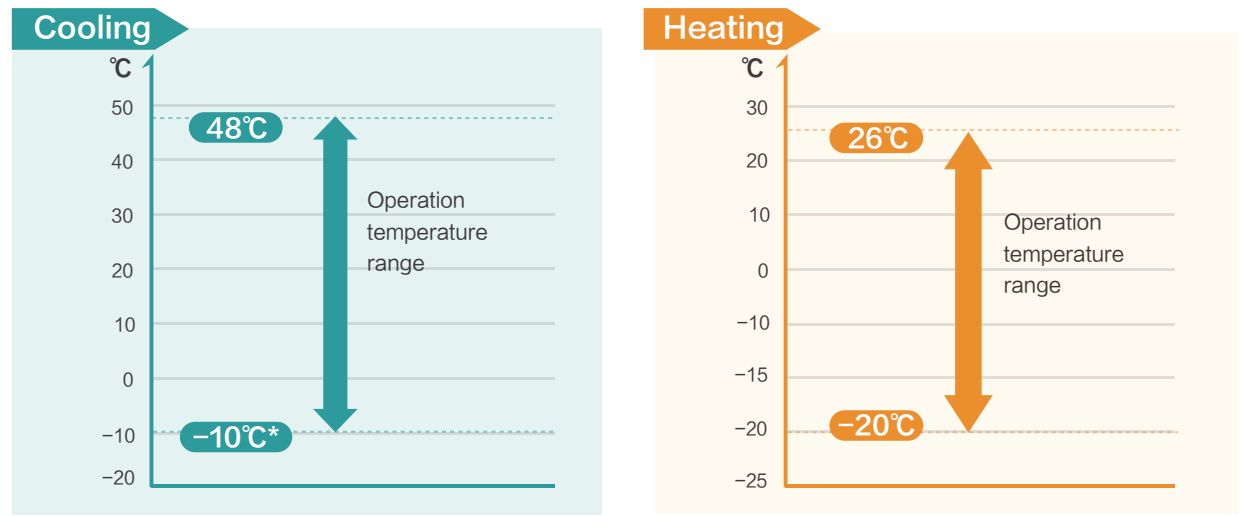

* In cooling mode, the operation is under interval operation when the temperature is below -5℃.

Dark Gray Fin (Standard)



All the heat exchangers adopt dark gray fin, which has excellent anti-corrosive performance. It is coated with epoxy resin using film-forming techniques while the traditional resins are acrylic resins. The epoxy resin is 1.5 times thicker than acrylic resin, and its acid-resistant, alkali-resistant and salt-fog resistant properties is 3 times better than acrylic resin.

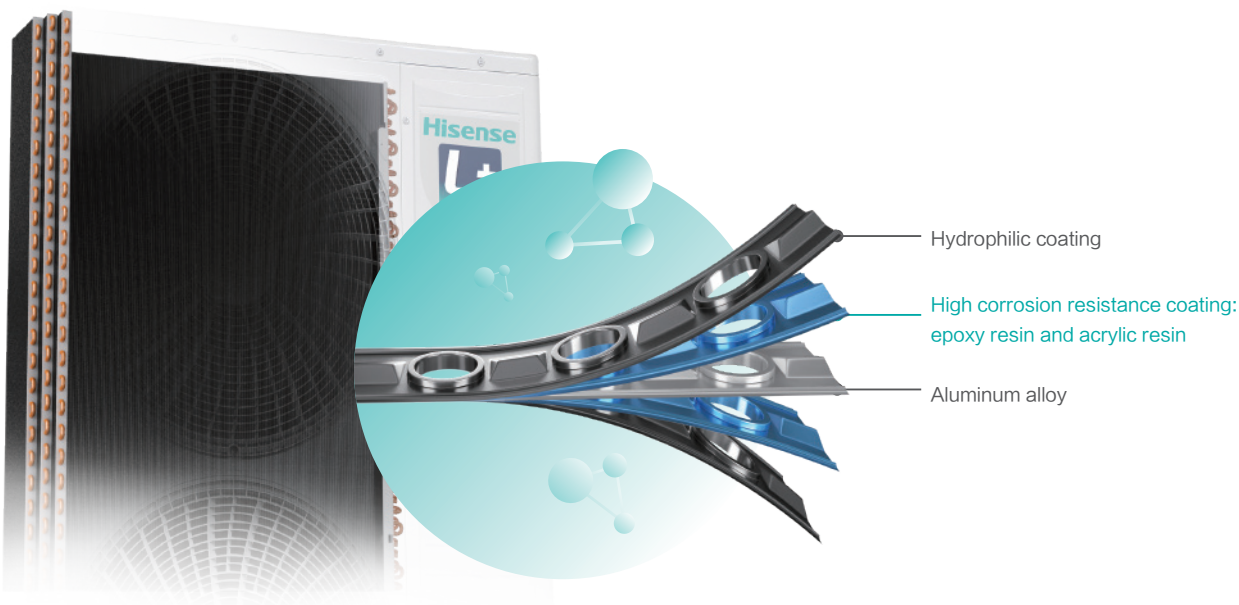

Note: For the anti-corrosive solution for the whole outdoor unit, please contact with our local engineers.

Bistable Four-way Valve


The bistable four-way valve is adopted in the outdoor unit, which only consumes power when reversing. During the normal operation (regardless of cooling or heating), it is no need to be energized. Compared with conventional four-way valve, it is more energy-saving. Moreover, the reliability of valve coil is greatly improved.

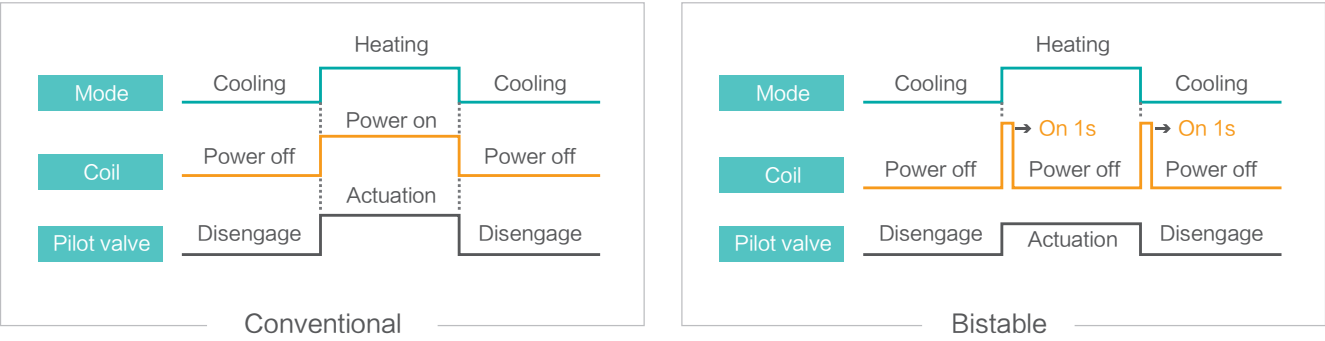

Further Air Discharge Distance

Optimized Air Duct System Design

An additional air duct like channel surrounding the fan is designed to further discharge the air and avoid discharge air from being absorbed again. Besides, together with the 30Pa external static pressure, air is tested to discharge up to 24% further compared with the conventional one.

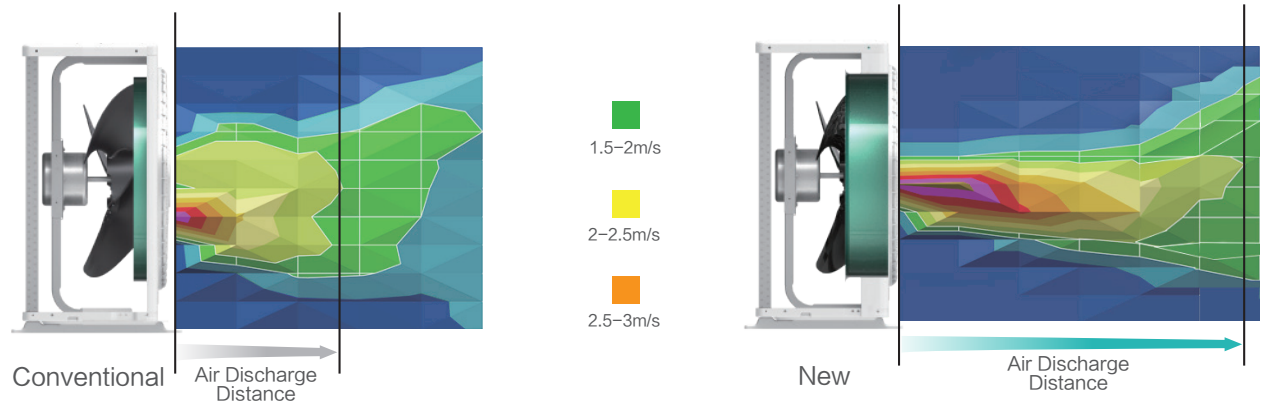

Hi-Smart L+ Series



Capacity (HP)			4.0	5.0	6.0	4.0	5.0	6.0
Model			AVW-41HJFHH2	AVW-48HJFHH2	AVW-54HJFHH2	AVW-41HKFHH2	AVW-48HKFHH2	AVW-54HKFHH2
Power Supply			AC 1 Φ, 220-240V/50/60Hz			AC 3 Φ, 380-415V/50/60Hz		
Cooling	Capacity	kW	12.1	14.0	15.5	12.1	14.0	15.5
		Btu/h	41500	48000	53000	41500	48000	53000
	Power Input	kW	2.79	3.43	4.18	2.79	3.43	4.18
		EER	W/W	4.33	4.08	3.71	4.33	4.08
	SEER	—	8.20	8.10	8.00	8.20	8.10	8.00
Heating	Capacity	kW	14.0	16.0	18.0	14.0	16.0	18.0
		Btu/h	48000	54500	61500	48000	54500	61500
	Power Input	kW	3.08	3.71	4.47	3.08	3.71	4.47
		COP	W/W	4.55	4.31	4.03	4.55	4.31
	SCOP	—	4.85	4.70	4.55	4.85	4.70	4.55
Ventilation	Air Flow Rate	m³/min	90	90	100	120	120	127
Sound Pressure Level	Cooling/Heating	dB(A)	52/55	52/55	53/56	52/55	52/55	53/56
Weight	Net	kg	106	107	108	112	113	114
	Gross	kg	118	119	120	123	124	125
Outer Dimensions	Height	mm	1380	1380	1380	1380	1380	1380
	Width	mm	950	950	950	950	950	950
	Depth	mm	370	370	370	370	370	370
Packing Dimensions	Height	mm	1531	1531	1531	1531	1531	1531
	Width	mm	1070	1070	1070	1070	1070	1070
	Depth	mm	515	515	515	515	515	515
Cabinet Color		—	Grayish White					
Ref. Piping	Gas	mm	Φ 15.88	Φ 15.88	Φ 15.88	Φ 15.88	Φ 15.88	Φ 15.88
		in.	5/8	5/8	5/8	5/8	5/8	5/8
	Liquid	mm	Φ 9.53	Φ 9.53	Φ 9.53	Φ 9.53	Φ 9.53	Φ 9.53
		in.	3/8	3/8	3/8	3/8	3/8	3/8
Refrigerant	Type	—	R410A					
	Before Shipment	kg	3.8	3.8	4.1	3.8	3.8	4.1
Connectable Indoor Units	Max. Qty.	pc	9	11	12	9	11	12
	Connection Ratio	%	50-150	50-150	50-150	50-150	50-150	50-150
Piping Design	Max. Piping Length	m	100	100	100	100	100	100
	Total Piping Length	m	150	150	150	150	150	150
	Height Difference Between ODU and IDU	m	50	50	50	50	50	50
		m	40	40	40	40	40	40
	Height Difference Between IDUs	m	15	15	15	15	15	15
Operation Range	Cooling	DB(°C)	(-10°) -5 ~ 48					
	Heating	DB/WB(°C)	-20/-20.5 ~ 26/15.5					

NOTES:

- The rated cooling and heating capacity are tested in the following conditions:
Cooling Operation Conditions: indoor air inlet temperature: 27°C DB 19°C WB, outdoor air inlet temperature: 35°C DB, pipe length : 7.5m, pipe lift: 0m
Heating Operation Conditions: indoor air inlet temperature: 20°C DB, outdoor air inlet temperature: 7°C DB 6°C WB, pipe length: 7.5m, pipe lift: 0m
- The above noise values are measured in the anechoic chamber without reflected echo, therefore the impact of the reflected echo must be taken into consideration at the scene.
Measurement point: 1m from the service cover surface and 1.5m from floor level.
- *1 When the temperature is between -10°C and -5°C, the cooling operation is under interval operation.
- The above performance data is obtained on the basis of the performance of this outdoor unit, with a 100%-combination of 4-way cassette indoor units.

Hi-Smart C+ Series



Capacity (HP)			8.0	10.0	12.0
Model			AVW-76HKFHH2	AVW-96HKFHH2	AVW-114HKFHH2
Power Supply			AC 3ϕ, 380-415V/50/60Hz		
Cooling	Capacity	kW	22.4	28.0	33.5
		Btu/h	76400	95500	114300
	Power Input	kW	6.22	8.12	13.40
	EER	W/W	3.60	3.45	2.50
	SEER	—	7.00	7.80	7.55
Heating	Capacity	kW	25.0	31.5	37.5
		Btu/h	85300	107500	128000
	Power Input	kW	5.81	7.59	10.08
	COP	W/W	4.30	4.15	3.72
	SCOP	—	4.50	4.50	4.30
Ventilation	Air Flow Rate	m³/min	150	163	163
Sound Pressure Level	Cooling/Heating	dB(A)	55/58	56/59	56/59
Weight	Net	kg	145	157	158
	Gross	kg	161	174	175
Outer Dimensions	Height	mm	1650	1650	1650
	Width	mm	1100	1100	1100
	Depth	mm	390	390	390
Packing Dimensions	Height	mm	1806	1806	1806
	Width	mm	1185	1185	1185
	Depth	mm	530	530	530
Cabinet Color		—	Grayish White		
Ref. Piping	Gas	mm	Φ22.2	Φ25.4	Φ25.4
		in.	7/8	1/1	1/1
	Liquid	mm	Φ12.7	Φ12.7	Φ12.7
		in.	1/2	1/2	1/2
Refrigerant	Type	—	R410A		
	Before Shipment	kg	5.5	6.5	6.5
Connectable Indoor Units	Max. Qty.	pc	15	18	19
	Connection Ratio	%	50-150	50-150	50-150
Piping Design	Max. Piping Length	m	150	150	150
	Total Piping Length	m	300	300	300
	Height Difference Between ODU and IDU	m	50	50	50
		m	40	40	40
	Height Difference Between IDUs	m	15	15	15
Operation Range	Cooling	DB(°C)	(-10°) -5 ~ 48		
	Heating	DB/WB(°C)	-20/-20.5 ~ 26/15.5		

NOTES:


- The rated cooling and heating capacity are tested in the following conditions:
Cooling Operation Conditions: indoor air inlet temperature: 27°C DB 19°C WB, outdoor air inlet temperature: 35°C DB, pipe length : 7.5m, pipe lift: 0m
Heating Operation Conditions: indoor air inlet temperature: 20°C DB, outdoor air inlet temperature: 7°C DB 6°C WB, pipe length: 7.5m, pipe lift: 0m
- The above noise values are measured in the anechoic chamber without reflected echo, therefore the impact of the reflected echo must be taken into consideration at the scene.
Measurement point: 1m from the service cover surface and 1.5m from floor level.
- *1 When the temperature is between -10°C and -5°C, the cooling operation is under interval operation.
- The above performance data is obtained on the basis of the performance of this outdoor unit, with a 100%-combination of 4-way cassette indoor units.

Hi-Smart Series

New Designed Air Channel

An additional air duct like channel surrounding the fan is designed to further discharge the air and avoid discharge air from being absorbed again. Air is tested to discharge up to 24% further compared with the conventional one. Besides, 30Pa external static pressure is available for units capacity ranged from 8HP to 12HP.


24%
Further Air Discharge

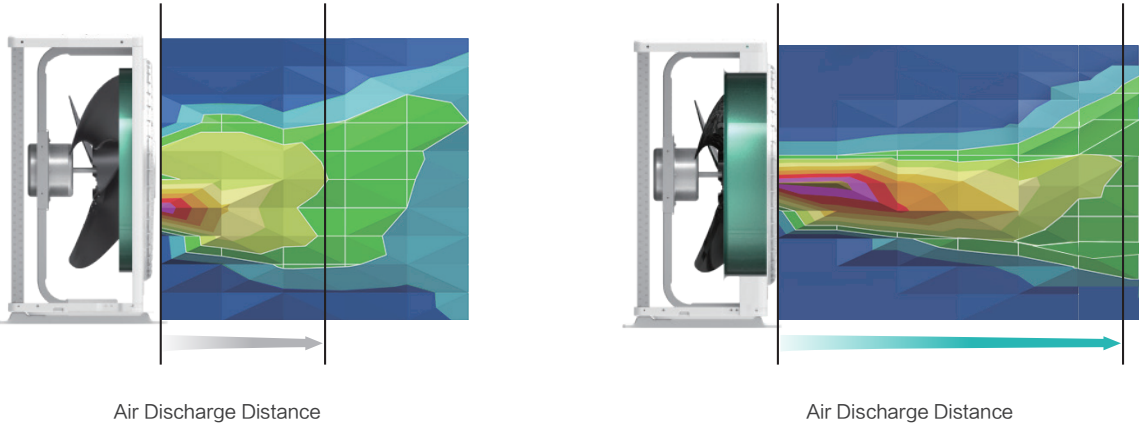

1.5~2m/s 2~2.5m/s 2.5~3m/s

Flexible Piping Connection



Installation restrictions on site does not stop Hisense mini VRF there with flexible piping directions which includes front, bottom, right, rear connections.

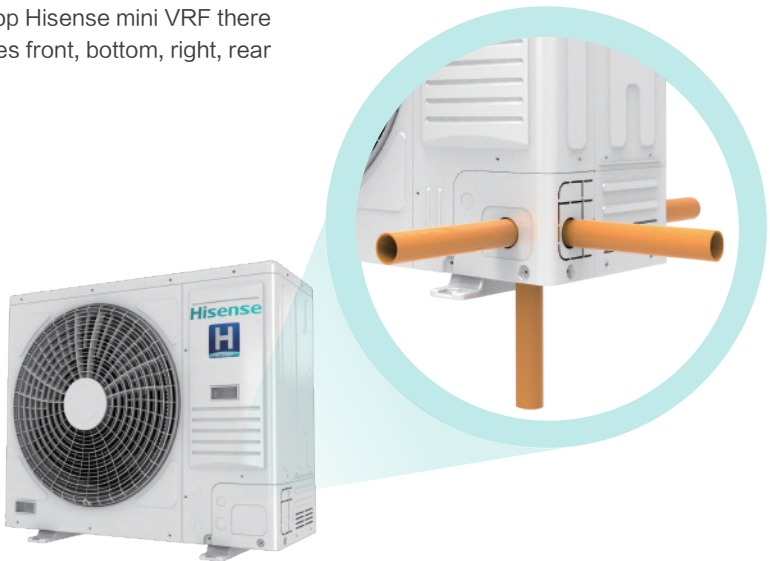

New Refrigerant Pipe Connection with Flare-nut Branch Pipe


Hisense VRF has newly developed the Flare-nut Branch Pipes, breaking through the common way of connecting refrigerant copper pipes by replacing welding processes with simple and safe flare nuts connections.

- Convenient and simple installation
- Saving installation time and cost
- Enhanced safety with no fire-involving process
- Preventing leakages due to poor welding
- No hot work permit application is required

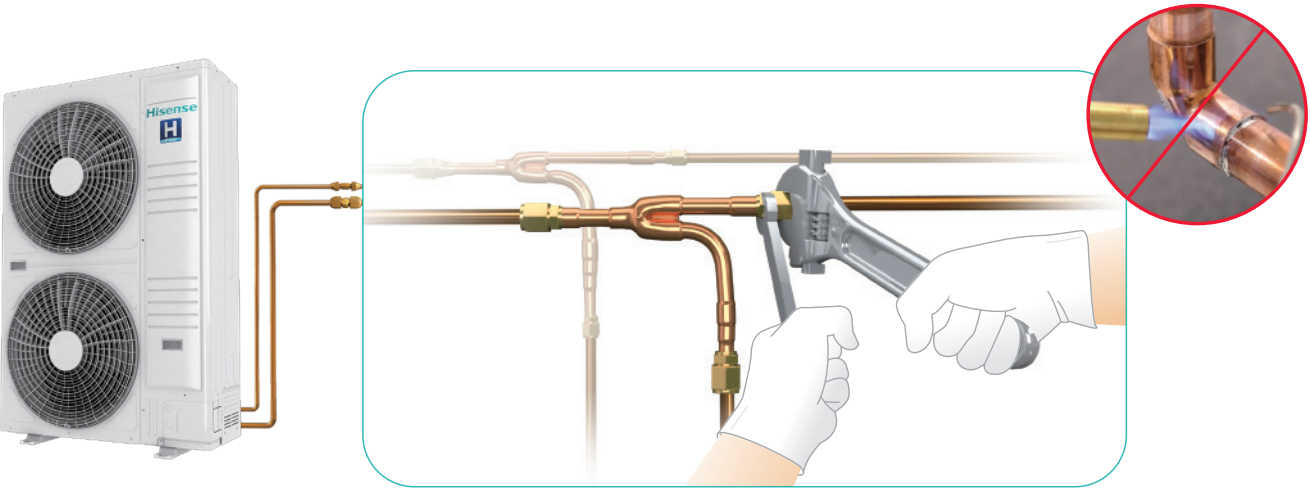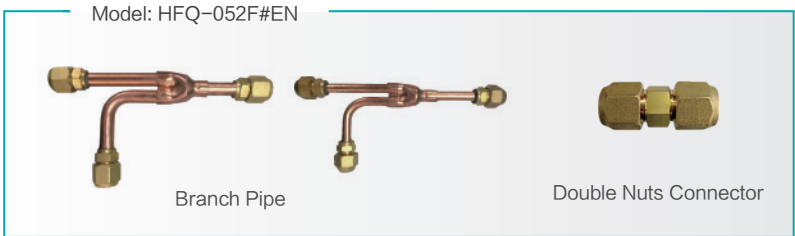

Excellent Piping Length

Increased piping length allows for flexible design and installation. Hisense inverter technology and two-level cooling technology allows longer piping length and outstanding height differences. The air-conditioning system can be implemented more flexibly.

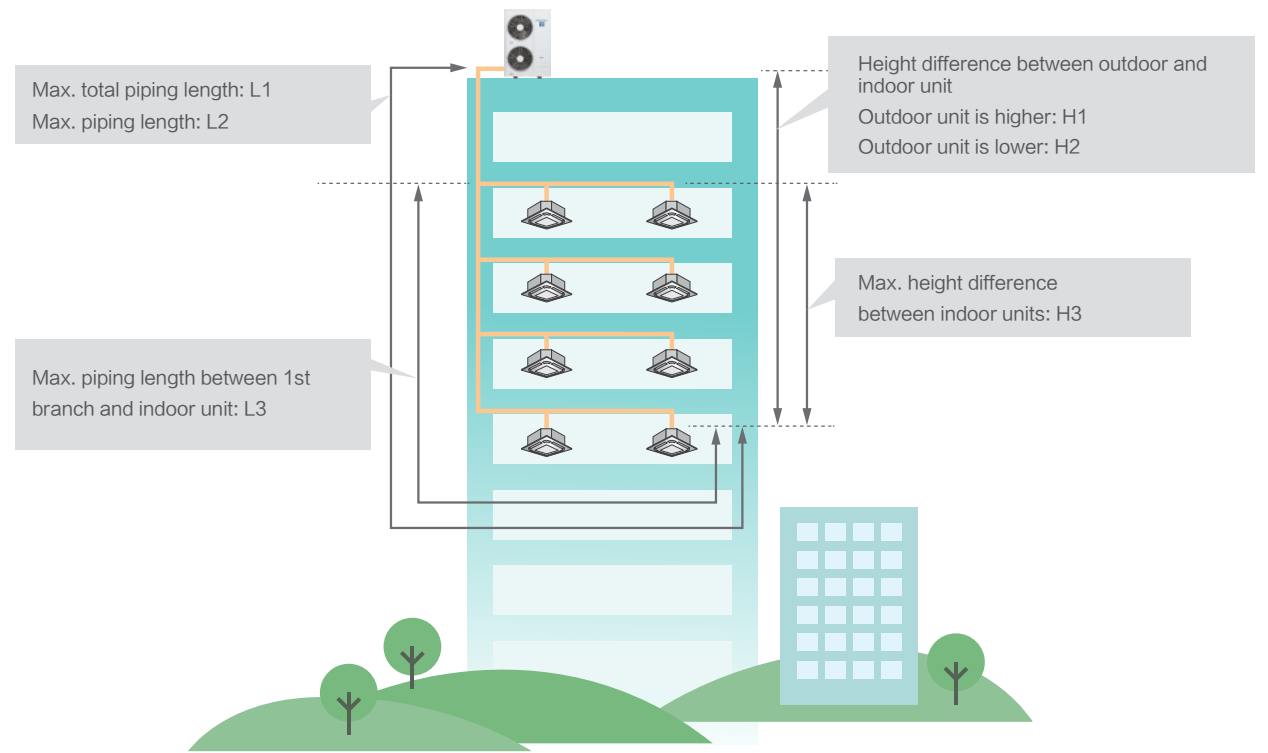

Power supply		AC 1Φ, 220~240V/ 50/60Hz			AC 1Φ, 220~240V/ 50/60Hz	AC 3Φ, 380~415V/ 50/60Hz	AC 3Φ, 380~415V/ 50/60Hz
HP		3HP	4HP	5HP	4/5/6HP	8HP	10/12HP
Picture							
Max. total piping length L1		30	40	60	120	150	250
Max. piping length L2		25	25	50	75	100	100
Max. length between the first branch pipe and the farthest indoor unit L3		10	15	20	30	30	40
Height difference between ODU and IDU	Outdoor unit is higher H1	20	20	20	30	50	50
	Outdoor unit is lower H2	20	20	20	30	40	40
Height difference between IDUs H3		3.5	3.5	3.5	10	15	15

Hi-Smart H Series



HP			3HP	4HP	5HP
Model			AVW-28HJFH	AVW-34HJFH	AVW-43HJFH
Power Supply			AC 1Φ, 220V~240V/50/60Hz		
Cooling	Capacity	kW	8.0	10.0	12.5
		kBtu/h	27.3	34.1	42.7
	Power Input	kW	1.93	2.43	2.98
	EER	kW/kW	4.15	4.27	4.19
Heating	Capacity	kW	9.5	11.2	14.0
		kBtu/h	32.4	38.2	47.8
	Power Input	kW	2.37	3.01	4.15
	COP	kW/kW	4.01	3.72	3.37
Ventilation	Air Flow Rate	m³/min	46.5	69.0	78.0
Sound	Sound Pressure Level (Cooling/Heating)	dB(A)	50/52	53/55	54/57
Compressor	Type	—	Twin Rotary		
Refrigerant	Type	—	R410A	R410A	R410A
	Pre-charged Quantity	kg	2.5	2.8	2.8
Weight	Net Weight	kg	65	73	78
	Gross Weight	kg	72	81	86
Dimensions	External(HxWxD)	mm	800x950x370	800x950x370	800x950x370
	Packing(HxWxD)	mm	951x1070x515	951x1070x515	951x1070x515
Cabinet Color			Ivory White	Ivory White	Ivory White
Ref. Piping	Gas	mm	φ15.88	φ15.88	φ15.88
		inch	5/8	5/8	5/8
	Liquid	mm	φ9.53	φ9.53	φ9.53
		inch	3/8	3/8	3/8
Connectable Indoor Units	Quantity	pcs	5	6	8
	Total Capacity	—	50%~125%	50%~125%	50%~125%
Piping Design	Height Difference Between ODU and IDU	m	20	20	20
		m	20	20	20
	Height Difference Between IDUs	m	3.5	3.5	3.5
	Max. Piping Length	m	25	25	50
Operation Range	Cooling	DB	-5℃~46℃	-5℃~46℃	-5℃~46℃
	Heating	WB	-15℃~15.5℃	-15℃~15.5℃	-15℃~15.5℃

Notes:
1. Rated cooling capacity and rated heating capacity are tested in the following conditions:
Cooling conditions: indoor air inlet temperature: 27℃ DB 19℃ WB, outdoor air inlet temperature: 35℃ DB, pipe length: 7.5m, pipe height difference: 0m.
Heating conditions: indoor air inlet temperature: 20℃ DB, outdoor air inlet temperature: 7℃ DB 6℃ WB, pipe length: 7.5m, pipe height difference: 0m.
2. The sound pressure level is based on following conditions:
1.5m beneath the unit.
The above data was measured in an anechoic chamber so that reflected sound should be taken into consideration in the field.

Hi-Smart H Series



HP			4HP	5HP	6HP
Model			AVW-38HJFH	AVW-48HJFH	AVW-54HJFH
Power Supply			AC 1Φ, 220V~240V/50/60Hz		
Cooling	Capacity	kW	11.2	14.0	15.5
		kBtu/h	38.2	47.8	52.9
		Power Input	2.60	3.46	4.21
		EER	4.31	4.05	3.68
Heating	Capacity	kW	12.5	16.0	18.0
		kBtu/h	42.7	54.6	61.4
		Power Input	2.78	3.71	4.47
		COP	4.50	4.31	4.03
Ventilation	Air Flow Rate	m³/min	90.0	90.0	100.0
Sound	Sound Pressure Level (Cooling/Heating)	dB(A)	50/52	52/54	53/55
Compressor	Type	–	Twin Rotary		
Refrigerant	Type	–	R410A	R410A	R410A
	Pre-charged Quantity	kg	3.8	3.8	4.1
Weight	Net Weight	kg	93	95	97
	Gross Weight	kg	111	111	111
Dimensions	External(HxWxD)	mm	1380x950x370	1380x950x370	1380x950x370
	Packing(HxWxD)	mm	1531x1070x515	1531x1070x515	1531x1070x515
Cabinet Color			Ivory White	Ivory White	Ivory White
Ref. Piping	Gas	mm	Φ15.88	Φ15.88	Φ15.88
		inch	5/8	5/8	5/8
	Liquid	mm	Φ9.53	Φ9.53	Φ9.53
		inch	3/8	3/8	3/8
Connectable Indoor Units	Quantity	pcs	9	11	11
	Total Capacity	–	50%~150%	50%~150%	50%~150%
Piping Design	Height Difference Between ODU and IDU	m	30	30	30
		m	30	30	30
	Height Difference Between IDUs	m	10	10	10
	Max. Piping Length	m	75	75	75
Operation Range	Cooling	DB	–5℃~46℃	–5℃~46℃	–5℃~46℃
	Heating	WB	–20℃~15.5℃	–20℃~15.5℃	–20℃~15.5℃

Notes:

1. Rated cooling capacity and rated heating capacity are tested in the following conditions:
Cooling conditions: indoor air inlet temperature: 27℃ DB 19℃ WB, outdoor air inlet temperature: 35℃ DB, pipe length: 7.5m, pipe height difference: 0m.
Heating conditions: indoor air inlet temperature: 20℃ DB, outdoor air inlet temperature: 7℃ DB 6℃ WB, pipe length: 7.5m, pipe height difference: 0m.

2. The sound pressure level is based on following conditions:
1.5m beneath the unit.
The above data was measured in an anechoic chamber so that reflected sound should be taken into consideration in the field.

Hi-Smart H Series



HP			8HP	10HP	12HP
Model			AVW-76HKFH1	AVW-96HKFH1	AVW-114HKFH1
Power Supply			AC 3Φ, 380V~415V/50/60Hz		
Cooling	Capacity	kW	22.4	28.0	33.5
		kBtu/h	76.5	95.6	114.3
		Power Input	6.37	7.75	10.30
		SEER	6.62	6.85	6.29
		EER	3.52	3.61	3.25
Heating	Capacity	kW	25.0	31.5	37.5
		kBtu/h	85.3	107.5	128
		Power Input	5.84	7.00	10.00
		SCOP	4.10	4.21	3.98
		COP	4.28	4.50	3.75
Ventilation	Air Flow Rate	m³/min	127.0	150.0	163.0
Sound	Sound Pressure Level (Cooling/Heating)	dB(A)	57/58	58/59	59/60
Compressor	Type	–	Twin Rotary		
Refrigerant	Type	–	R410A	R410A	R410A
	Pre-charged Quantity	kg	5.63	5.50	6.50
Weight	Net Weight	kg	124	145	158
	Gross Weight	kg	139	161	175
Dimensions	External (HxWxD)	mm	1380x950x370	1650x1100x390	1650x1100x390
	Packing(HxWxD)	mm	1531x1070x515	1806x1185x530	1806x1185x530
Cabinet Color			Ivory White	Ivory White	Ivory White
Ref. Piping	Gas	mm	Φ19.05	Φ22.2	Φ25.4
		inch	3/4	7/8	1
	Liquid	mm	Φ9.53	Φ12.7	Φ12.7
		inch	3/8	1/2	1/2
Connectable Indoor Units	Quantity	pcs	15	17	19
	Total Capacity	–	50%~150%	50%~150%	50%~150%
Piping Design	Height Difference Between ODU and IDU	m	50	50	50
		m	40	40	40
	Height Difference Between IDUs	m	15	15	15
	Max. Piping Length	m	100	100	100
	Total Piping Length	m	150	250	250
Operation Range	Cooling	DB	–5℃~50℃	–5℃~50℃	–5℃~50℃
	Heating	WB	–20℃~15.5℃	–20℃~15.5℃	–20℃~15.5℃

Notes:

1. Rated cooling capacity and rated heating capacity are tested in the following conditions:
Cooling conditions: indoor air inlet temperature: 27℃ DB 19℃ WB, outdoor air inlet temperature: 35℃ DB, pipe length: 7.5m, pipe height difference: 0m.
Heating conditions: indoor air inlet temperature: 20℃ DB, outdoor air inlet temperature: 7℃ DB 6℃ WB, pipe length: 7.5m, pipe height difference: 0m.

2. The sound pressure level is based on following conditions:
1.5m beneath the unit.
The above data was measured in an anechoic chamber so that reflected sound should be taken into consideration in the field.

INDOOR
UNITS

4-Way Cassette / Mini 4-Way Cassette

1-Way Cassette

2-Way Cassette

Console

Ceiling Ducted (AC/DC Low-height)

Ceiling Ducted(High/Low Static Pressure)

Wall Mounted

Floor Standing

Ceiling & Floor

Floor Concealed

All Fresh Air Indoor Unit

Heat Recovery Ventilator

AHU Connection KIT

AIR
CONDITIONING
SOLUTION

Indoor Units Line-up

HP		0.6	0.8	1.0	1.3	1.5	1.6	1.8	1.9	2.0	2.3	2.5	3.0	3.3	4.0	4.5	5.0	6.0	8.0	10.0
kBtu/h		5	7	9	12	14	15	17	18	19	22	24	27	30	38	42	48	54	76	96
R32 R410A	4-Way Cassette*			•	•		•			•	•	•	•	•	•		•	•		
R32 R410A	Mini 4-Way Cassette*	•	•	•	•		•	•		•										
	1-Way Cassette		•	•	•	•			•			•								
	2-Way Cassette		•	•	•	•			•			•	•	•	•		•	•		
	Console	•	•	•	•		•	•												
	Ceiling Ducted (AC Low-height)	•	•	•	•		•	•		•	•	•								
R32 R410A	Ceiling Ducted* (DC Low-height)	•	•	•	•		•			•		•								
R32 R410A	Ceiling Ducted* (DC High Static Pressure)		•	•	•		•			•		•		•	•	•	•	•	•	•
	Ceiling Ducted (High Static Pressure)		•	•	•		•			•	•	•	•	•	•		•	•		
	Ceiling Ducted (Low Static Pressure)		•	•	•		•			•	•	•	•	•	•		•	•		
R32 R410A	Wall Mounted*	•	•	•	•		•			•		•	•							
	Floor Standing														•		•	•		•
	Ceiling & Floor							•		•	•	•	•	•	•		•			
	Floor Concealed			•		•			•			•								

Note: 1. For more details, check each unit's respective pages. 2. * Be compatible with both R32 and R410a.

Indoor Units Feature Overview

Unit	Accessories									
	Drain Pump (built-in)	Drain Pump (external)	3D Airflow Panel	Filter	Humidity Sensor	AirPure Kit	Motion Sensor	Hi-Motion	Outlet Air Temp Sensor	Float Switch
4-Way Cassette	●	○	×	●	○	○	○	○	●	●
Mini 4-Way Cassette	●	○	×	●	○	○	○	○	●	●
1-Way Cassette	●	○	×	●	×	×	×	○	●	●
2-Way Cassette	●	○	×	●	×	×	×	○	●	●
Console	×	○	×	●	○	×	×	○	×	×
Ceiling Ducted (AC Low-height)	●	○	○	●	○	○	×	○	×	●
Ceiling Ducted (DC Low-height)	●	○	○	●	○	○	×	○	●	●
Ceiling Ducted (DC High Static Pressure) AVD-07~AVD-54	○	○	×	●	○	○	×	○	●	●
Ceiling Ducted (DC High Static Pressure) AVD-76 & AVD-96	○	○	×	○	○	○	×	○	●	●
Ceiling Ducted (High Static Pressure)	○	○	×	●	○	○	×	○	×	●
Ceiling Ducted (Low Static Pressure)	○	○	×	●	○	○	×	○	×	●
Wall Mounted	×	×	×	●	○	●	×	○	●	×
Floor Standing	×	×	×	●	○	×	×	×	×	×
Ceiling & Floor	×	○	×	●	×	×	×	○	●	×
Floor Concealed	×	○	×	×	×	×	×	○	●	×

Remarks: Standard: ● Optional: ○ Incompatible: ✕


Unit	Features											
	Dry Contact Input	Windows Linkage	Dry Contact Output	Fresh Air Intake	Sleep	Quiet	ECO	Individual Louver Control	Breeze Mode	Self Cleaning	Auto Fan Speed	Dynamic ESP
4-Way Cassette	●	●	●	●	●	●	●	●	●	●	●	✕
Mini 4-Way Cassette	●	●	●	●	●	●	●	●	●	●	●	✕
1-Way Cassette	●	✕	●	●	●	●	●	✕	✕	●	●	✕
2-Way Cassette	●	✕	●	●	✕	✕	✕	●	✕	✕	●	✕
Console	●	✕	●	●	●	●	●	✕	✕	✕	✕	✕
Ceiling Ducted (AC Low-height)	●	●	●	●	●	●	●	✕	✕	✕	✕	✕
Ceiling Ducted (DC Low-height)	●	●	●	●	●	●	●	✕	✕	●	●	✕
Ceiling Ducted (DC High Static Pressure) AVD-07~AVD-54	●	●	●	●	●	●	●	✕	✕	●	●	●
Ceiling Ducted (DC High Static Pressure) AVD-76 & AVD-96	●	●	●	✕	●	●	●	✕	✕	●	●	●
Ceiling Ducted (High Static Pressure)	●	●	●	●	✕	✕	●	✕	✕	✕	✕	✕
Ceiling Ducted (Low Static Pressure)	●	●	●	●	✕	✕	●	✕	✕	✕	✕	✕
Wall Mounted	●	●	●	✕	●	●	●	✕	✕	●	●	✕
Floor Standing	●	●	●	✕	●	✕	●	✕	✕	●	●	✕
Ceiling & Floor	●	✕	●	✕	✕	✕	✕	✕	✕	✕	✕	✕
Floor Concealed	●	✕	●	✕	●	●	●	✕	✕	✕	●	✕

Remarks: Standard: ● Optional: ○ Incompatible: ✕


4-Way Cassette Mini 4-Way Cassette

Compact and Classy Design

The 4-way cassette is as slim as 238mm, and the mini 4-way cassette is only 215mm, making them suitable for narrow ceiling spaces. The newly designed panel seamlessly integrates with indoor aesthetics.

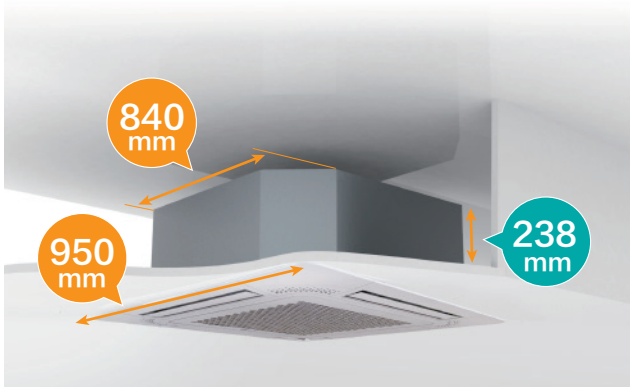


4-way Cassette

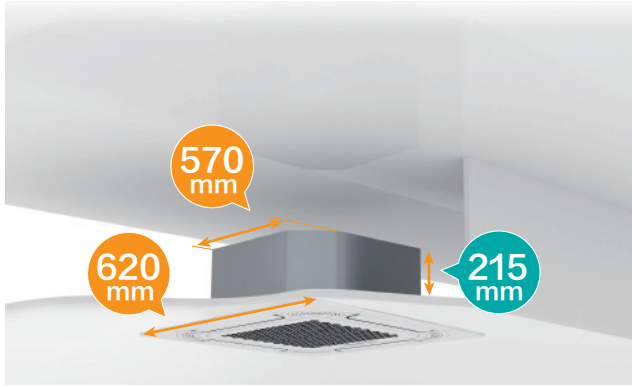

Mini 4-way Cassette


Higher Installation

The cassette unit is capable of blowing air from ceiling heights of up to 4.2m, ensuring effective air distribution even in rooms with high ceilings.

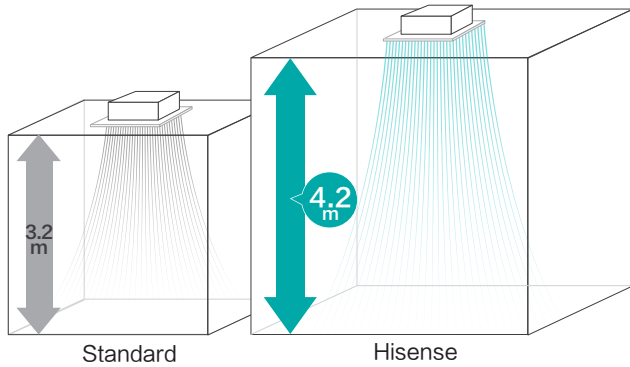


Breeze Mode

Under the new designed breeze mode, the cold air is blown out from the microholes in the panel, and the unit is working in a mute mode, which can avoid blowing air directly on people and achieve more even and comfortable airflow.

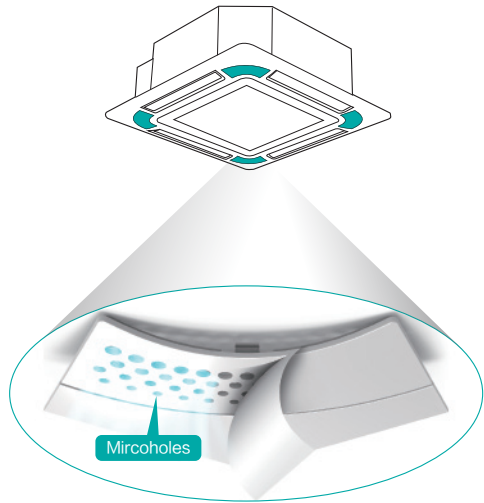

Individual Louvers Control

4-way cassette louvers are now capable of individual control to freely choose how you want your AC unit supplies air according to different needs, applications and installation layouts. Each louver has 7 adjustable angle settings with a maximum angle of up to 64°.

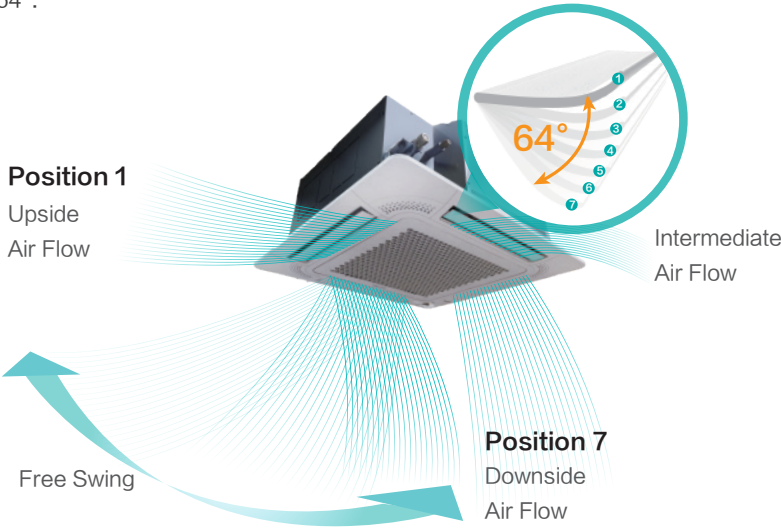


Self-cleaning Function

The cassette unit is featured with self-cleaning function. With just a press on the controller, the unit cleans itself automatically without manual intervention. It not only ensures clean and healthy air supply but also saves your valuable time and cost.



Motion Sensor

The sensor detects human presence to automatically switch the cassette unit on or off and adjust the airflow direction towards people or away from them. When the area becomes crowded, the system automatically lowers the set temperature to maintain comfort, and vise versa.

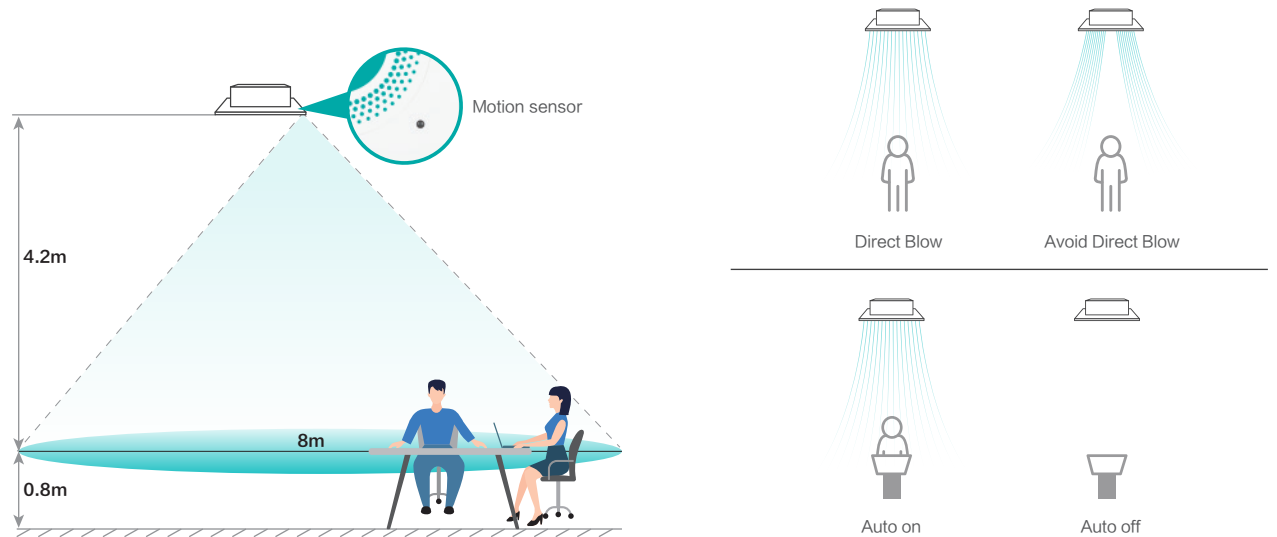

R32 | R410A

4-Way Cassette




Model			AVBC-09 HJDBA	AVBC-12 HJDBA	AVBC-15 HJDBA	AVBC-19 HJDBA	AVBC-22 HJDBA	AVBC-24 HJDBA	AVBC-27 HJDBA	AVBC-30 HJDBA	AVBC-38 HJDBA	AVBC-48 HJDBA	AVBC-54 HJDBA
Power supply			AC 1 Φ, 220V~240V/50Hz/60Hz										
Capacity	Cooling	kW	2.8	3.6	4.5	5.6	6.3	7.1	8.0	9.0	11.2	14.0	16.0
		Btu/h	9,600	12,300	15,300	19,100	21,500	24,200	27,300	30,700	38,200	47,800	54,600
	Heating	kW	3.2	4.0	5.0	6.3	7.1	8.0	9.0	10.0	12.5	16.0	18.0
		Btu/h	10,900	13,700	17,100	21,500	24,200	27,300	30,700	34,100	42,700	54,600	61,400
Power Input	Cooling	W	20	30	40	50	50	60	70	70	80	130	130
	Heating	W	20	30	40	50	50	60	70	70	80	130	130
Sound Pressure	dB(A)		30/28/28/ 27/26/26	32/29/29/ 28/27/26	33/31/29/ 29/27/26	34/31/30/ 28/28/26	36/33/32/ 31/29/28	36/33/32/ 31/29/28	37/36/35/ 33/31/30	37/36/35/ 33/31/30	42/40/38/ 36/34/33	46/44/40/ 38/36/34	46/44/41/ 40/38/36
Air Flow Rate	m³/min		15.0/12.8/ 12.0/10.8/	17.0/14.0/ 12.8/11.8/	19.0/15.0/ 13.9/12.6/	19.0/15.0/ 13.9/12.6/	26.0/20.0/ 18.3/17.0/	27.0/21.1/ 19.1/18.0/	25.0/21.1/ 19.6/17.9/	25.0/22.3/ 20.3/18.3/	31.0/29.5/ 28.7/26.0/	37.0/33.5/ 29.6/27.2/	37.0/34.0/ 30.7/28.9/
			10.0/8.8	10.8/9.1	11.4/10.5	11.8/10.5	15.1/13.0	15.8/14.7	16.1/14.7	16.9/15.3	23.5/20.5	24.2/22.4	25.6/23.8
Piping	Connection Type	—	Flare-nut Connection(with Flare Nuts)										
	Liquid	mm	Φ6.35	Φ6.35	Φ6.35	Φ6.35	Φ6.35	Φ9.53	Φ9.53	Φ9.53	Φ9.53	Φ9.53	Φ9.53
		inch	(1/4)	(1/4)	(1/4)	(1/4)	(1/4)	(3/8)	(3/8)	(3/8)	(3/8)	(3/8)	(3/8)
	Gas	mm	Φ12.7	Φ12.7	Φ12.7	Φ12.7	Φ12.7	Φ15.88	Φ15.88	Φ15.88	Φ15.88	Φ15.88	Φ15.88
		inch	(1/2)	(1/2)	(1/2)	(1/2)	(1/2)	(5/8)	(5/8)	(5/8)	(5/8)	(5/8)	(5/8)
	Condensate Drain	—	O.D. 32										
Weight	Net Weight	kg	20	20	20	20	21	21	23	23	26	26	26
	Gross Weight	kg	24	24	24	24	25	25	27	27	31	31	31
Dimensions	External	H mm	238	238	238	238	238	238	238	238	288	288	288
		W mm	840	840	840	840	840	840	840	840	840	840	840
		D mm	840	840	840	840	840	840	840	840	840	840	840
	Packaging	H mm	292	292	292	292	292	292	292	292	342	342	342
		W mm	945	945	945	945	945	945	945	945	945	945	945
		D mm	945	945	945	945	945	945	945	945	945	945	945
Decoration Panel	Model	—	HPE-GNK1										
	Color	—	Neutral White										
	Body Dimensions	H mm	47	47	47	47	47	47	47	47	47	47	47
		W mm	950	950	950	950	950	950	950	950	950	950	950
		D mm	950	950	950	950	950	950	950	950	950	950	950
	Packaging Dimensions	H mm	100	100	100	100	100	100	100	100	100	100	100
		W mm	1022	1022	1022	1022	1022	1022	1022	1022	1022	1022	1022
		D mm	1022	1022	1022	1022	1022	1022	1022	1022	1022	1022	1022
	Net Weight	kg	5.7	5.7	5.7	5.7	5.7	5.7	5.7	5.7	5.7	5.7	5.7
	Gross Weight	kg	8.0	8.0	8.0	8.0	8.0	8.0	8.0	8.0	8.0	8.0	8.0

- Notes:
1. The nominal cooling capacity and heating capacity are based on following conditions:
Cooling Operation Conditions
Indoor Air Inlet Temperature: 27°C DB (80°F DB), 19.0°C WB (66.2°F WB)
Outdoor Air Inlet Temperature: 35°C DB (95°F DB)
Piping Length: 7.5 Meters Piping Lift: 0 Meter
Heating Operation Conditions
Indoor Air Inlet Temperature: 20°C DB (68°F DB)
Outdoor Air Inlet Temperature: 7°C DB (45°FDB), 6°C WB (43°F WB)

2. The sound pressure level is based on following conditions: 1.5m beneath the unit.
The above data was measured in an anechoic chamber so that reflected sound should be taken into consideration in the field.

R32 | R410A

Mini 4-Way Cassette

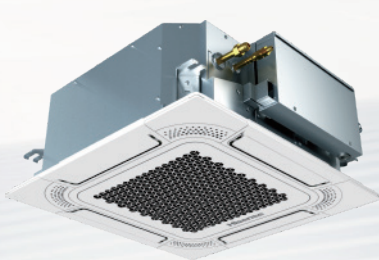

Model			AVC-05HJDBA	AVC-07HJDBA	AVC-09HJDBA	AVC-12HJDBA	AVC-15HJDBA	AVC-17HJDBA	AVC-19HJDBA
Power supply			AC 1 Φ, 220V~240V/50Hz/60Hz						
Capacity	Cooling	kW	1.5	2.2	2.8	3.6	4.5	5.0	5.6
		Btu/h	5,100	7,500	9,600	12,300	15,300	17,000	19,100
	Heating	kW	2.0	2.5	3.3	4.2	5.0	5.6	6.3
		Btu/h	6,800	8,500	11,200	14,300	17,000	19,100	21,500
Power Input	Cooling	W	14	14	14	16	22	30	40
	Heating	W	14	14	14	16	22	30	40
Sound Pressure	dB(A)		30/29/28/26	30/29/28/26	32/30/28/26	34/32/29/26	38/36/31/28	42/39/36/31	45/42/38/34
Air Flow Rate	m³/min		7.2/6.5/6.2/5.6	7.2/6.5/6.2/5.6	7.8/7.2/6.5/5.8	7.8/7.2/6.5/5.8	9.3/8.7/7.1/6.7	11.0/9.5/8.7/7.1	12.5/10.8/9.3/8.0
Piping	Connection Type	—	Flare-nut Connection(with Flare Nuts)						
	Liquid	mm	Φ6.35	Φ6.35	Φ6.35	Φ6.35	Φ6.35	Φ6.35	Φ6.35
		inch	(1/4)	(1/4)	(1/4)	(1/4)	(1/4)	(1/4)	(1/4)
	Gas	mm	Φ12.7	Φ12.7	Φ12.7	Φ12.7	Φ12.7	Φ12.7	Φ12.7
		inch	(1/2)	(1/2)	(1/2)	(1/2)	(1/2)	(1/2)	(1/2)
Weight	Condensate Drain	—	O.D. 32						
	Net Weight	kg	14.5	14.5	14.8	14.8	15.8	15.8	15.8
	Gross Weight	kg	17.3	17.3	17.6	17.6	18.6	18.6	18.6
Dimensions	External	H mm	215	215	215	215	215	215	215
		W mm	570	570	570	570	570	570	570
		D mm	570	570	570	570	570	570	570
	Packaging	H mm	292	292	292	292	292	292	292
		W mm	730	730	730	730	730	730	730
		D mm	668	668	668	668	668	668	668
Decoration Panel	Model	—	HPE-DNK1						
	Color	—	Neutral White						
	Body Dimensions	H mm	37	37	37	37	37	37	37
		W mm	620	620	620	620	620	620	620
		D mm	620	620	620	620	620	620	620
	Packaging Dimensions	H mm	115	115	115	115	115	115	115
		W mm	690	690	690	690	690	690	690
		D mm	680	680	680	680	680	680	680
	Net Weight	kg	2.7	2.7	2.7	2.7	2.7	2.7	2.7
	Gross Weight	kg	4.0	4.0	4.0	4.0	4.0	4.0	4.0

- Notes:
1. The nominal cooling capacity and heating capacity are based on following conditions:
Cooling Operation Conditions
Indoor Air Inlet Temperature: 27°C DB (80°F DB), 19.0°C WB (66.2°F WB)
Outdoor Air Inlet Temperature: 35°C DB (95°F DB)
Piping Length: 7.5 Meters Piping Lift: 0 Meter
Heating Operation Conditions
Indoor Air Inlet Temperature: 20°C DB (68°F DB)
Outdoor Air Inlet Temperature: 7°C DB (45°F DB), 6°C WB (43°F WB)

2. The sound pressure level is based on following conditions: 1.5m beneath the unit.
The above data was measured in an anechoic chamber so that reflected sound should be taken into consideration in the field.

1-Way Cassette


Seamless Integration

The one-way cassette unit features a minimalist and elegant design that seamlessly integrates with indoor decor. Its compact body not only saves space but also effectively directs airflow, making it ideal for installation in confined spaces.




Space Saving

Slim body height of 192mm fits in limited ceiling spaces commonly seen in budget hotels and residential applications.

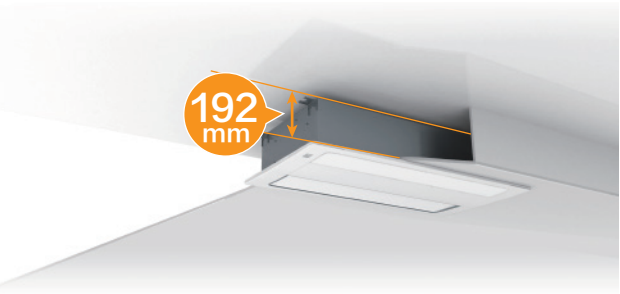

Even Air Supply

The louvers are composed of horizontal and vertical slats to evenly distribute air. With adjustable angles ranging from 17° to 65° , it effectively direct air further and downward to the floor, which is especially beneficial during heating mode.

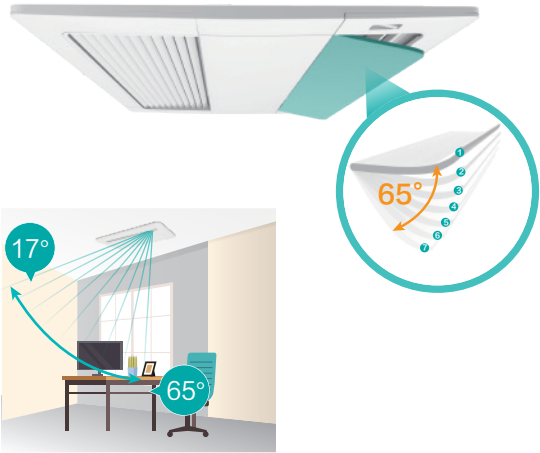


Easier Maintenance

The electrical box is located at the bottom of the unit, allowing easy access to the PCB by simply removing the panel and box cover. This design simplifies commissioning and maintenance, streamlining the process and reducing both time and costs.



1-Way Cassette

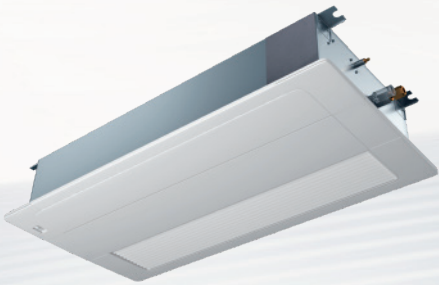

Model			AVY-07UXJSJA	AVY-09UXJSJA	AVY-12UXJSJA	AVY-14UXJSJA	AVY-18UXJSKA	AVY-24UXJSKA
Power Supply			AC 1Φ, 220~240V/50Hz/60Hz					
Capacity	Cooling	kW	2.2	2.8	3.6	4.5	5.6	7.1
		Btu/h	7,500	9,600	12,300	15,400	19,100	24,200
	Heating	kW	2.5	3.2	4.0	5.0	6.3	8.0
		Btu/h	8,500	10,900	13,600	17,100	21,500	27,300
Power Input	Cooling	W	14	14	24	34	34	74
	Heating	W	14	24	34	44	44	94
Sound Pressure		dB(A)	33/32/31/30/29/28	35/34/32/31/29/28	40/36/35/33/30/29	40/36/35/33/30/29	41/39/36/35/33/31	48/46/43/40/37/33
Airflow Rate		m³/min	6.2/5.9/5.6/ 5.1/4.8/4.6	6.6/6.2/5.6/ 5.1/4.8/4.6	8.3/7.3/6.8/ 6.2/5.6/5.1	8.3/7.3/6.8/ 6.2/5.6/5.1	12.1/9.9/8.8/ 8.2/7.8/6.6	15.6/12.6/11.2/ 9.9/8.4/7.1
Connection Type		—	Flare-nut Connection (with Flare Nuts)					
Piping	Liquid	mm	Φ6.35	Φ6.35	Φ6.35	Φ6.35	Φ6.35	Φ9.53
		inch	1/4	1/4	1/4	1/4	1/4	3/8
	Gas	mm	Φ12.70	Φ12.70	Φ12.70	Φ12.70	Φ15.88	Φ15.88
		inch	1/2	1/2	1/2	1/2	5/8	5/8
	Condensate Drain		mm	I.D.32				
Weight	Net Weight	kg	19	19	20	20	24	24
	Gross Weight	kg	23	23	24	24	29	29
Dimensions	External	H mm	192	192	192	192	192	192
		W mm	910	910	910	910	1180	1180
		D mm	470	470	470	470	470	470
	Packaging	H mm	268	268	268	268	268	268
		W mm	1136	1136	1136	1136	1406	1406
		D mm	574	574	574	574	574	574
Decoration Panel	Model	—	HP-D-NA	HP-D-NA	HP-D-NA	HP-D-NA	HP-E-NA	HP-E-NA
	Panel Colour	—	Neutral White					
	Body Dimensions	H mm	55	55	55	55	55	55
		W mm	1100	1100	1100	1100	1370	1370
		D mm	550	550	550	550	550	550
	Packaging Dimensions	H mm	130	130	130	130	130	130
		W mm	1160	1160	1160	1160	1430	1430
		D mm	610	610	610	610	610	610
	Net Weight	kg	5	5	5	5	6	6
	Gross Weight	kg	8	8	8	8	10	10


Notes:

1. The nominal cooling capacity is based on the following conditions:
Indoor Air Inlet Temperature: 27°C DB (80°F DB), 19.0°C WB (66.2°F WB)
Outdoor Air Inlet Temperature: 35°C DB (95°F DB)
Piping Length: 7.5 Meters Piping Lift: 0 Meter
2. The sound pressure level is based on the following conditions: 1.0m beneath the unit, 1.0m from Discharge Grille. The above data was measured in an anechoic chamber so that the reflected sound should be taken into consideration in the field. When bottom air inlet is adopted, the sound pressure will increase according to factors such as installation mode and the room structure.

2-Way Cassette


Compact and Classy Design

The slim design of the unit, with a height as low as 298mm, allows for easy installation in tight ceiling spaces, such as corridors and other restricted areas.

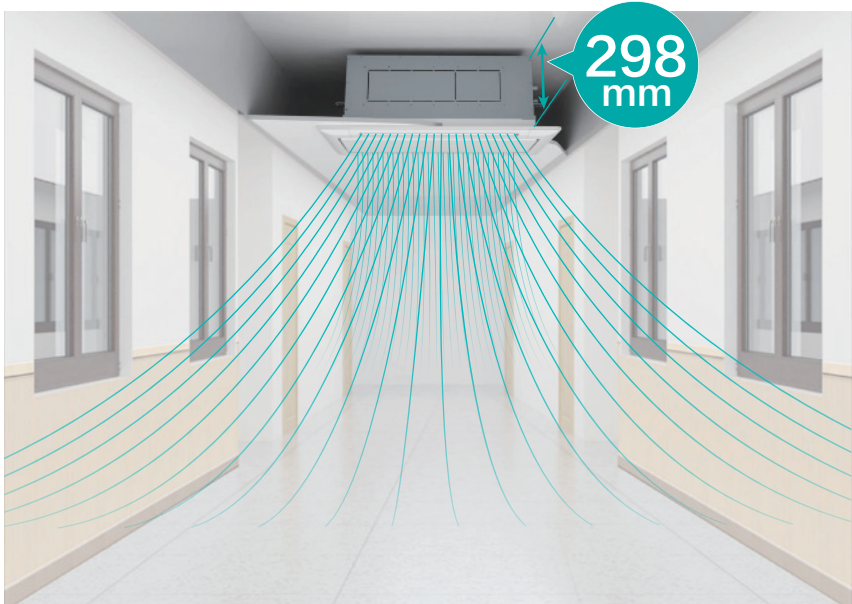


Independent Louvers Control

Each louver can be individually adjusted to one of seven angles, ranging from 27° to 84°. This feature is designed to meet the demands of spaces with high ceilings or narrow corridors, ensuring optimal airflow and adapting to various indoor layouts.

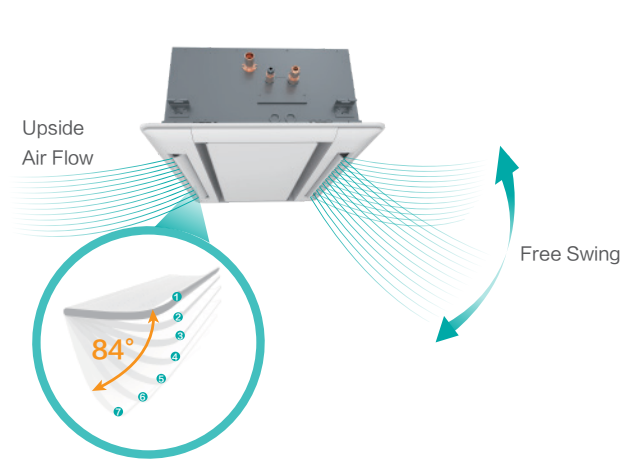

Branch Discharge Option

In irregular room layouts, branch discharge could come in handy by extending air distribution area to the most awkward corners without additional indoor units.

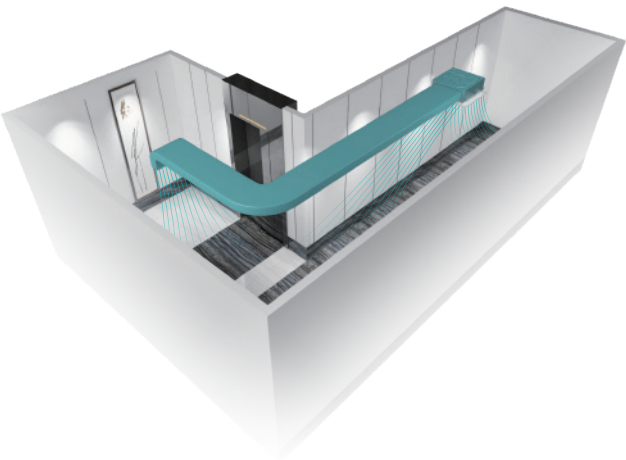

2-Way Cassette



Model			AVL-07 UXJSGA	AVL-09 UXJSGA	AVL-12 UXJSGA	AVL-14 UXJSGA	AVL-18 UXJSGA	AVL-24 UXJSGA	AVL-27 UXJSGA	AVL-30 UXJSGA	AVL-38 UXJSHA	AVL-48 UXJSHA	AVL-54 UXJSHA	
Power Supply			AC 1 ϕ, 220-240V/50Hz/60Hz											
Capacity	Cooling	kW	2.2	2.8	3.6	4.3	5.6	7.1	8.4	9.0	11.2	14.0	16.0	
		Btu/h	7,500	9,600	12,300	14,700	19,100	24,200	28,700	30,700	38,200	47,800	54,600	
	Heating	kW	2.8	3.3	4.0	4.9	6.5	8.0	9.0	10.0	13.0	16.0	18.0	
		Btu/h	9,600	11,300	13,600	16,700	22,200	27,300	30,700	34,100	44,400	54,600	61,400	
Power Input	Cooling	W	14	14	14	24	34	44	64	74	84	104	114	
	Heating	W	14	14	14	24	34	44	64	74	84	104	114	
Sound Pressure		dB(A)	32/30/ 29/27	33/30/ 29/28	34/31/ 30/28	40/37/ 34/32	42/39/ 36/33	45/42/ 40/36	47/44/ 40/36	49/46/ 42/37	46/44/ 40/38	48/45/ 42/38	49/46/ 43/40	
Airflow Rate		m³/min	10.0/8.5/ 7.2/6.0	11.0/9.4/ 8.2/6.6	12.0/10.5/ 8.9/7.5	15.0/13.2/ 11.5/9.9	17.0/14.9/ 13.0/11.2	19.0/16.4/ 14.3/12.3	21.0/18.4/ 15.6/12.6	22.0/19.3/ 16.3/13.1	30.0/26.4/ 23.1/19.8	35.0/30.8/ 26.9/21.1	37.0/32.5/ 28.4/24.1	
Connection Type		-	Flare-nut Connection (with Flare Nuts)											
Piping	Liquid	mm	ϕ6.35	ϕ6.35	ϕ6.35	ϕ6.35	ϕ6.35	ϕ9.53	ϕ9.53	ϕ9.53	ϕ9.53	ϕ9.53	ϕ9.53	
		inch	1/4	1/4	1/4	1/4	1/4	3/8	3/8	3/8	3/8	3/8	3/8	
	Gas	mm	ϕ12.70	ϕ12.70	ϕ12.70	ϕ12.70	ϕ12.70	ϕ15.88	ϕ15.88	ϕ15.88	ϕ15.88	ϕ15.88	ϕ15.88	ϕ15.88
		inch	1/2	1/2	1/2	1/2	1/2	5/8	5/8	5/8	5/8	5/8	5/8	5/8
	Condensate Drain		mm	I.D.32										
Weight	Net Weight	kg	22	22	22	24	24	24	24	24	39	39	39	
	Gross Weight	kg	28	28	28	30	30	30	30	30	47	47	47	
Dimensions	External	H mm	298	298	298	298	298	298	298	298	298	298	298	
		W mm	860	860	860	860	860	860	860	860	1420	1420	1420	
		D mm	630	630	630	630	630	630	630	630	630	630	630	
	Packaging	H mm	350	350	350	350	350	350	350	350	350	350	350	
		W mm	1070	1070	1070	1070	1070	1070	1070	1070	1630	1630	1630	
		D mm	710	710	710	710	710	710	710	710	710	710	710	710
Decoration Panel	Model		HP-C-NA	HP-C-NA	HP-C-NA	HP-C-NA	HP-C-NA	HP-C-NA	HP-C-NA	HP-C-NA	HP-C-NA	HP-F-NA	HP-F-NA	
	Panel Colour		-	Neutral White										
	Body Dimensions	H mm	30	30	30	30	30	30	30	30	30	30	30	
		W mm	1100	1100	1100	1100	1100	1100	1100	1100	1100	1660	1660	1660
		D mm	710	710	710	710	710	710	710	710	710	710	710	710
	Packaging Dimensions	H mm	160	160	160	160	160	160	160	160	160	160	160	160
		W mm	1170	1170	1170	1170	1170	1170	1170	1170	1170	1710	1710	1710
		D mm	740	740	740	740	740	740	740	740	740	740	740	740
	Net Weight		kg	7.5	7.5	7.5	7.5	7.5	7.5	7.5	7.5	10.5	10.5	10.5
	Gross Weight		kg	13.3	13.3	13.3	13.3	13.3	13.3	13.3	13.3	17.8	17.8	17.8

Notes:


1. The nominal cooling capacity is based on the following conditions:
Indoor Air Inlet Temperature: 27°C DB (80°F DB), 19.0°C WB (66.2°F WB)
Outdoor Air Inlet Temperature: 35°C DB (95°F DB)
Piping Length: 7.5 Meters Piping Lift: 0 Meter

2. The sound pressure level is based on the following conditions: 1.5m beneath the unit.
The above data was measured in an anechoic chamber so that the reflected sound should be taken into consideration in the field.

Console

Stylish Design


The console unit is stylish with a sleek white cover, integrated LED indicators, and a temperature display. It is ideal for both residential and commercial applications where installation on or near the floor is required.

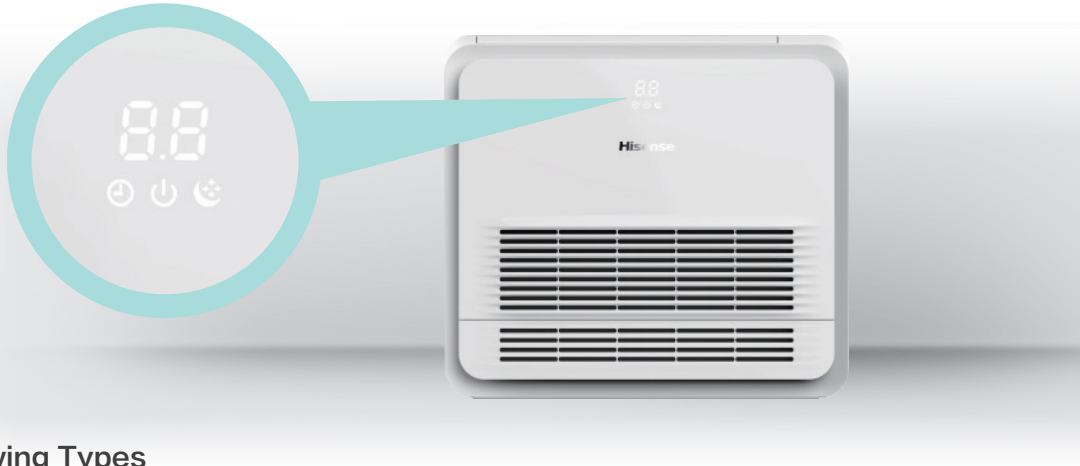

Multiple Blowing Types

Cooling Mode

The unit adopts the stereo cooling mode that can reach the setting temperature rapidly.

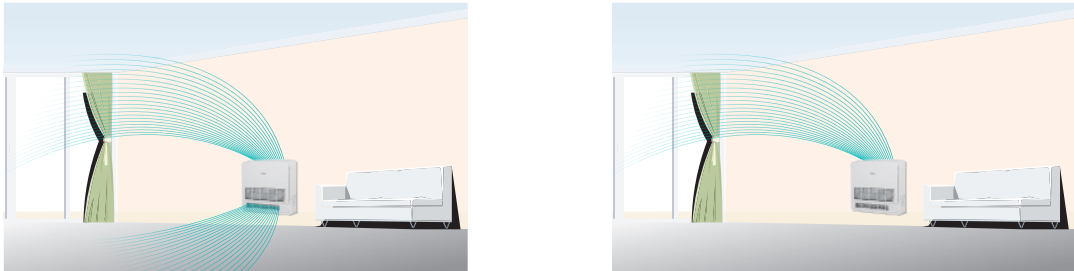

*Note: During cooling mode, the lower air louver will close automatically after the indoor unit operates in low fan speed mode for an hour. Otherwise it will keep open.

Heating Mode

Air supply through the below louver achieves floor heating effect and increases the comfort.



*Note: In the Eco mode, when the indoor return air temp. is close to the setting temp., the upper air deflector is automatically closed, and the lower air outlet mode is activated.

Flexible Installation Options


The unit can be placed on the floor or hanged on the wall, and offers flexibility with surface-mounted, embedded, or concealed installation options.



Standing on the floor



Hanging on the wall

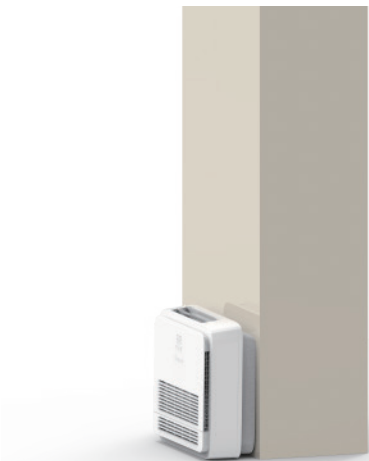

Surface mounted




Embedded



Concealed

Flexible Piping Connection

The refrigerant and drainage piping can be connected in any direction, including left, right, bottom, and back, providing extra installation flexibility.

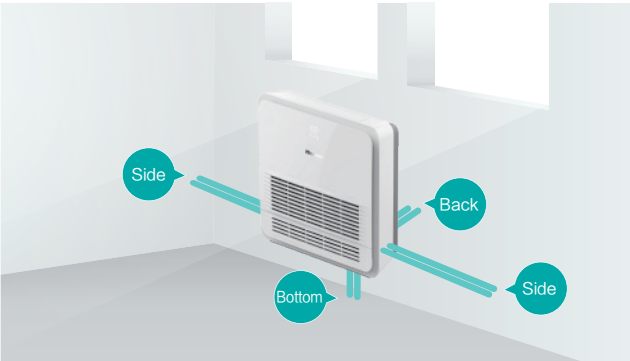

Console



Model			AVK-05HJFCAA	AVK-07HJFCAA	AVK-09HJFCAA	AVK-12HJFCAA	AVK-15HJFCAA	AVK-17HJFCAA
Power Supply			AC 1 Φ, 220V~240V/50Hz/60Hz					
Capacity	Cooling	kW	1.5	2.2	2.8	3.6	4.5	5.0
		Btu/h	5,100	7,500	9,600	12,300	15,300	17,000
	Heating	kW	2.0	2.5	3.3	4.2	5.0	5.6
		Btu/h	6,800	8,500	11,200	14,300	17,000	19,100
Power Input	Cooling	W	10	11	12	14	18	23
	Heating	W	10	11	12	14	18	23
Sound Pressure		dB(A)	32/30/29/28/26/24	34/32/31/29/27/26	36/35/32/31/29/27	39/36/34/31/29/27	41/39/37/35/33/32	44/43/41/39/37/36
Airflow Rate		m³/min	6.0/5.7/5.3/	7.4/7.0/6.4/	8.0/7.4/7.0/	8.2/7.6/6.8/	9.0/8.5/7.8/	10.1/9.7/9.0/
			5.1/4.7/4.5	6.0/5.6/5.3	6.4/6.0/5.6	6.2/5.7/5.3	7.2/6.6/6.4	8.5/7.9/7.3
Panel Colour		—	Pure White	Pure White	Pure White	Pure White	Pure White	Pure White
Piping	Connection Type		Flare-nut Connection (with Flare Nuts)					
	Liquid	mm	Φ 6.35	Φ 6.35	Φ 6.35	Φ 6.35	Φ 6.35	Φ 6.35
		inch	1/4	1/4	1/4	1/4	1/4	1/4
	Gas	mm	Φ 12.70	Φ 12.70	Φ 12.70	Φ 12.70	Φ 12.70	Φ 12.70
		inch	1/2	1/2	1/2	1/2	1/2	1/2
	Condensate Drain		mm	O.D.18				
Weight	Net Weight	kg	16.1	16.1	16.1	17.4	17.4	17.4
	Gross Weight	kg	20.6	21.1	21.1	21.5	21.5	21.5
Dimensions	External	H mm	630	630	630	630	630	630
		W mm	700	700	700	700	700	700
		D mm	225	225	225	225	225	225
	Packaging	H mm	725	725	725	725	725	725
		W mm	790	790	790	790	790	790
		D mm	315	315	315	315	315	315

Notes:


1. The nominal cooling capacity and heating capacity are based on the following conditions:
Cooling Operation Conditions
Indoor Air Inlet Temperature: 27°C DB (80°F DB), 19.0°C WB (66.2°F WB)
Outdoor Air Inlet Temperature: 35°C DB (95°F DB)
Piping Length: 7.5 Meters Piping Lift: 0 Meter
Heating Operation Conditions
Indoor Air Inlet Temperature: 20°C DB (68°F DB)
Outdoor Air Inlet Temperature: 7°C DB (45°F DB), 6°C WB (43°F WB)

2. The sound pressure level is based on following conditions:
It is measured in anechoic room. Operation noise differs with operation and ambient conditions.
Location of Microphone:

Ceiling Ducted (AC/DC Low Height)


Space Saving

Concealed AC/DC Low Height Ducted unit is as slim as 192mm, fitting into the narrowest ceiling spaces. Save ceiling spaces for higher room height without compromising user's comfort and satisfaction.

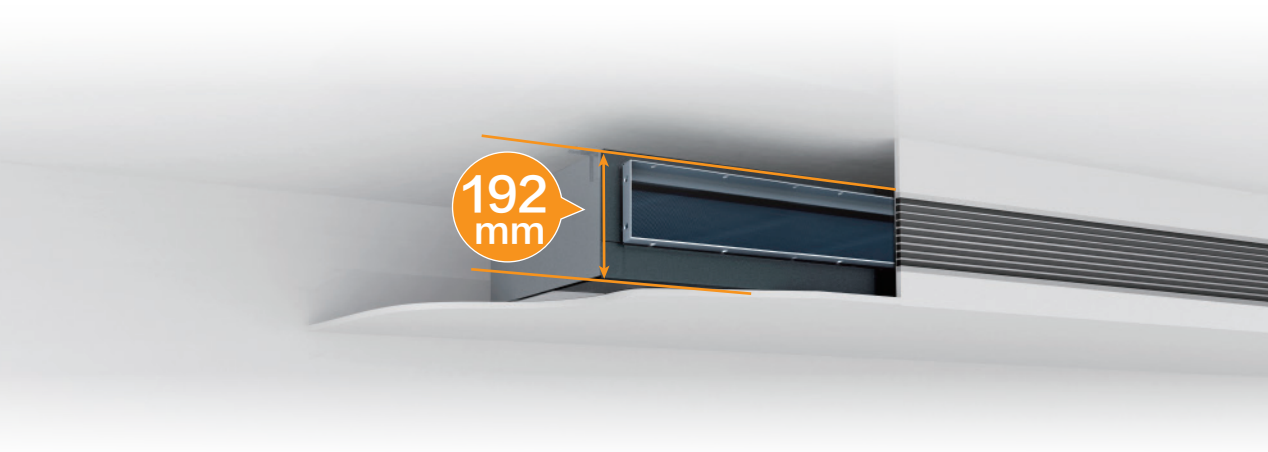

3D Air Flow

Classy air discharge louver panel with LED temperature and humidity display is available as an optional accessory for the AC low-height ceiling ducted units. The 3D louvers on the panel offer wide air flow coverage to keep every corners of your room cool or warm in any seasons of the year.

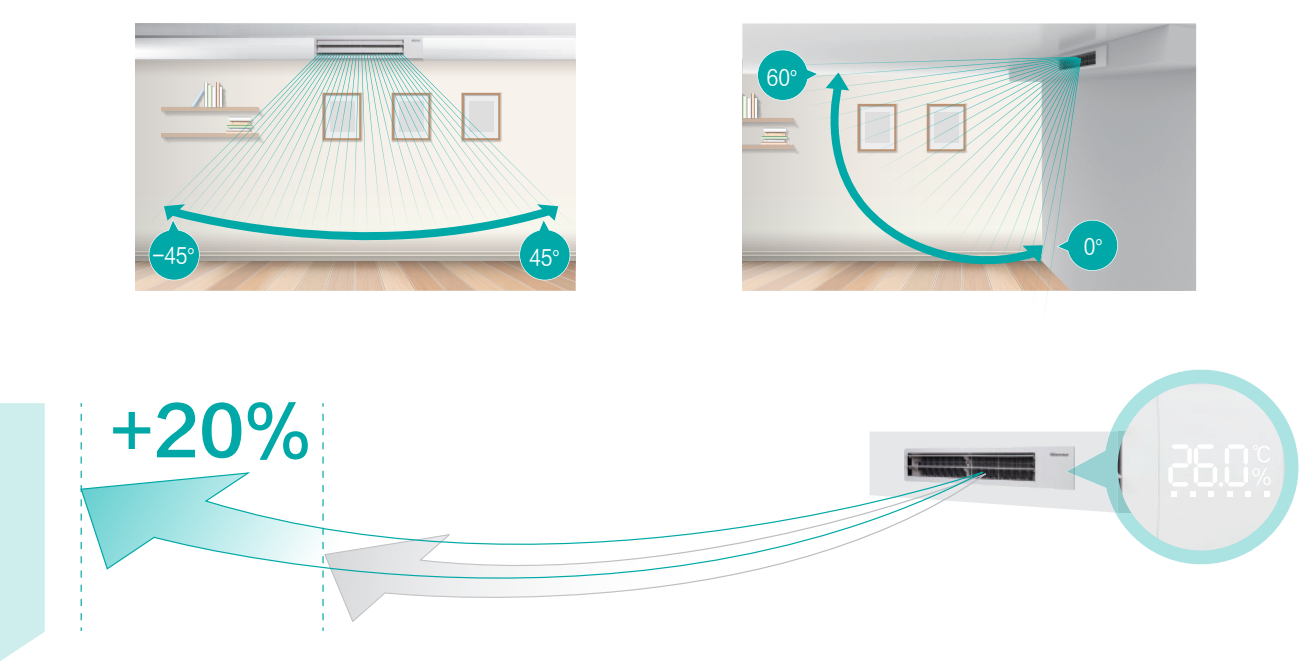

Ceiling Ducted (AC Low Height)



Model			AVE-05 HCFRL	AVE-07 HCFRL	AVE-09 HCFRL	AVE-12 HCFRL	AVE-15 HCFRL	AVE-17 HCFRL	AVE-19 HCFRL	AVE-22 HCFRL	AVE-24 HCFRL
Power Supply			AC 1 Φ , 220V~240V/50Hz								
Capacity	Cooling	kW	1.7	2.2	2.8	3.6	4.5	5.0	5.6	6.3	7.1
		Btu/h	5,800	7,500	9,600	12,300	15,300	17,100	19,100	21,500	24,200
	Heating	kW	1.9	2.5	3.2	4.0	5.0	5.6	6.3	7.1	8.0
		Btu/h	6,500	8,500	11,300	13,600	17,100	19,100	21,500	24,200	27,300
Power Input	Cooling	W	50	50	70	70	80	80	100	120	120
	Heating	W	50	50	70	70	80	80	100	120	120
Sound Pressure		dB(A)	29/24/22	29/24/22	35/25/23	35/25/23	36/25/23	36/25/23	35/25/23	39/26/25	39/26/25
Airflow Rate		m³/min	7/5.5/4.7	7/5.5/4.7	9/5.7/4.8	9/5.7/4.8	12/6.3/5.5	12/6.3/5.5	13.5/8/7.7	18/9.3/8.7	18/9.3/8.7
External Static Pressure		Pa	10(30)	10(30)	10(30)	10(30)	10(30)	10(30)	10(30)	10(30)	10(30)
Piping	Connection Type		Flare-nut Connection (with Flare Nuts)								
	Liquid	mm	Φ 6.35	Φ 6.35	Φ 6.35	Φ 6.35	Φ 6.35	Φ 6.35	Φ 6.35	Φ 9.53	Φ 9.53
		inch	1/4	1/4	1/4	1/4	1/4	1/4	1/4	3/8	3/8
	Gas	mm	Φ 12.70	Φ 12.70	Φ 12.70	Φ 12.70	Φ 12.70	Φ 12.70	Φ 15.88	Φ 15.88	Φ 15.88
		inch	1/2	1/2	1/2	1/2	1/2	1/2	5/8	5/8	5/8
	Condensate Drain		mm	I.D.32							
Weight	Net Weight	kg	16	16	17	17	21	21	25	26	26
	Gross Weight	kg	19	19	20	20	24	24	29	29	29
Dimensions	External	H mm	192	192	192	192	192	192	192	192	192
		W mm	700	700	700	700	910	910	1180	1180	1180
		D mm	447	447	447	447	447	447	447	447	447
	Packaging	H mm	270	270	270	270	270	270	270	270	270
		W mm	925	925	925	925	1136	1136	1406	1406	1406
		D mm	574	574	574	574	574	574	574	574	574
	Dimensions	H mm	192	192	192	192	192	192	192	192	192
		W mm	700	700	700	700	910	910	1180	1180	1180

- Notes:
1. The nominal cooling capacity and heating capacity are based on the following conditions:
Cooling Operation Conditions
Indoor Air Inlet Temperature: 27°C DB (80°F DB), 19.0°C WB (66.2°F WB)
Outdoor Air Inlet Temperature: 35°C DB (95°F DB)
Piping Length: 7.5 Meters Piping Lift: 0 Meter
Heating Operation Conditions
Indoor Air Inlet Temperature: 20°C DB (68°F DB)
Outdoor Air Inlet Temperature: 7°C DB (45°F DB), 6°C WB (43°F WB)

2. The sound pressure level is based on the following conditions: 1.5m beneath the unit.
The above data was measured in an anechoic chamber so that the reflected sound should be taken into consideration in the field.

R32 | R410A

Ceiling Ducted (DC Low Height)



Model			AVE-05HJDDH	AVE-07HJDDH	AVE-09HJDDH	AVE-12HJDDH	AVE-15HJDDH	AVE-19HJDDH	AVE-24HJDDH
Power supply			AC 1 Φ , 220V~240V/50Hz/60Hz						
Capacity	Cooling	kW	1.7	2.2	2.8	3.6	4.5	5.6	7.1
		Btu/h	5,800	7,500	9,600	12,300	15,300	19,100	24,200
	Heating	kW	1.9	2.5	3.2	4.0	5.0	6.3	8.0
		Btu/h	6,500	8,500	11,300	13,600	17,100	21,500	27,300
Power Input	Cooling	W	30	30	50	50	60	60	90
	Heating	W	30	30	50	50	60	60	90
Sound Pressure		dB(A)	28/27/26/24/23/21	28/27/26/24/23/21	35/32/32/30/26/23	35/32/32/30/26/23	35/32/32/30/26/23	35/32/30/28/25/23	38/36/35/33/31/24
Air Flow Rate		m³/min	7.0/6.5/6.1/ 5.7/5/3/4.8	7.0/6.5/6.1/ 5.7/5/3/4.8	9.0/8.1/7.3/ 6.7/5.9/5.2	9.0/8.1/7.3/6.7/ 5.9/5.2	12.0/10.8/9.4/ 8.1/6.8/5.5	13.5/12.5/11.2/ 10.0/8.8/7.7	18.0/16.1/14.3/ 12.3/10.5/8.7
External Static Pressure		Pa	10(10~30~50)						
Piping	Connection Type	—	Flare-nut Connection(with Flare Nuts)						
	Liquid	mm	Φ 6.35	Φ 6.35	Φ 6.35	Φ 6.35	Φ 6.35	Φ 6.35	Φ 9.53
		inch	1/4	1/4	1/4	1/4	1/4	1/4	3/8
	Gas	mm	Φ 12.7	Φ 12.7	Φ 12.7	Φ 12.7	Φ 12.7	Φ 15.88	Φ 15.88
		inch	1/2	1/2	1/2	1/2	1/2	5/8	5/8
	Condensate Drain	—	I.D.32						
Weight	Net Weight	kg	16	16	17	17	20	24	24
	Gross Weight	kg	19	19	20	20	24	29	29
Dimensions	External Dimension	H	mm	192	192	192	192	192	192
		W	mm	700	700	700	700	910	1180
		D	mm	447	447	447	447	447	447
	Packaging Dimensions	H	mm	270	270	270	270	270	270
		W	mm	925	925	925	925	1136	1406
		D	mm	574	574	574	574	574	574


- Notes:
1. The nominal cooling capacity and heating capacity are based on the following conditions:
Cooling Operation Conditions
Indoor Air Inlet Temperature: 27°C DB (80°F DB), 19.0°C WB (66.2°F WB)
Outdoor Air Inlet Temperature: 35°C DB (95°F DB)
Piping Length: 7.5 Meters Piping Lift: 0 Meter
Heating Operation Conditions
Indoor Air Inlet Temperature: 20°C DB (68°F DB)
Outdoor Air Inlet Temperature: 7°C DB (45°F DB), 6°C WB (43°F WB)

2. The sound pressure level is based on the following conditions: 1.5m beneath the unit.
The above data was measured in an anechoic chamber so that the reflected sound should be taken into consideration in the field.


Ceiling Ducted(High/Low Static Pressure)

Auto-adjust External Static Pressure

After installation, the actual duct resistance frequently differ from the initially calculated, causing the actual air flow too low or too high. The auto-adjust ESP function can effectively solve this problem. At the initial commission, the system can automatically select the most appropriate ESP value according to the actual duct resistance.

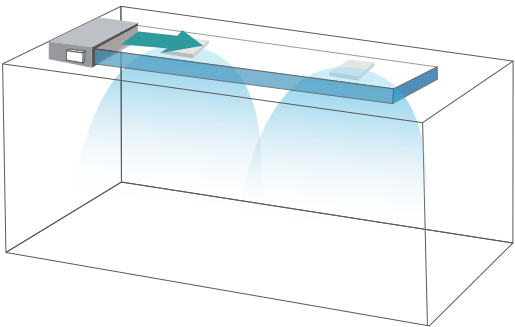


Auto-adjust Low ESP

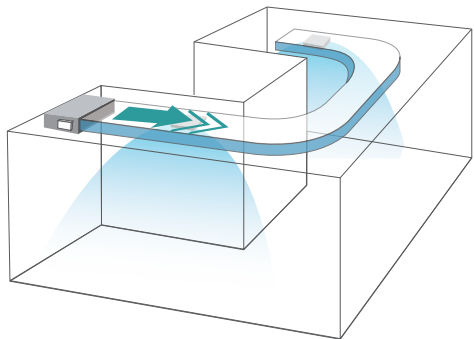

Auto-adjust High ESP


Comfort Cooling Mode

The indoor unit can achieve comfort cooling by setting three levels of air temperature (cooler/comfort/warmer)through the wired controller. The system compares the actual air temperature with the set temperature on the controller and intelligently adjusts its operating frequency to ensure a comfortable environment for the user.

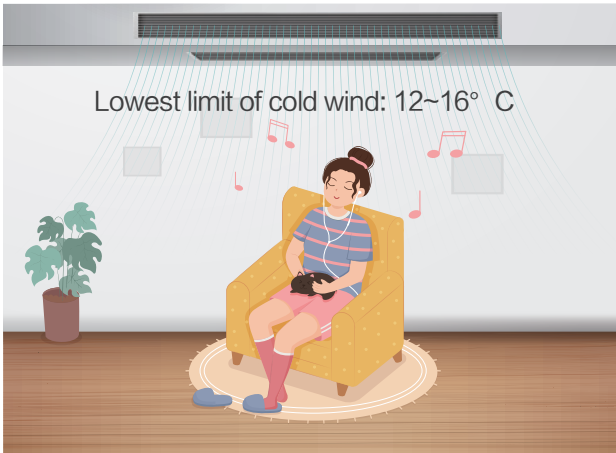

Various Device Connection Options

Third party devices to control the on-off air conditioners is possible with dry contact connections to the Indoor unit. Devices like room key card, window contact and fire alarms can be connected simultaneously.

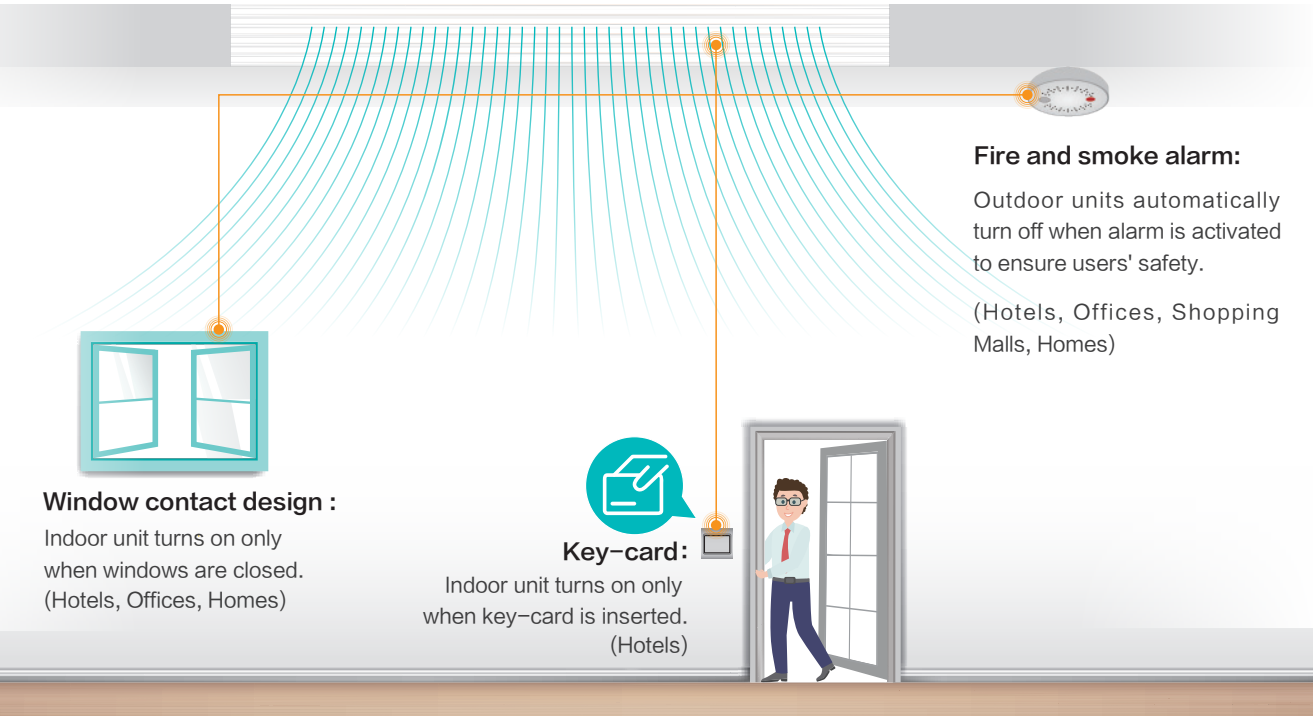


Precise Temperature Control

Two temperature sensor are installed into the unit to send real-time signals to the controllers for a more precise temperature control.



Hisense VRF

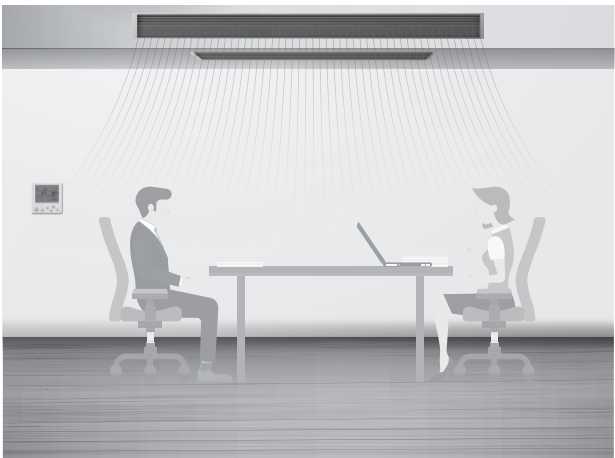

Conventional

Self-cleaning Function

The unit is featured with self-cleaning function. With just a press on the controller, the unit cleans itself automatically without manual intervention. It not only ensures clean and healthy air supply but also saves your valuable time and cost.




New Improved Bendable Filters

Standard filters that comes with high/low static pressure ceiling ducted are now optimized to be bendable by improving the material's malleability to improve installation flexibility in narrow ceiling height and restricted spaces.



Fresh Air Introducing

There is a fresh air duct opening reserved in the unit for 10% free fresh air introduced directly from outdoor, providing fresh air to the indoor continuously.

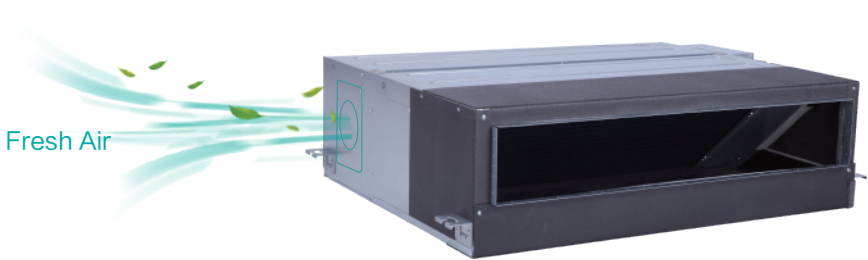

R32 | R410A

Ceiling Ducted
(DC High Static Pressure)



Model			AVD-07 HJDH	AVD-09 HJDH	AVD-12 HJDH	AVD-15 HJDH	AVD-19 HJDH	AVD-24 HJDH	AVD-24 HJDH1	AVD-30 HJDH	AVD-38 HJDH	AVD-42 HJDH	AVD-48 HJDH	AVD-54 HJDH	AVD-76 HJDH	AVD-96 HJDH	
Power Supply			AC 1ϕ, 220V~240V/50Hz/60Hz														
Capacity	Cooling	kW	2.2	2.8	3.6	4.5	5.6	7.1	7.1	9.0	11.2	12.5	14.0	16.0	22.4	28.0	
		Btu/h	7,500	9,600	12,300	15,400	19,100	24,200	24,200	30,800	38,000	42,000	48,000	54,500	76,500	95,600	
	Heating	kW	2.5	3.2	4.0	4.6	6.3	8.0	8.0	10.0	12.5	14	16.0	18.0	25.0	31.5	
		Btu/h	8,500	10,900	13,700	17,100	21,600	27,400	27,400	34,200	42,500	48,000	54,500	61,500	85,300	107,500	
Power Input	Cooling	W	40	40	55	55	55	82	74	100	132	180	180	223	610	830	
	Heating	W	40	40	55	55	55	82	74	100	132	180	180	223	610	830	
Sound Pressure Level		dB(A)	30/27/23/ 21/20/19	30/27/23/ 21/20/19	35/33/32/ 28/26/24	35/33/32/ 28/26/24	33/30/27/ 25/23/22	36/34/31/ 28/24/22	33/31/28/ 25/23/21	34/32/30/ 28/25/22	37/35/31/ 29/26/23	38/36/34/ 31/29/26	38/36/34/ 31/29/26	41/38/35/ 33/30/27	49/48/47/ 46/45/44	53/52/50/ 49/47/45	
Airflow Rate		m³/min	9/8/6.8/ 6.3/5.8/5.3	9/8/6.8/ 6.3/5.8/5.3	12/11/10/ 9/8/7.2	12/11/10/ 9/8/7.2	14.5/13/11.5/ 10.5/9.5/8.7	19/17/15/ 13/11/9.5	20.6/19/17/ 15/13.8/12.5	25/23/21/ 19/17/15	28/25/23/ 21/19/17	35.5/32.5/29.5/ 26.5/23.5/20.5	35.5/32.5/29.5/ 26.5/23.5/20.5	39/35.5/31/ 26.5/23.5/21.8	57/54/52/ 51/49/48	72/68/65/ 61/58/50	
External Static Pressure		Pa	30 (30/40/50/60/70/80/90/100/110/120/130/140/150)						50 (50/60/70/80/90/100/110/120/130/140/150/160/170/180/190/200)						150(50-250)	150(50-250)	
Piping	Connection Type	—	Flare-Nut Connection(With Flare Nut)												Brazing		
	Liquid	mm	ϕ6.35	ϕ6.35	ϕ6.35	ϕ6.35	ϕ6.35	ϕ9.53	ϕ9.53	ϕ9.53	ϕ9.53	ϕ9.53	ϕ9.53	ϕ9.53	ϕ9.53	ϕ9.53	ϕ9.53
		inch	1/4	1/4	1/4	1/4	1/4	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8
		mm	ϕ12.7	ϕ12.7	ϕ12.7	ϕ12.7	ϕ15.88	ϕ15.88	ϕ15.88	ϕ15.88	ϕ15.88	ϕ15.88	ϕ15.88	ϕ15.88	ϕ15.88	ϕ22.2 (ϕ19.05 ^{*1})	ϕ22.2
	Gas	inch	1/2	1/2	1/2	1/2	5/8	5/8	5/8	5/8	5/8	5/8	5/8	5/8	7/8 (3/4 ^{*1})	7/8	
		Condensate Drain	—	I.D. 32													
Weight	Net Weight	kg	23	23	24	24	30	30	40	40	40	49	49	49	104	104	
	Gross Weight	kg	29	29	30	30	37	37	48	48	48	57	57	57	125	125	
Dimensions	External	H mm	270	270	270	270	270	270	300	300	300	300	300	300	470	470	
		W mm	650+75	650+75	650+75	650+75	900+75	900+75	1100+75	1100+75	1100+75	1400+75	1400+75	1400+75	1250	1250	
		D mm	720	720	720	720	720	720	800	800	800	800	800	800	1120	1120	
	Packing	H mm	385	385	385	385	385	385	415	415	415	415	415	415	546	546	
		W mm	895	895	895	895	1140	1140	1345	1345	1345	1640	1640	1640	1466	1466	
		D mm	870	870	870	870	870	870	950	950	950	950	950	950	1270	1270	


Notes:

1. The nominal cooling capacity and heating capacity are based on the following conditions:
Cooling Operation Conditions
Indoor Air Inlet Temperature: 27° C DB(80° F DB), 19.0° C WB(66.2° F WB)
Outdoor Air Inlet Temperature: 35° C DB(95° F DB)
Heating Operation Conditions
Indoor Air Inlet Temperature: 20° C DB(68° F DB),
Outdoor Air Inlet Temperature: 7° C DB(45° F DB), 6° C WB(43° F WB)
Piping Length: 7.5 Meters Piping Lift: 0 Meter

2. The sound pressure level is based on following conditions.
1.5m below the unit; With 2.0m discharge duct and 1.0m return duct
The above data were measured in an anechoic chamber so that reflected sound should be taken into consideration in the field.

3. *1: The size of AVD-76" series gas pipe is ϕ22.2mm when leaving the factory, and the diameter can be changed to 19.05mm after welding the adapter pipe.

Ceiling Ducted
(High Static Pressure)

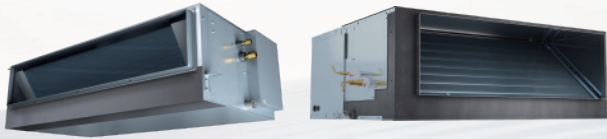

Model			AVD-07 HCFCH	AVD-09 HCFCH	AVD-12H CFCH	AVD-15H CFCH	AVD-19 HCFCH	AVD-22 HCFCH	AVD-24 HCFCH	AVD-27 HCFCH	AVD-30 HCFCH	AVD-38 HCFCH	AVD-48 HCFCH	AVD-54 HCFCH
Power Supply			AC 1 Φ, 220V~240V/50Hz											
Model			AVD-07 H3FCH	AVD-09 H3FCH	AVD-12 H3FCH	AVD-15 H3FCH	AVD-19 H3FCH	AVD-22 H3FCH	AVD-24 H3FCH	AVD-27 H3FCH	AVD-30 H3FCH	AVD-38 H3FCH	AVD-48 H3FCH	AVD-54 H3FCH
Power Supply			AC 1 Φ, 208~230V/60Hz											
Capacity	Cooling	kW	2.2	2.8	3.6	4.5	5.6	6.3	7.1	8.0	9.0	11.2	14.0	16.0
		Btu/h	7,500	9,600	12,300	15,400	19,100	21,600	24,200	27,400	30,800	38,000	48,000	54,500
	Heating	kW	2.5	3.2	4.0	5.0	6.3	7.1	8.0	9.0	10.0	12.5	16.0	18.0
		Btu/h	8,500	10,900	13,700	17,100	21,600	24,200	27,400	30,800	34,200	42,500	54,500	61,500
Power Input	Cooling	kW	0.10(0.13")	0.10(0.13")	0.13(0.16")	0.13(0.16")	0.14(0.21")	0.19(0.24")	0.19(0.24")	0.25(0.34")	0.25(0.34")	0.25(0.34")	0.34(0.45")	0.43(0.59")
	Heating	kW	0.10(0.13")	0.10(0.13")	0.13(0.16")	0.13(0.16")	0.14(0.21")	0.19(0.24")	0.19(0.24")	0.25(0.34")	0.25(0.34")	0.25(0.34")	0.34(0.45")	0.43(0.59")
Sound Pressure	220~240V/50Hz	dB(A)	32/27/25	32/27/25	35/32/26	35/32/26	36/35/30	39/32/25	39/32/25	42/39/34	42/39/34	42/39/34	43/40/35	46/40/35
	208V/60Hz	dB(A)	33/28/24	33/28/24	37/34/29	37/34/29	37/35/29	39/32/25	39/32/25	42/38/33	42/38/33	42/38/33	44/39/34	45/40/34
	230V/60Hz	dB(A)	37/33/28	37/33/28	40/38/33	40/38/33	42/40/34	43/37/30	43/37/30	44/42/37	44/42/37	44/42/37	47/43/38	46/42/38
Air Flow(Hi/Me/Lo)		m³/min	9/7/6	9/7/6	12/10/8.5	12/10/8.5	15/13/10	19/14/10	19/14/10	28/24/19.5	28/24/19.5	28/24/19.5	35.5/29/24	39/31/24
External Static Pressure	220~240V/50Hz 208V/60Hz	Pa	50(80)	50(80)	50(80)	50(80)	50(80)	50(80)	50(80)	120(90)	120(90)	120(90)	120(90)	120(90)
	230V/60Hz	Pa	80(105)	80(105)	90(115)	90(115)	90(115)	90(115)	90(115)	170(150)	170(150)	170(150)	170(150)	170(150)
Piping	Connection Type		Flare-nut Connection (with Flare Nuts)											
	Liquid	mm	φ 6.35	φ 6.35	φ 6.35	φ 6.35	φ 6.35	φ 9.53	φ 9.53	φ 9.53	φ 9.53	φ 9.53	φ 9.53	φ 9.53
		inch	1/4	1/4	1/4	1/4	1/4	3/8	3/8	3/8	3/8	3/8	3/8	3/8
	Gas	mm	φ 12.70	φ 12.70	φ 12.70	φ 12.70	φ 15.88	φ 15.88	φ 15.88	φ 15.88	φ 15.88	φ 15.88	φ 15.88	φ 15.88
		inch	1/2	1/2	1/2	1/2	5/8	5/8	5/8	5/8	5/8	5/8	5/8	5/8
	Condensate Drain		I.D.32											
Weight	Net Weight	kg	25(24")	25(24")	25(24")	25(24")	30(31")	30(31")	30(31")	45(44")	45(44")	45(44")	53(50")	53(50")
	Gross Weight	kg	29(30")	29(30")	31(30")	31(30")	37(38")	37(38")	37(38")	52(52")	52(52")	52(52")	62(59")	62(59")
Dimensions	External	H mm	270	270	270	270	270	270	270	300	300	300	300	300
		W mm	650+75	650+75	650+75	650+75	900+75	900+75	900+75	1100+75	1100+75	1100+75	1400+75	1400+75
		D mm	720	720	720	720	720	720	720	800	800	800	800	800
	Packaging	H mm	385	385	385	385	385	385	385	415	415	415	415	415
		W mm	895	895	895	895	1140	1140	1140	1345	1345	1345	1640	1640
		D mm	870	870	870	870	870	870	870	950	950	950	950	950

Notes:


1.The nominal cooling capacity and heating capacity are based on the following conditions:
Cooling Operation Conditions
Indoor Air Inlet Temperature: 27°C DB (80°F DB), 19.0°C WB (66.2°F WB)
Outdoor Air Inlet Temperature: 35°C DB (95°F DB)
Piping Length: 7.5 Meters Piping Lift: 0 Meter
Heating Operation Conditions
Indoor Air Inlet Temperature: 20°C DB (68°F DB)
Outdoor Air Inlet Temperature: 7°C DB (45°F DB), 6°C WB (43°F WB)

2. The sound pressure level is based on the following conditions: 1.5m beneath the unit.
With discharge duct (2.0m) and return duct (1.0m).
The above data was measured in an anechoic chamber so that the reflected sound should be taken into consideration in the field.

3. When bottom air inlet is adopted, the sound pressure will increase according to factors such as installation mode and the room structure.

*1: The value noted *1 is the parameter of the indoor units with power supply 208~230V/60Hz.

Ceiling Ducted
(Low Static Pressure)

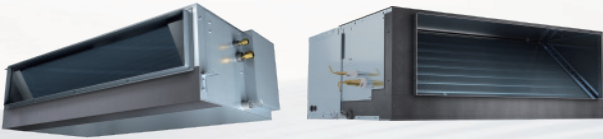

Model			AVD-07 HCFCL	AVD-09 HCFCL	AVD-12 HCFCL	AVD-15 HCFCL	AVD-19 HCFCL	AVD-22 HCFCL	AVD-24 HCFCL	AVD-27 HCFCL	AVD-30 HCFCL	AVD-38 HCFCL	AVD-48 HCFCL	AVD-54 HCFCL
Power Supply			AC 1 Φ, 220V~240V/50Hz											
Capacity	Cooling	kW	2.2	2.8	3.6	4.5	5.6	6.3	7.1	8.0	9.0	11.2	14.0	16.0
		Btu/h	7,500	9,600	12,300	15,400	19,100	21,600	24,200	27,400	30,800	38,000	48,000	54,500
	Heating	kW	2.5	3.2	4.0	5.0	6.3	7.1	8.0	9.0	10.0	12.5	16.0	18.0
		Btu/h	8,500	10,900	13,700	17,100	21,600	24,200	27,400	30,800	34,200	42,500	54,500	61,500
Power Input	Cooling	W	60	60	110	110	90	160	160	240	240	240	290	360
	Heating	W	60	60	110	110	90	160	160	240	240	240	290	360
Sound Pressure		dB(A)	27/23/21	27/23/21	34/30/25	34/30/25	32/30/26	35/28/24	35/28/24	38/33/30	38/33/30	38/33/30	41/38/33	44/39/33
Air Flow Rate (Hi/Me/Lo)		m³/min	9/7/6	9/7/6	12/10/8.5	12/10/8.5	15/13/10	19/14/10	19/14/10	28/24/19.5	28/24/19.5	28/24/19.5	35.5/29/24	39/31/24
External Static Pressure		Pa	30	30	30	30	30	30	30	60	60	60	60	60
Piping	Connection Type		Flare-nut Connection (with Flare Nuts)											
	Liquid	mm	φ 6.35	φ 6.35	φ 6.35	φ 6.35	φ 6.35	φ 9.53	φ 9.53	φ 9.53	φ 9.53	φ 9.53	φ 9.53	φ 9.53
		inch	1/4	1/4	1/4	1/4	1/4	3/8	3/8	3/8	3/8	3/8	3/8	3/8
	Gas	mm	φ 12.70	φ 12.70	φ 12.70	φ 12.70	φ 15.88	φ 15.88	φ 15.88	φ 15.88	φ 15.88	φ 15.88	φ 15.88	φ 15.88
		inch	1/2	1/2	1/2	1/2	5/8	5/8	5/8	5/8	5/8	5/8	5/8	5/8
	Condensate Drain		I.D.32											
Weight	Net Weight	kg	25	25	25	25	30	30	30	45	45	45	52	52
	Gross Weight	kg	31	31	31	31	36	37	37	52	52	52	61	61
Dimensions	External	H mm	270	270	270	270	270	270	270	300	300	300	300	300
		W mm	650+75	650+75	650+75	650+75	900+75	900+75	900+75	1100+75	1100+75	1100+75	1400+75	1400+75
		D mm	720	720	720	720	720	720	720	800	800	800	800	800
	Packaging	H mm	385	385	385	385	385	385	385	415	415	415	415	415
		W mm	895	895	895	895	1140	1140	1140	1345	1345	1345	1640	1640
		D mm	870	870	870	870	870	870	870	950	950	950	950	950

Notes:

1.The nominal cooling capacity and heating capacity are based on the following conditions:
Cooling Operation Conditions
Indoor Air Inlet Temperature: 27°C DB (80°F DB), 19.0°C WB (66.2°F WB)
Outdoor Air Inlet Temperature: 35°C DB (95°F DB)
Piping Length: 7.5 Meters Piping Lift: 0 Meter
Heating Operation Conditions
Indoor Air Inlet Temperature: 20°C DB (68°F DB)
Outdoor Air Inlet Temperature: 7°C DB (45°F DB), 6°C WB (43°F WB)


2. The sound pressure level is based on the following conditions: 1.5m beneath the unit.
With discharge duct (2.0m) and return duct (1.0m).
The above data was measured in an anechoic chamber so that the reflected sound should be taken into consideration in the field.

3. When bottom air inlet is adopted, the sound pressure will increase according to factors such as installation mode and the room structure.

Wall Mounted


High-efficiency DC Fan Motor

Equipped with a DC fan motor, the unit significantly reduces the power consumption by 60% compared to conventional AC products, ensuring low-cost operation.

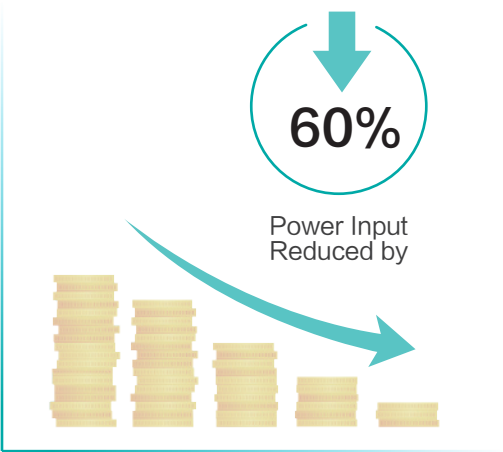

6 Fan Speed

6 indoor fan speeds are available to meet the needs of different indoor conditions.

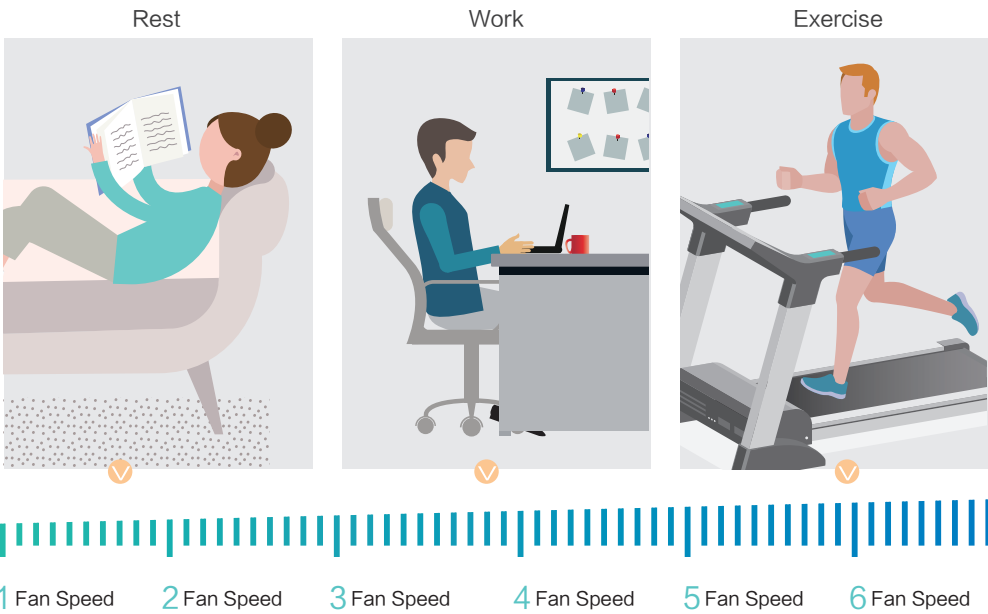

Self-cleaning Function

The unit is featured with self-cleaning function. With just a press on the controller, the unit cleans itself automatically without manual intervention. It not only ensures clean and healthy air supply but also saves your valuable time and cost.



R32 | R410A

Wall Mounted



Model			AVS-05 HJDTD	AVS-07 HJDTD	AVS-09 HJDTD	AVS-12 HJDTD	AVS-15 HJDTD	AVS-19 HJDTD	AVS-24 HJDTD	AVS-28 HJDTD
Power Supply			AC 1 ϕ, 220V~240V/50Hz/60Hz							
Capacity	Cooling	kW	1.7	2.2	2.8	3.6	4.5	5.6	7.1	8.4
		Btu/h	5,800	7,500	9,600	12,300	15,400	19,100	24,200	28,700
	Heating	kW	2.0	2.5	3.3	4.0	5.0	6.3	8.0	8.4
		Btu/h	6,500	8,500	11,300	13,700	17,100	21,500	27,300	28,700
Power Input	Cooling	W	20	20	20	30	20	30	50	80
	Heating	W	20	20	20	30	30	30	70	80
Sound Pressure		dB(A)	33/32/32/ 30/30/28	36/35/33/ 32/30/28	36/35/33/ 32/30/28	38/35/33/ 32/30/28	38/37/36/ 32/31/29	40/38/36/ 35/33/31	45/42/41/ 38/35/31	50/48/45/ 41/36/33
Airflow Rate		m³/min	8.7/8.3/8.2/ 7.5/7.2/7.0	9.8/9.2/8.7/ 8.2/7.5/7.0	9.8/9.2/8.7/ 8.2/7.5/7.0	10.3/9.2/8.7/ 8.2/7.5/7.0	11.5/11.0/10.3/ 9.0/8.7/8.0	16.2/15.0/14.2/ 13.3/12.2/11.5	20.0/18.0/17.0/ 15.0/13.3/11.7	23.3/22.0/20.0/ 17.0/14.2/12.2
Panel Colour		—	White							
Piping	Connection Type —		Flare-nut Connection(with Flare Nuts)							
	Liquid	mm	ϕ6.35	ϕ6.35	ϕ6.35	ϕ6.35	ϕ6.35	ϕ9.53	ϕ9.53	ϕ9.53
		inch	1/4	1/4	1/4	1/4	1/4	3/8	3/8	3/8
	Gas	mm	ϕ9.53	ϕ9.53	ϕ9.53	ϕ9.53	ϕ12.7	ϕ15.88	ϕ15.88	ϕ15.88
		inch	3/8	3/8	3/8	3/8	1/2	5/8	5/8	5/8
	Condensate Drain —		O.D. 22							
Weight	Net Weight	kg	9.5	9.5	9.5	9.5	13.0	14.4	14.4	14.4
	Gross Weight	kg	13.4	13.4	13.4	13.4	17.8	19.4	19.4	19.4
Dimensions	External Dimension	H mm	270	270	270	270	315	315	315	315
		W mm	845	845	845	845	960	1120	1120	1120
		D mm	203	203	203	203	230	230	230	230
	Packaging Dimension	H mm	375	375	375	375	430	430	430	430
		W mm	943	943	943	943	1058	1223	1223	1223
		D mm	310	310	310	310	328	328	328	328

Notes:

1. The rated capacity is based on the following conditions:
Cooling conditions: indoor air inlet temperature: 27℃ DB, 19℃ WB, outdoor air inlet temperature: 35℃ DB, pipe length: 7.5m, pipe height difference: 0m.
Heating conditions: indoor air inlet temperature: 20℃ DB, outdoor air inlet temperature: 7℃ DB, 6℃ WB, pipe length: 7.5m, pipe height difference: 0m.

2. The above noise values are measured in an anechoic chamber so that reflected sound should be taken into consideration during actual operation.
The above noise values are measured under the fan mode operation, and measured at a point 1m in front of the unit and 0.8m below the unit.

Floor Standing

3D Air Flow

The adjustable louvers allows for independent control, delivering 3D airflow both vertically and horizontally to reach every corner of the room.



22m Air Supply

Maximum 22m long-distance air supply can be achieved at high fan speed. You can choose from high, medium, low, or auto fan speed modes to cater to different needs.



Self-cleaning Function

Featured with self-cleaning technology, the evaporator can be self-cleaned automatically, preventing the dust and potentially harmful substances from accumulating on the surface of the heat exchanger. Thus the air blown from the air conditioner is clean and healthy.



Flexible Installation

Piping can be connected in three directions: left, right, and rear, offering flexible positioning and simple installation.



Floor Standing

Model			AVF-36H2FDA	AVF-48H2FDA	AVF-56H2FDA	AVF-96H2FDA
Power Supply			AC 1 Φ, 220V~240V/50Hz/60Hz			
Capacity	Cooling	kW	11.2	14.0	16.0	28.0
		Btu/h	38,000	48,000	54,500	95,500
	Heating	kW	12.5	16.0	18.0	31.0
		Btu/h	42,500	54,500	61,500	105,700
Power Input	Cooling	W	58	174	282	797
	Heating	W	58	174	282	797
Sound Pressure		dB(A)	41/39/37	51/47/43	56/54/51	62/60/57
Air Flow Rate		m³/min	26.7/25.3/22.2	40/35.7/31.3	45.8/42.5/40	83.2/70.7/61
Piping	Connection Type		Flare-nut Connection(with Flare Nuts)			Brazing
	Liquid	mm	Φ9.53	Φ9.53	Φ9.53	Φ9.53
		inch	3/8	3/8	3/8	3/8
	Gas	mm	Φ15.88	Φ15.88	Φ15.88	Φ22.2
		inch	5/8	5/8	5/8	7/8
	Condensate Drain	mm	VP16			RC1 (I.D. 25.4)
Weight	Net Weight	kg	59	59	59	136
	Gross Weight	kg	71	71	71	152
Dimensions	External	H mm	1928	1928	1928	1850
		W mm	665	665	665	1200
		D mm	415	415	415	425
	Packaging	H mm	2065	2065	2065	2010
		W mm	800	800	800	1260
		D mm	530	530	530	490

Notes:

1. The rated capacity is based on the following conditions:
Cooling conditions: indoor air inlet temperature: 27°C DB, 19°C WB, outdoor air inlet temperature: 35°C DB, pipe length: 7.5m, pipe height difference: 0m.
Heating conditions: indoor air inlet temperature: 20°C DB, outdoor air inlet temperature: 7°C DB, 6°C WB, pipe length: 7.5m, pipe height difference: 0m.

2. The above noise values are measured in an anechoic chamber so that reflected sound should be taken into consideration during actual operation.

Ceiling & Floor


Sleek Design

The glossy white cover panel features a smooth and elegant design. The bolts and nuts used for mounting the unit on the wall or ceiling are concealed, ensuring seamless integration into the room's interior.



Wide Air Supply

Louvers are consist of horizontal and vertical slats to cover larger coverage area to every corner. Wider opening angle from up to 120 ° for vertical louvers and up to 71 ° for horizontal louvers supplies air further and lower down to floor.

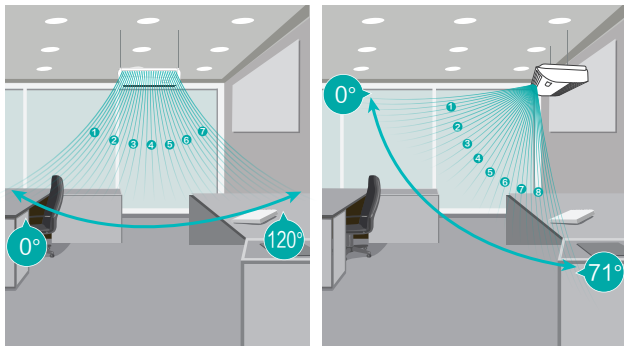

Flexible Installation

The unit can be installed either on the floor or mounted on the ceiling.



Convenient Installation and Maintenance

You can effortlessly adjust the installation height by opening the side panel. With duct connections and the electrical box located behind the return air panel, maintenance is also easier.



Ceiling & Floor



Model			AVV-17URSCA	AVV-18URSCA	AVV-22URSCA	AVV-24URSCA	AVV-27URSCB	AVV-30URSCB	AVV-38URSCB	AVV-48URSCC
Power Supply			AC 1 ϕ , 220V~240V/50Hz/60Hz							
Capacity	Cooling	kW	5.0	5.6	6.3	7.1	8.4	9.0	11.2	14.2
		Btu/h	17,100	19,100	21,500	24,200	28,700	30,700	38,200	48,500
	Heating	kW	5.6	6.5	7.5	8.5	9.6	10.0	13.0	16.3
		Btu/h	19,100	22,200	25,600	29,000	32,800	34,100	44,400	55,600
Power Input	Cooling	W	40	40	70	70	70	80	130	160
	Heating	W	40	40	70	70	70	80	130	160
Sound Pressure	Ceiling	dB(A)	39/35/30	39/35/30	45/41/37	45/41/37	43/39/34	45/40/36	51/46/40	50/46/42
	Floor	dB(A)	43/38/35	43/38/35	48/44/40	48/44/40	46/41/37	48/43/39	54/49/43	55/50/46
Airflow Rate		m³/min	13.0/11.0/9.0	13.0/11.0/9.0	16.1/14.0/11.3	16.1/14.0/11.3	18.2/15.2/12.2	19.4/16.3/13.3	24.8/20.5/16.3	33.0/28.0/23.0
Speed-up Setting HH1		m³/min	14.2	14.2	17.8	17.8	19.8	21.2	27.0	36.0
Speed-up Setting HH2		m³/min	16.0	16.0	20.0	20.0	22.3	23.5	29.2	37.4
Panel Colour		–	Neture White							
Piping	Connection Type	–	Flare-nut Connection (with Flare Nuts)							
	Liquid	mm	ϕ 6.35	ϕ 6.35	ϕ 9.53	ϕ 9.53	ϕ 9.53	ϕ 9.53	ϕ 9.53	ϕ 9.53
		inch	1/4	1/4	3/8	3/8	3/8	3/8	3/8	3/8
	Gas	mm	ϕ 15.88	ϕ 15.88	ϕ 15.88	ϕ 15.88	ϕ 15.88	ϕ 15.88	ϕ 15.88	ϕ 15.88
		inch	5/8	5/8	5/8	5/8	5/8	5/8	5/8	5/8
	Condensate Drain	mm	I.D.32							
Weight	Net Weight	kg	33	33	34	34	41	41	41	49
	Gross Weight	kg	38	38	39	39	46	47	48	56
Dimensions	External	H mm	230	230	230	230	230	230	230	230
		W mm	990	990	990	990	1285	1285	1285	1580
		D mm	680	680	680	680	680	680	680	680
	Packaging	H mm	340	340	340	340	340	340	340	340
		W mm	1110	1110	1110	1110	1400	1400	1400	1690
		D mm	830	830	830	830	830	830	830	830

Notes:

1. The nominal cooling capacity and heating capacity are based on the following conditions:
Cooling Operation Conditions
Indoor Air Inlet Temperature: 27°C DB (80°F DB), 19.0°C WB (66.2°F WB)
Outdoor Air Inlet Temperature: 35°C DB (95°F DB)
Piping Length: 7.5 Meters Piping Lift: 0 Meter
Heating Operation Conditions
Indoor Air Inlet Temperature: 20°C DB (68°F DB)
Outdoor Air Inlet Temperature: 7°C DB (45°F DB), 6°C WB (43°F WB)

2. The sound pressure level is based on the following condations:
1.0m beneath the unit, 1.0m from Discharge Grille.
The above data was measured in an anechoic chamber so that the reflected sound should be taken into consideration in the field. When bottom air inlet is adopted, sound pressure will increase according to factors such as installation mode and the room structure.

Floor Concealed


Space Saving

Floor concealed units are designed to be installed on floors completely concealed into the walls which designed to be slim and compact with only height of 620mm to be hidden under half-heighted windows.




Adjustable Static Pressure and Flexible Installation

With 2-level external static pressure adjustable, project design and installation are more flexible. Users can choose the air duct to increase the air supply distance in order to achieve the completely concealed installation.

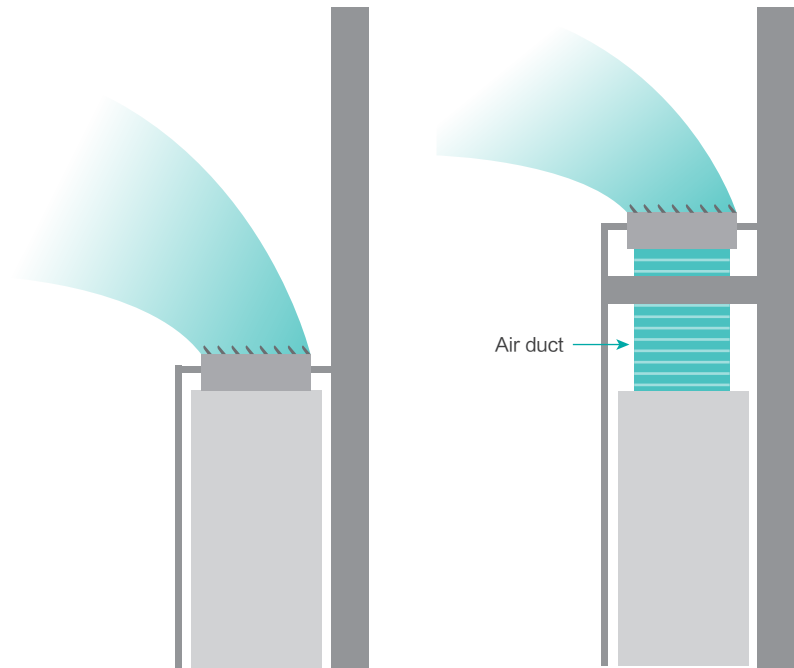

Floor Concealed

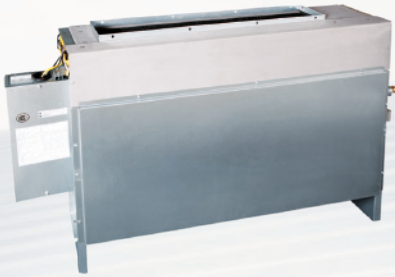

Model			AVH-09UXCSAA	AVH-14UXCSAA	AVH-18UXCSBA	AVH-24UXCSBA
Power Supply			AC 1 Φ , 220V~240V/50Hz			
Model			AVH-09UX2SAA	AVH-14UX2SAA	AVH-18UX2SBA	AVH-24UX2SBA
Power Supply			AC 1 Φ , 220V/60Hz			
Capacity	Cooling	kW	2.8	4.3	5.6	7.1
		Btu/h	9,600	14,700	19,100	24,200
	Heating	kW	3.3	4.9	6.5	8.5
		Btu/h	11,300	16,700	22,200	29,000
Power Input	Cooling	W	50	80	90	120
	Heating	W	50	80	90	120
Sound Pressure		dB(A)	34/31/27	40/36/34	41/36/32	44/40/36
Airflow Rate		m³/min	8.5/7.5/6.3	10.3/9.0/8.0	14.8/12.3/10.5	16.3/13.8/11.8
Piping	Connection Type	—	Flare-nut Connection (with Flare Nuts)			
	Liquid	mm	Φ 6.35	Φ 6.35	Φ 6.35	Φ 9.53
		inch	1/4	1/4	1/4	3/8
	Gas	mm	Φ 12.70	Φ 12.70	Φ 15.88	Φ 15.88
		inch	1/2	1/2	5/8	5/8
	Condensate Drain	mm	I.D.32			
Weight	Net Weight	kg	18	22	26	27
	Gross Weight	kg	30	31	37	37
Dimensions	External	H mm	620	620	620	620
		W mm	948+139	948+139	1218+139	1218+139
		D mm	202	202	202	202
	Packaging	H mm	675	675	675	675
		W mm	1160	1160	1430	1430
		D mm	240	240	240	240

Notes:




1. The nominal cooling capacity and heating capacity are based on the following conditions:
Cooling Operation Conditions
Indoor Air Inlet Temperature: 27°C DB (80°F DB), 19.0°C WB (66.2°F WB)
Outdoor Air Inlet Temperature: 35°C DB (95°F DB)
Piping Length: 7.5 Meters Piping Lift: 0 Meter
Heating Operation Conditions
Indoor Air Inlet Temperature: 20°C DB (68°F DB)
Outdoor Air Inlet Temperature: 7°C DB (45°F DB), 6°C WB (43°F WB)

2. The sound pressure level is based on the following conditions:
1.5m meters from the unit and 1.5m meters from floor level.
The above data was measured in an anechoic chamber so that reflected sound should be taken into consideration in the field.

All Fresh Air


Multiple Fan Speeds

Equipped with a DC motor, our system offers three-level fan speeds that can be flexibly adjusted to suit different indoor conditions.



Adjustable Static Pressure

Three static pressure modes can be adjusted to meet the needs of different air supply distance, making installation more flexible and effectively sends conditioned air to every corner of the room.

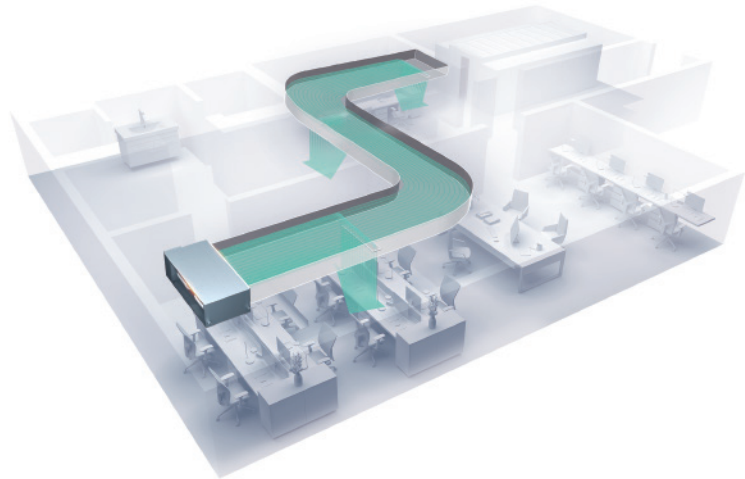


Self-cleaning Function

Featured with self-cleaning technology, the evaporator can be self-cleaned automatically, preventing the dust and potentially harmful substances from accumulating on the surface of the heat exchanger. It ensures that the air blown from the air conditioner is clean and healthy.




PM2.5 Filter Box

Equipped with a high-performance filter box, our air conditioning system removes impurities from outdoor air, ensuring the air you breathe is cleaner and healthier. Besides, the filter box is designed for easy maintenance and replacement, allowing for seamless system operation.

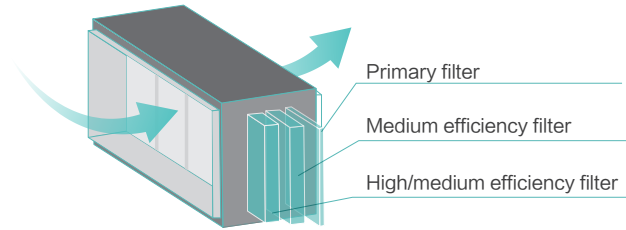

All Fresh Air

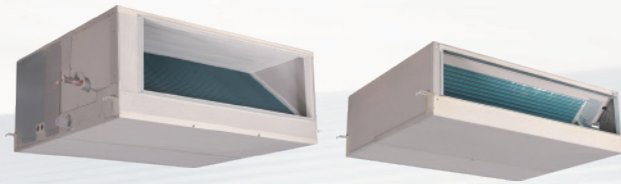


Model			AVA-48HJFDL-108	AVA-76HJFDL-168	AVA-96HJFDL-210	AVA-114HJFDL-300
Power Supply			AC 1Φ,220V~240V/50Hz/60Hz			
Capacity	Cooling	kW	14.0	22.4	28.0	33.5
		Btu/h	47,800	76,500	95,600	114,400
	Heating	kW	13.7	21.9	24.5	26.4
		Btu/h	46,800	74,800	83,600	90,100
Power Input	Cooling	W	190	311	421	721
	Heating	W	190	311	421	721
Sound Pressure		dB(A)	42	46	48	49
Airflow Rate		m³/min	18.0/15.6/13.3	28.0/23.2/18.3	35.0/31.7/26.7	50.0/41.7/33.3
External Static Pressure		Pa	150(150~200~250)	150(150~200~250)	150(150~200~250)	150(150~220~300)
Piping	Connection Type		Flare-Nut Connection (with Flare Nuts)		Brazing	
	Liquid	mm	Φ9.53	Φ9.53	Φ9.53	Φ12.70
		inch	3/8	3/8	3/8	1/2
	Gas	mm	Φ15.88	Φ19.05	Φ22.20	Φ25.40
		inch	5/8	3/4	7/8	1
	Condensate Drain		VP25			
Weight	Net Weight	kg	56	107	108	108
	Gross Weight	kg	62	124	125	125
Dimensions	External	H mm	320	484	484	484
		W mm	790	1072	1072	1072
		D mm	1420	1269	1269	1269
	Packaging	H mm	420	1213	1213	1213
		W mm	1650	1450	1450	1450
		D mm	955	530	530	530

- Notes:
- The nominal cooling capacity and heating capacity are based on following conditions:
Cooling operation conditions: 35℃ DB, 28℃ WB, piping length: 7.5m, piping lift: 0m.
Heating operation conditions: 0℃ DB, -3℃ WB, piping length: 7.5m, piping lift: 0m.
(Heating capacity is tested when defrosting is not available.)
 - The sound pressure level is based on following conditions: 1.4m beneath the unit.
The above data was measured in an anechoic chamber so that reflected sound should be taken into consideration in the field.
 - In case of connecting the all fresh air indoor unit with other indoor units in the same refrigerant cycle, the total capacity of all fresh air indoor unit shall not exceed 30% of the rated capacity of VRF outdoor unit.
 - When the outdoor unit is connected only with all fresh air indoor unit, the combination ratio is 80 ~ 100%.


Heat Recovery Ventilator

Compact Body, Convenient Installation

Its compact design facilitates easy installation in narrow ceilings. With a width of only 735mm, the unit (HKF/50C1EC) is perfect for the tight ceiling spaces.

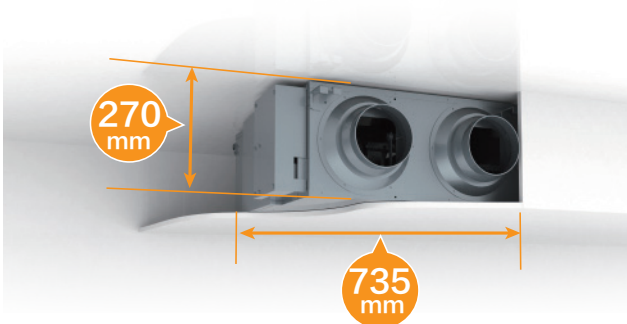


Airflow System

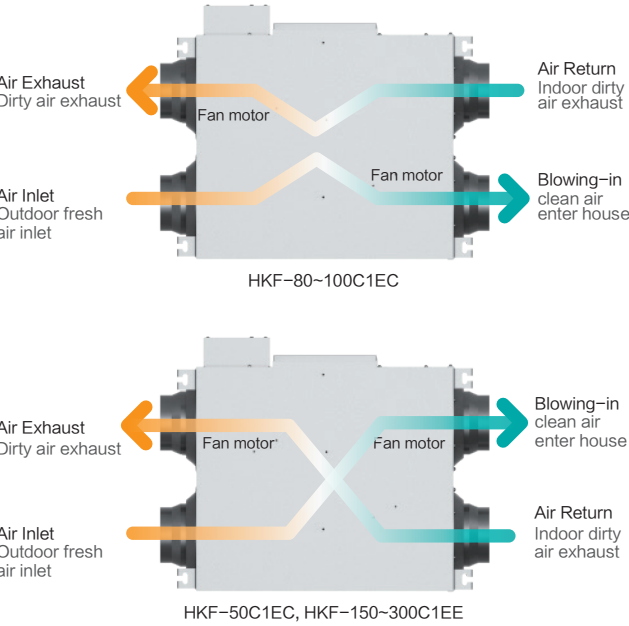

3-level Fan Speed for Your Choice

The three-level fan speed adjustment, offering high, medium, and low options, provides flexibility to cater to individual preferences in various environments.

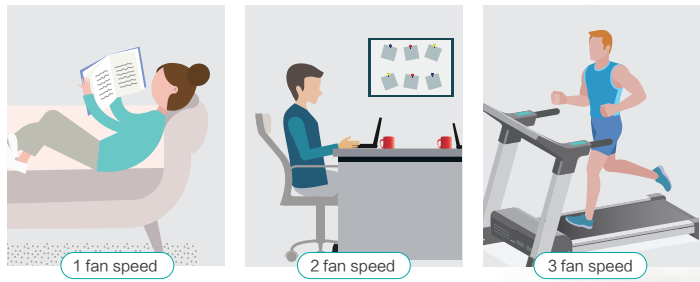

*This feature is available for the unit HKF/50C1EC, HKF/80C1EC, HKF/100C1EC.

Low Noise

The unit features a low-noise fan, optimal internal silencer, and air channels, significantly reducing operation noise to 26.5dB(A)*. Additionally, a static pressure adjustment plate on the exhaust side optimizes outdoor static pressure, further minimizing the noise.

* The noise level under the low airflow speed for the unit HKF/50C1EC can achieve 26.5dB(A).

Heat Recovery Ventilator

Intelligent Control

The unit can be easily connected to the central control system through the dedicated converter*, enabling centralized control alongside the air-conditioning system.

* For central control requirements, please contact our technical engineers regarding the converter.


Features

- Large LED screen display
- Fan speed setting
- Temp. and fan speed display
- Timer

- Fan adjust
- Function
- ON/OFF
- Mode setting



Wired Controller HYPE-KC01

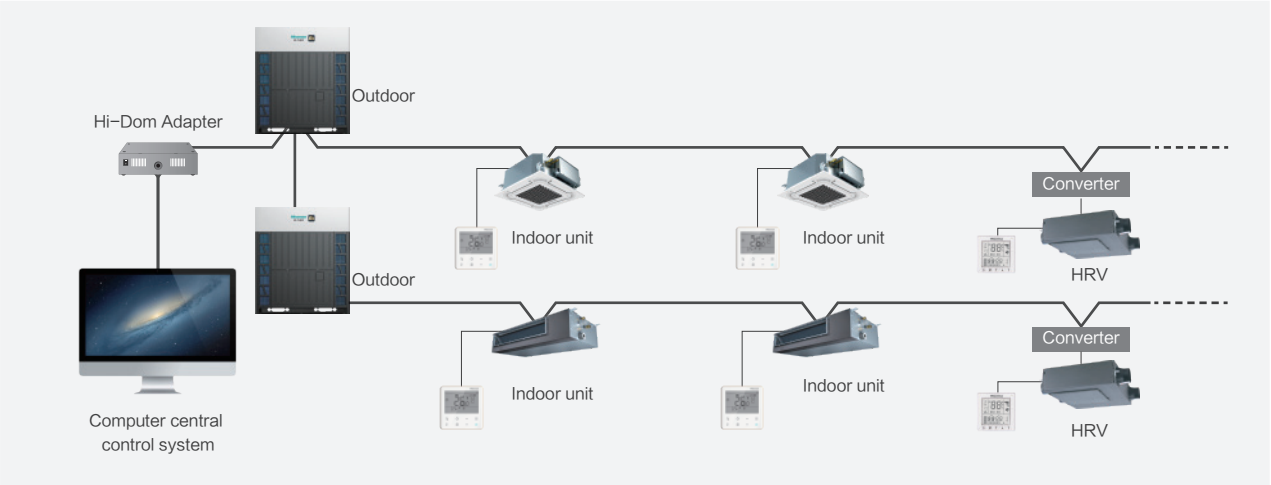

High-efficiency Heat-exchange Core

The hexagonal high-efficiency counterflow heat exchanger core adopts ultra-thin high-performance heat transfer membrane and an integrated optimized flow channel, which extends the time of the heat exchange, thereby improving the heat exchange efficiency. It effectively processes the temperature and humidity of the outdoor fresh air to a level close to the indoor air condition, thereby reducing air conditioning energy consumption.



Note: The unit HKF/50C1EC is equipped with a hexagonal heat exchanger.

AHU Connection KIT

The Hisense AHU-kit integrates external heat exchangers of Air-handling units (AHU) into a Hisense VRF system to provide more flexible air conditioning solutions.

Main Function

- ON/OFF Control


● Temperature Setting

● Capacity Demand

● Operation Mode
- Communication wire

Sensor signal

Refrigerant pipe

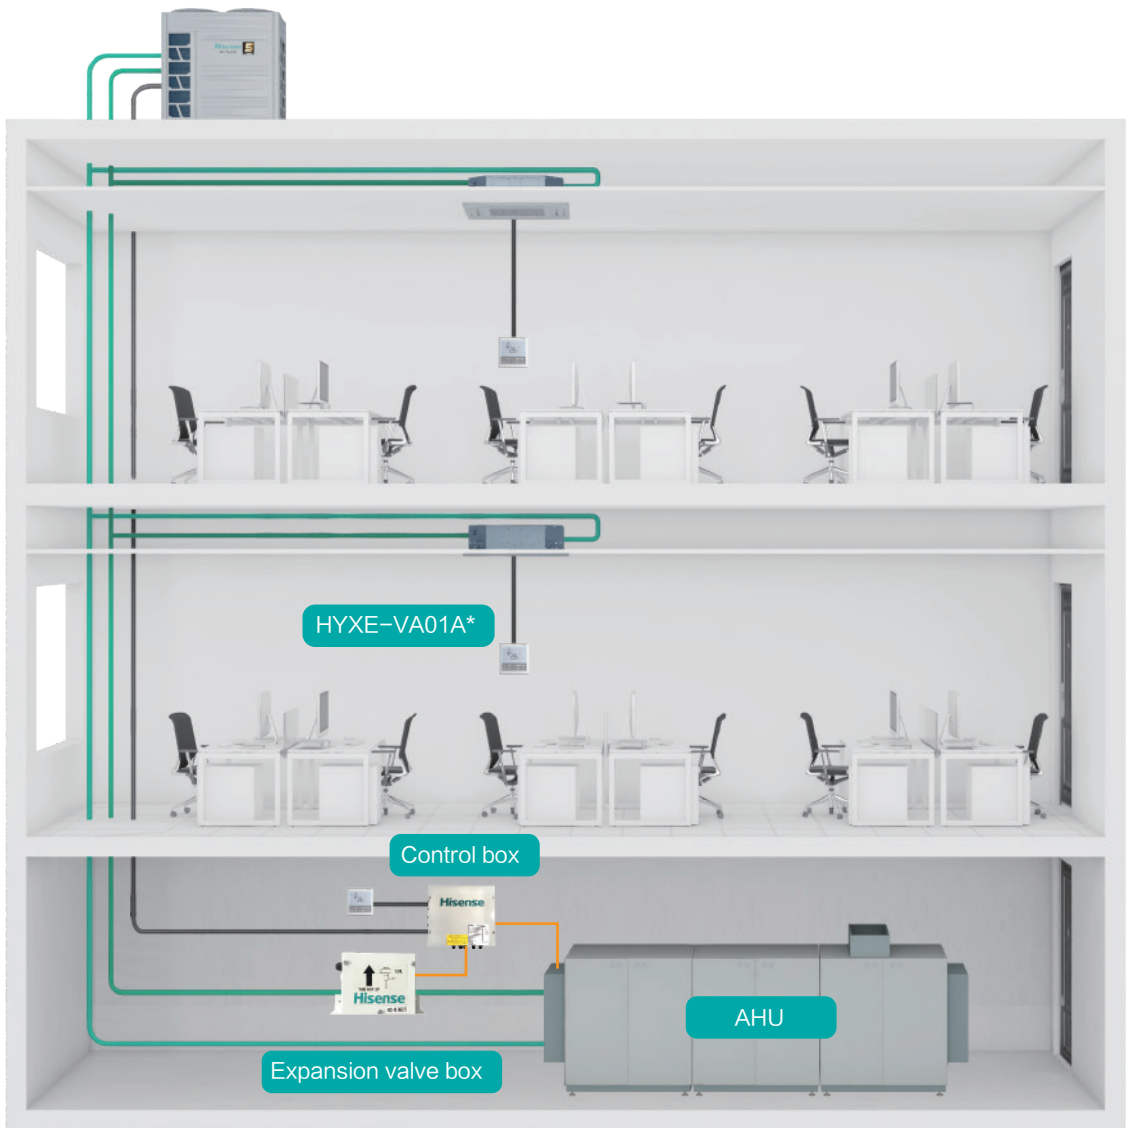

*The wired controller HYPE-VA01A is standard.

AHU Connection KIT

AHU kit can provide 3 kinds of control type for AHU application: Inlet air temperature control, outlet air temperature control and duty signal control.

Capacity Control Mode	Set Temperature by Remote Controller	Set ODU Capacity Range
Inlet Air (room air) Temperature Control	Cooling: 16~32 ℃ Heating: 16~32 ℃	—
Outlet Air Temperature Control		
Duty Signal Control (0~10V or 0~5V or 4~20mA)	—	15%~100%

AHU Connection KIT		R410A	HZX-2 BEJ	HZX-4 BEJ	HZX-6 BEJ	HZX-10BEJ		HZX-20BEJ					HZX-30BEJ				
		R32	HZX-2 BEJD	HZX-4 BEJD	HZX-6 BEJD	HZX-10BEJD		HZX-20BEJD					HZX-30BEJD				
Model Power Supply			AC 1Φ,220~240V/50Hz/60Hz														
Nominal Capacity of AHU		HP	2	4	6	8	10	12	14	16	18	20	22	24	26	28	30
Allowed Heat Exchanger Capacity (H/M/L)	Cooling	kW	4.0	7.1	11.2	16.0	20.0	28.0	33.5	40.0	45.0	50.0	56.0	61.5	69.0	73.0	80.0
		kW	5.0	9.0	14.0	20.0	25.0	30.0	35.0	43.0	48.0	52.0	58.0	65.0	71.0	76.0	82.0
		kW	5.6	11.2	16.0	22.4	28.0	33.5	40.0	45.0	50.0	56.0	61.5	69.0	73.0	80.0	85.0
	Heating	kW	4.5	8.0	12.5	17.9	22.4	31.5	37.5	45.0	50.0	56.0	63.0	69.0	77.5	82.5	90.0
		kW	5.6	10.0	16.0	22.4	28.0	33.5	40.0	47.5	53.0	60.0	66.0	75.0	79.0	86.0	92.0
		kW	7.1	12.5	18.0	25.0	31.5	37.5	45.0	50.0	56.0	63.0	69.0	77.5	82.5	90.0	95.0
Heat Exchanger Volume	Min	dm³	0.57	1.03	1.92	2.92	3.89	4.76	5.85	6.79	7.57	8.47	9.04	9.50	10.39	11.39	12.36
	Max	dm³	1.16	2.37	2.92	3.89	4.76	5.91	6.89	8	8.92	9.97	11.13	12.34	12.89	13.86	14.73
Equivalent Indoor Unit Capacity		HP	2	4	6	8	10	12	14	16	18	20	22	24	26	28	30
Control Box Model		R410A	HZX-BEJ/1														
		R32	HZX-BEJD/1														
Expansion Valve Box Model		R410A	HZX-2 BEJ/2	HZX-4 BEJ/2	HZX-6 BEJ/2	HZX-10BEJ/2		HZX-20BEJ/2					HZX-20BEJ/2 2set				
		R32	HZX-2 BEJD/2	HZX-4 BEJD/2	HZX-6 BEJD/2	HZX-10BEJD/2		HZX-20BEJD/2					HZX-20BEJD/2 2set				

Operation conditions		Cooling		Heating	
Indoor air inlet temperature	DB	27.0℃		20.0℃	
	WB	19.0℃		-	
Outdoor air inlet temperature	DB	35.0℃		7.0℃	
	WB	-		6.0℃	

DB: dry bulb; WB: wet bulb
Pipe Length: 7.5m; pipe height: 0m

CONTROL SYSTEMS



Individual Control

Centralized Control

Intelligent Control

AIR
CONDITIONING
SOLUTION

Overview

Model	Wired Controller HYXE-VC01	Wired Controller HYXM-VG01	Wired Controller HYXE-VA01A	Wired Controller HYXE-S01H	Wireless Controller HYE-VD01
Picture					
Max. connectable indoor units	6	16	16	16	—
Power supply	15V	15V	15V	15V	3V
Dimension(mm)	86*86	120*120	120*120	120*70	178.6*47.8
Cool/Heat/Fan/Auto/Dry	●	●	●	●	●
Auto dehumidification(humidity sensor)	●	●	●	●	×
Fan speed	●	●	●	●	●
Louver setting	●	●	●	●	●
Temperature setting	●	●	●	●	●
Operation monitoring	●	●	●	●	×
Timer	●	●	●	●	●
7-day timer	×	●	×	×	×
Holiday setting	×	●	×	×	×
Main-sub connection	●	×	●	×	×
Main-sub control	×	●	×	×	×
Change indoor address	●	●	●	×	×
Check function	●	●	●	●	×
Option setting	●	●	●	●	×
Air filter cleaning reminding	●	●	●	●	×
Error code display	●	●	●	●	×
Auto test run	●	●	●	●	●
Indoor/outdoor PCB checking	●	●	●	●	×
Self diagnostic function	●	●	●	●	●
Back light	●	●	●	●	●
Built-in temperature sensor	●	●	●	×	●
Wireless control available	●	●	×	×	●
Individual louver control	●	●	●	×	●
Breeze mode	●	●	●	×	×
Motion sensor	×	●	●	×	×
Health(Airpure)	●	●	●	×	●
High-temp sterilization	×	●	×	×	×
Hi-Motion	×	●	×	×	×
ECO (energy saving)	●	●	●	×	●
Quiet (Indoor unit)	●	●	●	●	●
Sleep(Indoor unit)	●	●	●	×	●
Window interlock	●	●	●	×	×
Key card	●	●	●	×	×
3D-air flow	●	●	●	×	●
Child lock	●	●	×	×	×
Self cleaning	●	●	●	×	●
Auto changeover	×	●	×	×	×
Dynamic ESP	●	●	×	×	×
Outlet air temp limit	●	●	×	×	×

Remarks: Available: ● Unavailable: ×

Type	Wired Controller				Wireless Controller
Model	HYXE-VC01	HYXM-VG01	HYXE-VA01A	HYXE-S01H	HYE-VD01
Picture					
Indoor Unit	4-Way Cassette	○	○	○	○
	Mini 4-Way Cassette	○	○	○	○
	1-Way Cassette	○	○	○	×
	2-Way Cassette	○	○	○	×
	Ceiling Ducted (AC/DC)	○	○	○	○
	Ceiling Ducted (High/Low)	○	○	○	○
	Console	○	○	○	●
	Wall Mounted	○	○	○	●
	Floor Standing	○	○	○	●
	Ceiling & Floor	○	○	○	●
	Floor Concealed	○	○	○	×
	All Fresh Air	○	○	○	○
	Heat Recovery Ventilator	×	×	×	×
	AHU Kit	○	○	●	×

Type	Receiver Kit				Centralized Controller	ON/OFF
Model	HYRE-V02H	HYRE-Z01H	HYRE-T03H	HYRE-X01H	HYJM-RA10D	HYJ-J01H
Picture						
Indoor Unit	4-Way Cassette	×	×	○	×	×
	Mini 4-Way Cassette	×	○	×	×	○
	1-Way Cassette	×	×	×	○	○
	2-Way Cassette	○	×	×	×	○
	Ceiling Ducted (AC/DC)	○	×	×	×	○
	Ceiling Ducted (High/Low)	○	×	×	×	○
	Console	○	×	×	×	○
	Wall Mounted	○	×	×	×	○
	Floor Standing	×	×	×	×	×
	Ceiling & Floor	○	×	×	×	○
	Floor Concealed	○	×	×	×	○
	All Fresh Air	○	×	×	×	○
	Heat Recovery Ventilator	×	×	×	×	○

Remarks: Standard: ● Optional: ○ Incompatible: ×

Individual Control

Wired Controller

HYXE-VC01




Mode	Cool/Heat/Auto/Fan/Dry
Timer	24-hour timer
Maintenance	Error code/Parameter check/Auto test run/ Self diagnostic function/Indoor & Outdoor PCB checking/ Air filter cleaning reminding/IDU address setting
Louver	7 Louver setting/3D-air flow/Individual louver control
Special function	Health/ECO/Quiet/Sleep/Self-cleaning
Fan speed	6
Temperature setting	0.5℃ accuracy/Display the setting temp. or room temp.
Main-sub control	•
Wireless control available	•
Built-in temperature sensor	•

Features

- Size: 86mm × 86mm
- Max. connectable indoor units: 6
- LCD display with back light
- Touch button
- Flat back-cover for easy mounting

HYXM-VG01



Mode	Cool/Heat/Auto/Fan/Dry
Timer	24-hour/Weekly schedule/Holiday setting
Maintenance	Error code/Parameter check/Auto test run/ Indoor&Outdoor PCB checking/Self diagnostic function
Louver	Louver setting/Individual louver control/3D-air flow
Special function	Breeze mode/Motion sensor/Health/ Hi-Motion/ECO/Quiet/Sleep
Fan speed	6
Temperature setting	0.5℃
Main-sub control	•
Air filter cleaning reminding	•
Back light	•
Built-in temperature sensor	•
Built-in receiver kit	•

Features

- Size: 120mm × 120mm
- Max. connectable indoor units: 16
- Touch button
- Language:
Support 11 languages: English,
French, German, Italian, Spanish,
Dutch, Portuguese, Polish, Turkish,
Russian, Arabic
- Diverse Display Colors
- Brand-new Auto Changeover
- Refrigerant Leakage Alarm

HYXE-VA01A



Features

Mode	Cool/Heat/Auto/Fan/Dry
Timer	72-hour
Maintenance	Error code/Parameter check/Auto test run/ Indoor&Outdoor PCB checking/Self diagnostic function
Louver	Louver setting/Individual louver control/3D-air flow
Special function	Breeze mode/Motion sensor/Health/ECO/Quiet/ Sleep/Self-cleaning
Fan speed	6
Temperature setting	0.5°C
Main-sub control	•
Air filter cleaning reminding	•
Back light	•
Built-in temperature sensor	•

- Size: 120mm × 120mm
- Max. connectable indoor units: 16
- LCD display
- Touch button

Wireless Controller

HYE-VD01



Features

Mode	Cool/Heat/Auto/Fan/Dry
Timer	24-hour timer
Maintenance	Auto test run/Self diagnostic function/ Identification of adjacent receiver
Louver	Louver setting/3D-air flow*/Individual louver control
Special function	Health/ECO/Quiet/Sleep/Self-cleaning
Fan speed	6
Temperature setting	1°C accuracy/Display the setting temp. or room temp.
Built-in temperature sensor	•

- Size: 178.6mm × 47.8mm
- LCD display with back light

* When used to control 3D air-flow Panels, an additional receiver kit of wireless control will be necessary.

HYXE-S01H




Features

Mode	Cool/Heat/Auto/Fan/Dry/Quiet
Timer	24-hour
Maintenance	Error code/Parameter check/Auto test run/ Indoor&Outdoor PCB checking/Self diagnostic function
Louver	Louver setting
Fan speed	6
Temperature control	•
Air filter cleaning reminding	•


- Size: 120mm × 70mm
- Max. connectable indoor units: 16
- LCD display
- Touch button

Receiver Kit for Wireless Control-Optional


HYRE-X01H

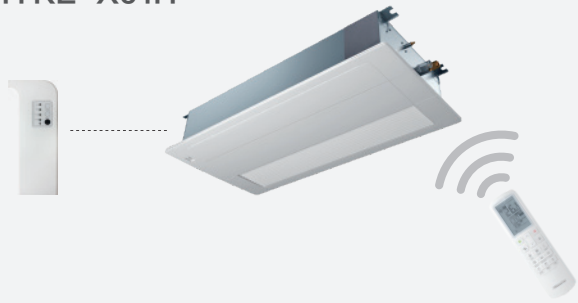

HYRE-V02H

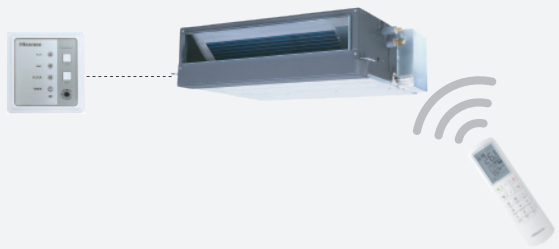

HYRE-Z01H

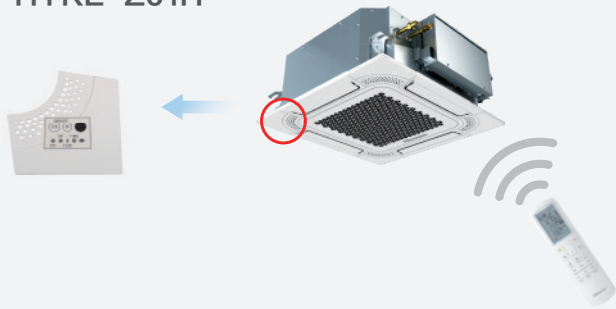

HYRE-T03H



Centralized Control

Smart Touch II
HYJM-RA10D




Cool/Heat/Auto/Fan/Dry
Remote control with web access
Support rotation operation setting
Weekly/Holiday timer
Error reminder email
External input/Output function
ECO/Health/Self-cleaning/Quiet mode setting of the outdoor unit
Support OTA update (remotely) and USB update (locally)

Features

- 10 inch colorful touch screen
- 1280 × 800 High Resolution
- Size: 170mm × 252mm × 37mm
- Connected quantity:
160 indoor units, 64 outdoor units
- 14 different languages:
English, French, Spanish, German, Italian, Dutch, Polish, Turkish, Russian, Arabic, Portuguese, Vietnamese, Thai, Chinese


Energy Management

Visualized energy management is available through the Smart Touch II, enabling quick access to electricity consumption data and analysis. Utilizing big data analytics.

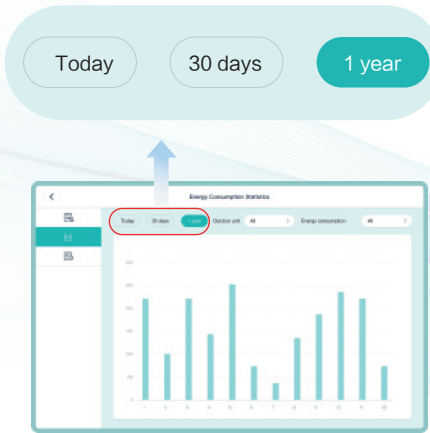


Access Remotely with Ease

Users have the flexibility to control the air-conditioning system using either the local Smart Touch II or remote web access.

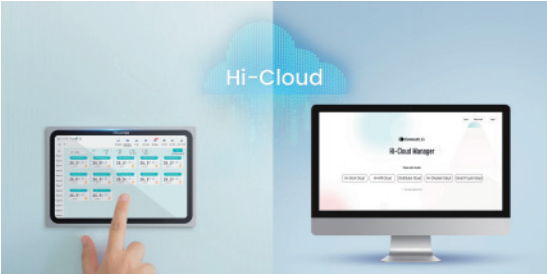


Free Connection

- Max. 4 Smart Touch controllers can be used in one system
- One controller can be connected to max. 160 IDUs, 64 ODU

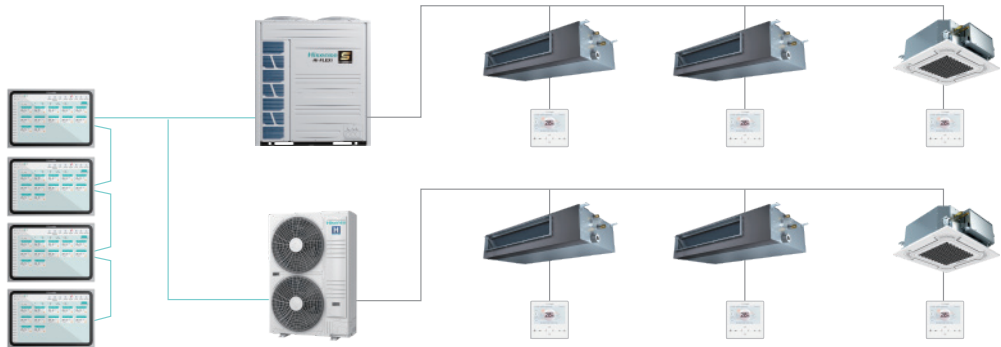

Future-proof

Ensure you stay up to date with both remote OTA updates and local USB updates.



Ideal for:

Offices, Schools, Factories, Hospitals, Hotels, Restaurants



ON/OFF Controller
HYJ-J01H



Group control (ON/OFF)
Indoor unit power OFF reminder
Indoor units Auto log in
Error reminder

Features

- Size: 120mm × 120mm
- Max. connectable indoor units: 128
- Max.connectable indoor unit groups: 16
- Touch button

Hi-Cloud Manager

Hisense Intelligent Control Solution



Intelligent Control

What is Hi-Cloud Manager?

Hi-Cloud Manager is the unified access management of Hisense HVAC intelligent control. Users can log in the control web at anytime and anywhere. Five "Clouds" are embed in the web interface including Hi-Mit Cloud, Smart Touch Cloud, Hi-Dom Cloud, Hi-Checker Cloud, and Distributor Cloud (specially for distrubutors).

Features:


- Centralized remote control
- Overview of key data
- Operation statistics
- Global project map
- Project management
- Regional plane navigation
- Schedule management
- Energy conservation management
- Alarm and message management

URL <https://hicloudmanager.hijuconn.com>

It's recommended to use the Chrome browser.

Users-friendly

- **End user**
Create a customized and smart experience.
- **Distributor**
Upgrade service capabilities for the projects under control.
- **Service engineer**
Ensure efficient service to improve customers' satification.

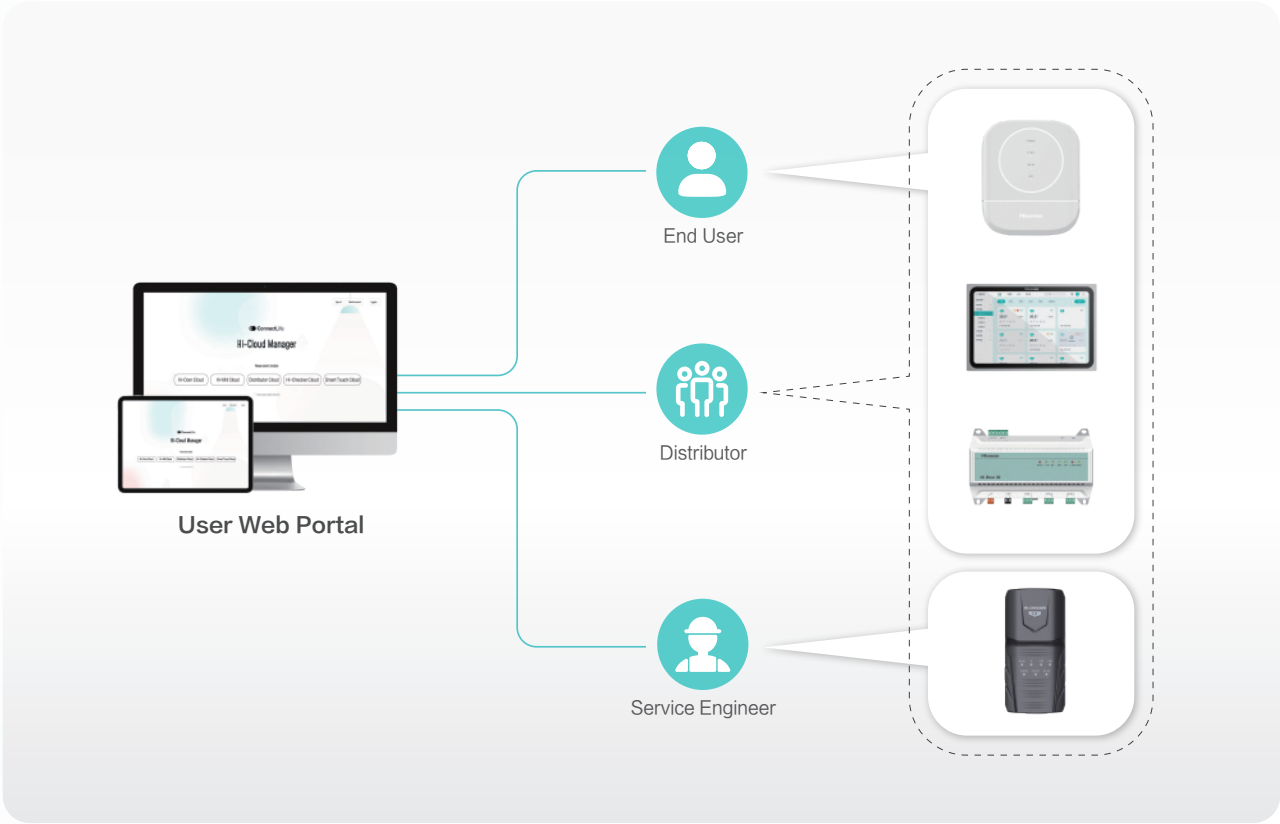



Anytime and anywhere, control is in your hands

One-Click Remote Control

With our Hi-mit App, control your home on-the-go. Turn on the AC during your commute, enjoying the fresh breeze the moment you step into your house. Experience the future of convenience, where your comfort is just a tap away.

Whole-house Voice Control

Hisense VRF sysetem can be connected with Google and Amazon speakers for effortless voice control in your house. Wake up your devices with a simple voice command, adjusting power on/off, setting modes, temperatures, and fan speeds without lifting a finger, freeing you to enjoy a truly hands-free smart living experience.





Brand-new Adapter and App

- Stylish appearance and compact body
- Compatible with VRF, hydro box and heat recovery ventilator
- Supporting OTA update
- Simple and intuitive interfaces
- Voice control available



Available on the App Store

Download today Google Play




Convenient Control

- 12 languages available
- Energy management
- 2-level permission
- Online repair
- 7x24 schedule setting
- Customized scenes setting



Energy management interface

Customized mode interface

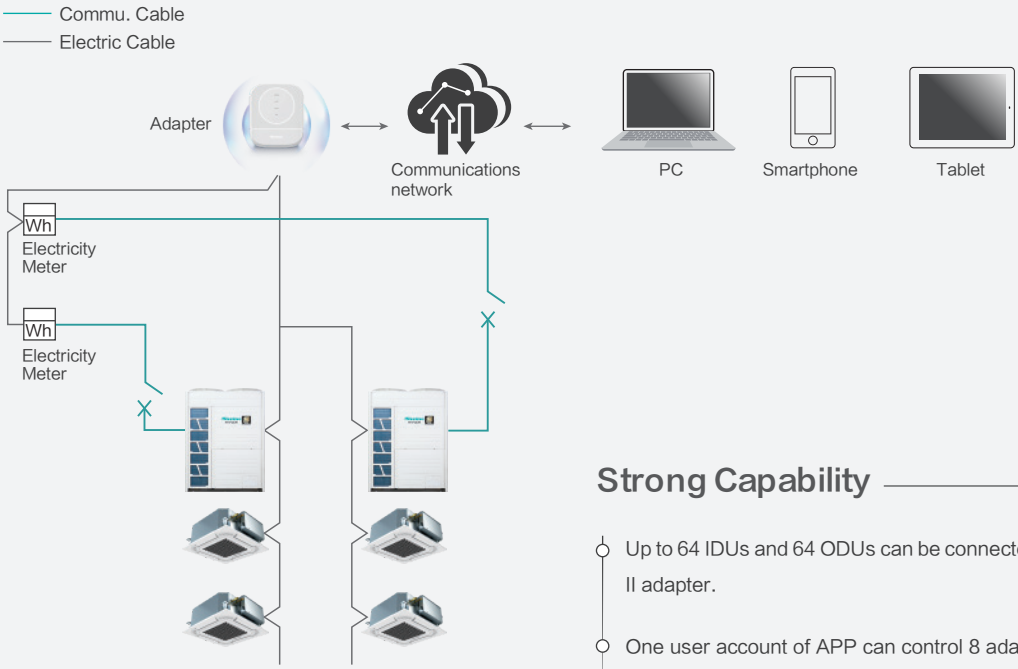

Commu. Cable

Electric Cable

Adapter

Communications network

PC

Smartphone

Tablet

Wh Electricity Meter

Wh Electricity Meter

Indoor Unit

Outdoor Unit

Strong Capability

- Up to 64 IDUs and 64 ODUs can be connected to one Hi-Mit II adapter.
- One user account of APP can control 8 adapters, up to 512 IDUs.

Specifications

Model	Power Supply	Max. Current	Power Input	Dimension	Net Weight
HCCS-H64H2C1M	DC 12V	1A	2.4W	91x117x31mm	0.14kg





Features

- Remote control available
- Multilevel user management
- AC control (on-off, mode, temp, air flow)
- AC locked control (running forbidden control, the max. and min. temp and cooling/heating locked)
- Running according to timer
- Malfunction history check
- Running record display
- Data synchronize
- Supporting for external I/O
- 2D navigation
- Electricity consumption allocation
- Multiple languages available
- Standard with Modbus RTU port

● Humanized interaction interface and comfortable user experience.



● The electricity consumption allocation makes it easy for users to allocate total electricity consumption among building occupants. Both segmented tariff and single tariff are available.

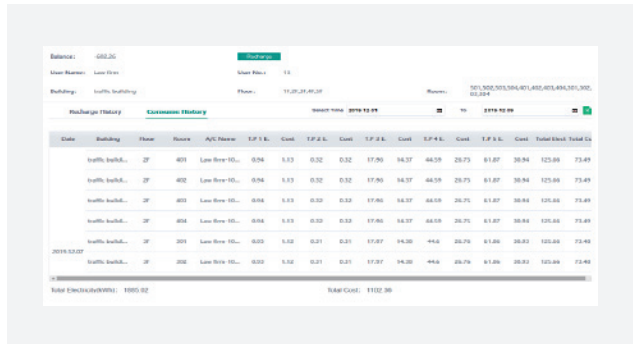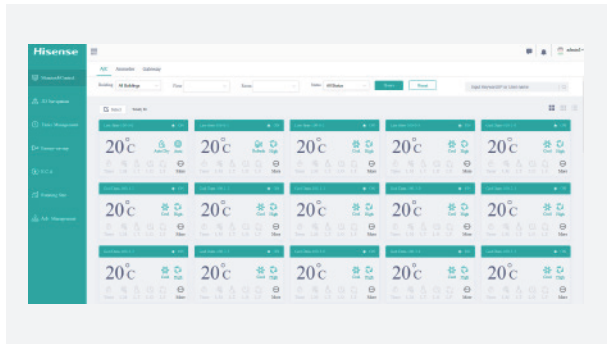

● Thanks to the 2D navigation, users can import floor plans and place indoor units in the corresponding rooms, creating a tailored system schematic. Thus all the indoor units can be monitored and controlled intuitively.



● Support operation history data record like the below picture. Also the operation data can be exported to excel format, convenient for customers to read.

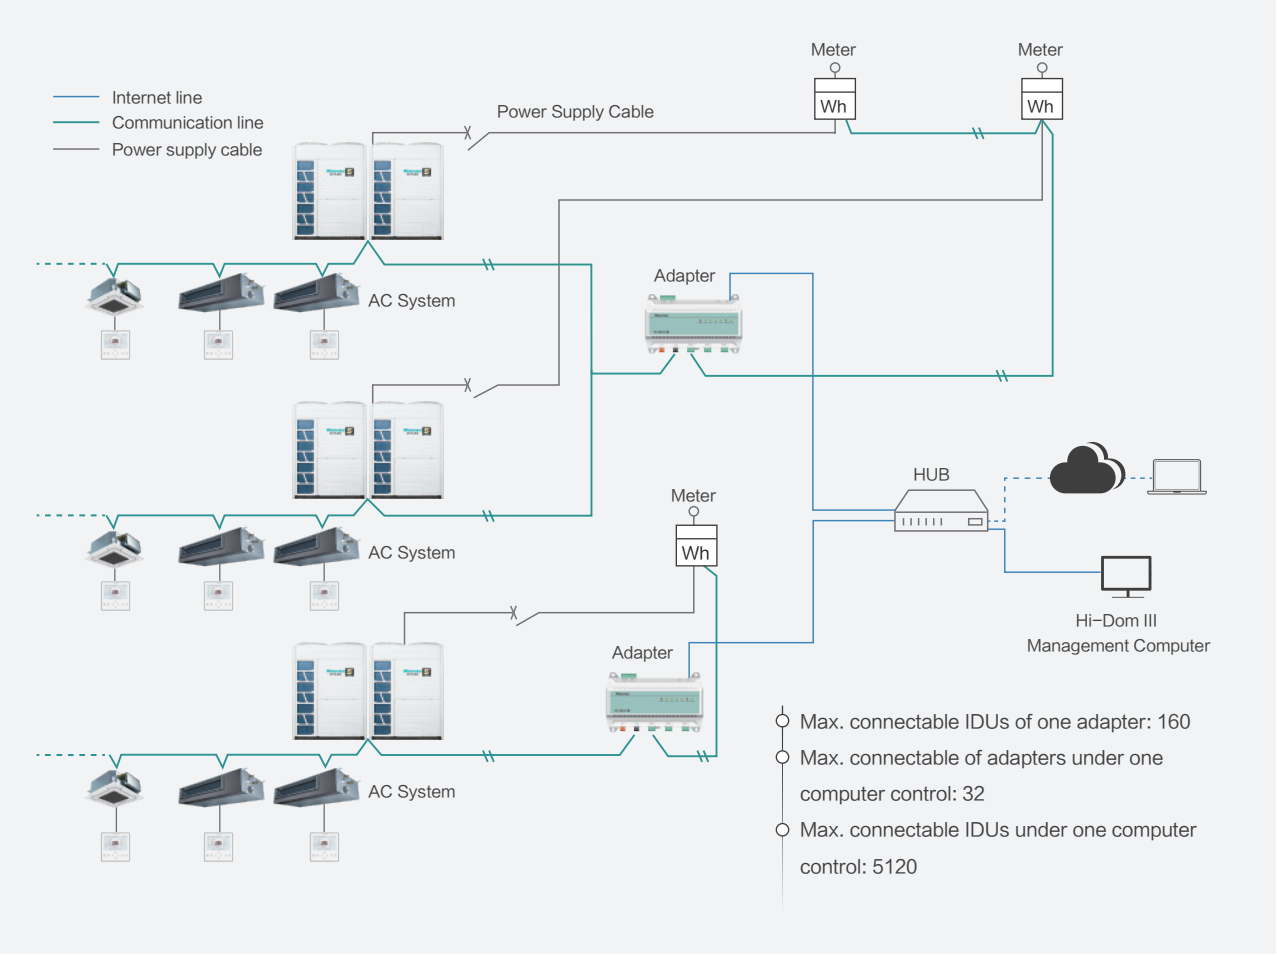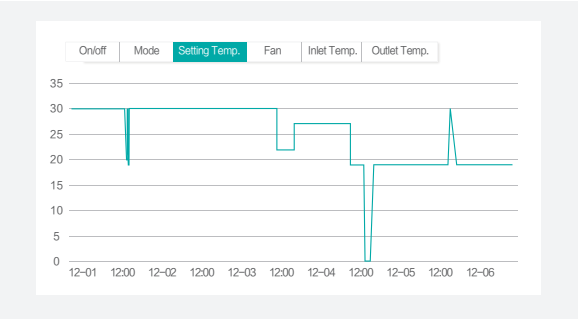

- Max. connectable IDUs of one adapter: 160
- Max. connectable of adapters under one computer control: 32
- Max. connectable IDUs under one computer control: 5120

Specifications

	Model	Power Supply	Dimension (LxWxD)	Note
Adapter	HCCS-H160H2C2YM	12V	180x115.4x64.5mm	With electric charging function
	HCCS-H160H2C2NM	12V	180x115.4x64.5mm	Without electric charging function



Intelligent service tool, improves your service

Hi-Checker is a plug and play service tool, with which service engineers can access the system and monitor operation status or data, very convenient for system communication and maintenance. Besides, it features cloud-based management, easy to access operation status remotely.



Small and Portable Body



Remote Access



Black Box Function



Powerful Charts



OTA Update

Easy to Use


- Compact size which allows high portability and space saving.
- Capable to slot in a 32G memory card for data collection and storage. Also the memory card and card reader are standard with Hi-Checker.
- Multiple choices of power supply types. It can be powered by the standard adapter (DC 5V), computer or power bank.
- Support OTA update, ensuring the software is always up to date.



Easy to Access


4 Ways to Access the Operation Data

- Conventional connection type. The simplest and reliable way by just connecting the Hi-Checker to your computer directly through USB.
- Internet connection type. Be connected to a stable Wi-Fi signal to achieve operation data and status monitoring anytime and anywhere.
- Hotspot connection type. Be connected to a temporary hotspot signal from the smartphone, allowing the Hi-Checker to remotely monitor the operation data when there is no stable Wi-Fi signal on site.
- SD card storage type. Hi-Checker equipped with SD card can be connected to the air conditioning system all the time, so that all the operation data can be stored in the card for later analysis.

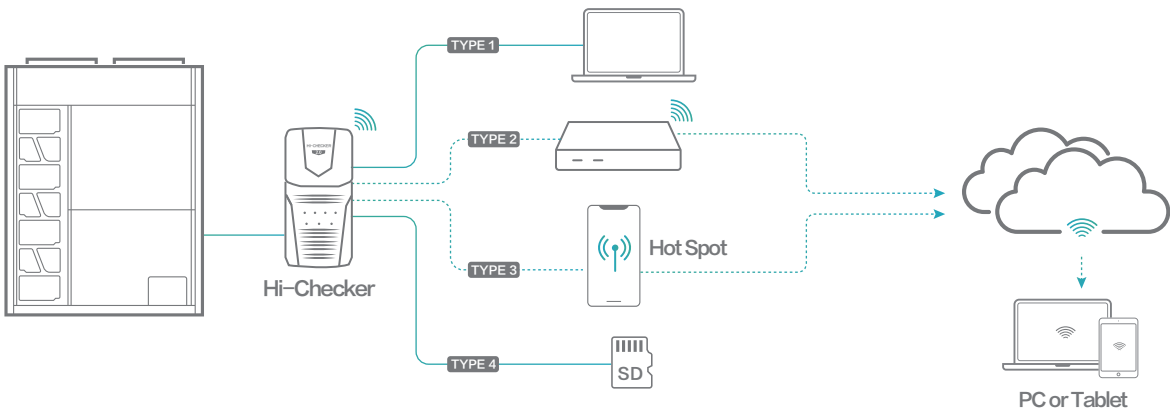


Easy to Understand

- Powerful and detailed chart analysis on the operation data, allowing users to determine the system condition easily. Together with the smart system diagram, it is interesting and easier for maintenance.
- Users can export the professional report either in .csv or .pdf format, very user-friendly.

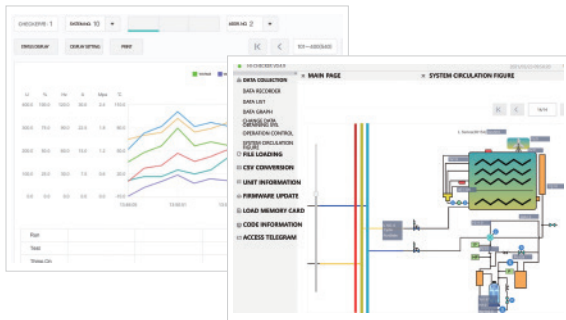

Specifications

Mode	Size (LxWxH)mm	Net Weight (g)	Power Supply	Connectable IDUs
HCCS-J64H2C3M	138x68x28	130	5V= 500mA	160

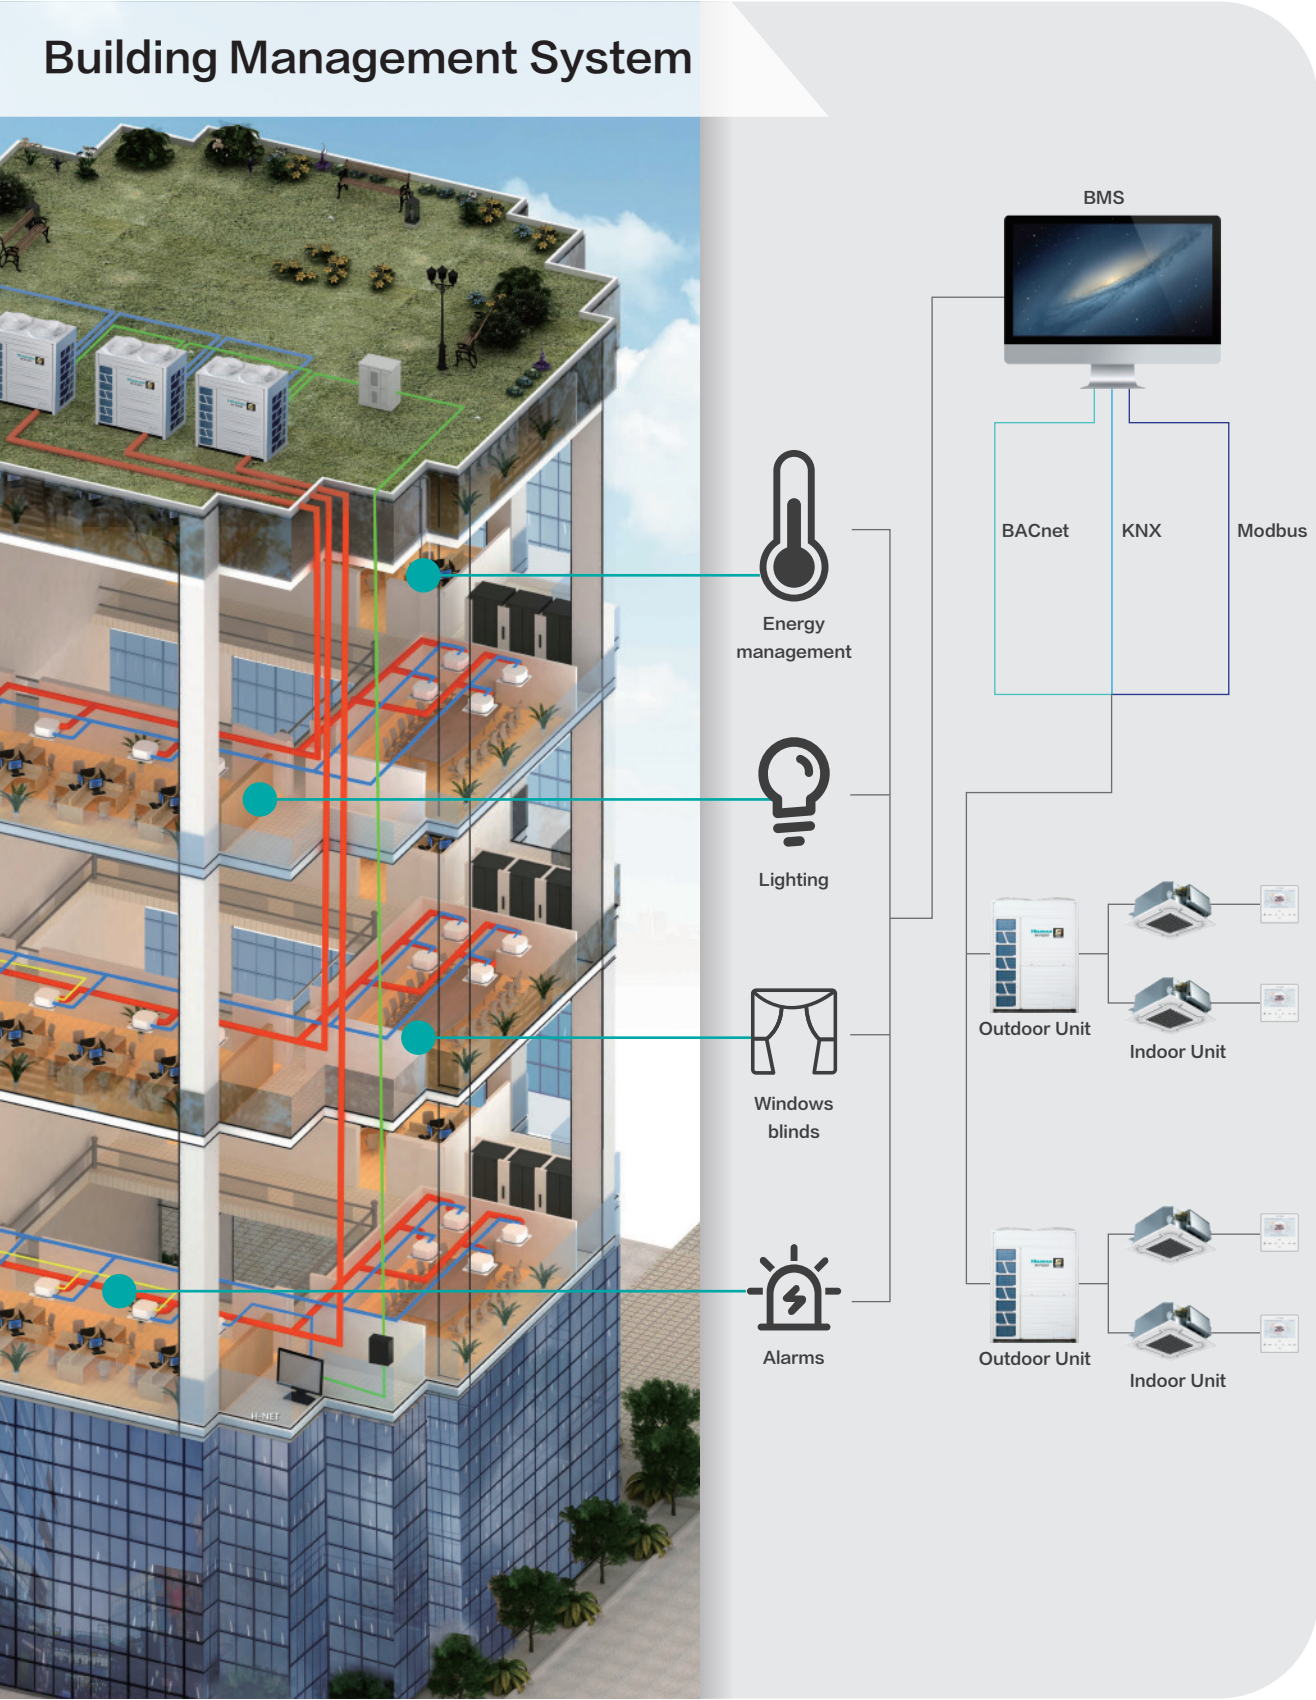

KNX®



KNX gateway	HS-RC-KNX-1i	
Power Supply	DC, 29V	
Max. Number of Connectable Indoor Units	1	
Dimension (H × W × D)	70 × 70 × 28mm	
Features	Standard data point types	Air filter reminder
	Error code	Running hours counter
	Directly control of all indoor units	

Modbus®



Modbus gateway		HCPC-H2M4C	
Power Supply		DC, 12V	
Max. Number of Connectable Indoor Units		160	
Dimension (H × W × D)		50 × 170 × 220mm	
Features	 On-Off setting	 Inlet air temperature monitoring	 Alarm monitoring and code display
	 Temperature setting	 Airflow setting and monitoring	 Humidity control
	 Operating mode setting	 All units On-Off control	

Mini Modbus®



MiniModbus gateway	HCPC-H2M5C		
Power Supply	DC, 12V		
Max. Number of Connectable Indoor Units	32		
Dimension (H × W × D)	27 × 75 × 100mm		
Features	☐ On-Off Setting	☐ Humidification control	☐ All Units On/Off Control
	☐ Temperature Setting (0.5℃ adjustment)	☐ Operating Mode Setting	☐ Alarm Monitoring and Code Display
	☐ Airflow Setting (Auto/3 or 6 fan speed)	☐ Inlet Air Temp. Monitoring	

BACnet® & KNX®



BACnet & KNX gateway	HCPC-H1KB16	HCPC-H1KB64
Power Supply	DC, 12~36V / 3W or AC, 24V/0.2A/50~60Hz or DC, 24V(Recommended)	
Max. Number of Connectable Indoor Units	16	64
Dimension (H × W × D)	100x115x100mm	100x115x100mm
Features	○ Central control of all indoor units	○ Heat/Dry/Fan/Cool/Auto mode
	○ Indoor unit data monitoring	○ Control-vane position swing control

Note: Bacnet® is a registered trademark of American Society of Heating, Refrigerating and Air-conditioning Engineers (ASHRAE).
Modbus® is a registered trademark of Schneider Electric.
KNX® is a registered trademark of Konnex.

ACCESSORIES

ACCESSORIES & ENGINEERING TOOLS

Accessories

Engineering Tools

Accessories

Refrigerant Sensor

Model	Applicable Models	Picture
HOPT-ERD02	R32 refrigerant systems	

Refrigerant Detector

Model	Applicable Models	Picture
HOPT-ERD01	R32 refrigerant systems	

Shut-off Box

Model	Applicable Models	Picture
HESE-2V15	R32 refrigerant systems	

Hi-Motion

Model	Applicable Models	Picture
HCM-S01E	All types of indoor units	

Motion Sensor

Model	Applicable Models	Picture
HPS-MACN	Mini 4-Way Cassette	
HCM-01E	4-Way Cassette	

Fresh Air Duct Adapter

Model	Applicable Models	Picture
HFL-56CSA	4-Way Cassette and Mini 4-Way Cassette	

Humidity Sensor

Model	Applicable Models	Picture
HCHR-S01E	4-Way Cassette, Mini 4-Way Cassette, Console, Ceiling Ducted, Floor Standing	

Filter


Filter model	Dimensions (LxWxD) mm	Applicable Models	Grade	Picture
HF-56MQE	343 × 343.5 × 15.0	Mini 4-Way Cassette	G4	
HF-160MQE	527 × 513.0 × 17.0	4-Way Cassette	G4	
HF-280L-FE	Filter: 1100x432.5x20 Frame: 1245x463	AVD-76/96HJDH AVA-48HJFDL-108/AVA-76HJFDL-168 AVA-96HJFDL-210/AVA-114HJFDL-300	G1	

Filter box model	Dimensions (L × W × H) mm	Applicable Models	Grade	Picture
HFB-96LFGDE	1339 × 384 × 462	AVD-76/96HJDH AVA-48HJFDL-108/AVA-76HJFDL-168 AVA-96HJFDL-210/AVA-114HJFDL-300	High-efficiency filter: HF-96HFGDE Coarse filter: HF-96LFGDE	
HFA-1080HP-XFE	1368 × 400 × 394	AVA-48HJFDL-108	G4+F7+F9	
HFA-3000HP-XFE	1236 × 400 × 502	AVA-76HJFDL-168/AVA-96HJFDL-210 AVA-114HJFDL-300	G4+F7+F9	

3D Air-flow Panel

Panel Model	Applicable Models	Dimensions (H × W × D) mm	Picture
HP-CB-NA	Ceiling ducted (AC/DC low-height) AVE-05/07/09/12*	180 × 740 × 70	
HP-DB-NA	Ceiling ducted (AC/DC low-height) AVE-15/17*	180 × 950 × 70	
HP-EB-NA	Ceiling ducted (AC/DC low-height) AVE-19/22/24*	180 × 1220 × 70	

AirPure Kit

Model	Power Supply	Applicable Models	Picture
HJK-ELZA	AC 1Φ, 220V~240V 50/60Hz	4-Way Cassette, Mini 4-Way Cassette	
HJK-ELZB	AC 1Φ, 220V~240V 50/60Hz	Ceiling Ducted, Console	

Drain Pump

Model	Applicable Models	Power Supply	Picture					
HPS-F133E	AVD-07-24HJDH / AVD-07-24HCFCH / AVD-07-24HCFCL	220-240V/50/60Hz						
HPS-F363E	AVD-24HJDH1 / AVD-30-54HJDH / AVD-27-54HCFCH / AVD-27-54HCFCL							
HPS-F134E	AVD-07-24H3FCH	208-230V/60Hz						
HPS-F364E	AVD-27-54H3FCH							
HPS-F8103E	AVD-76/96HJDH	220-240V/50/60Hz						
HPS-151#E	All types of indoor units except wall mounted.	220-240V/50/60Hz						

Wind-Snow Protector(For S5 Series)

Model	Power Supply	Outer Dimensions H × W × D(mm)	Picture
SH-TFF1X	AVWT-76~136HKF5	Upper: 951 × 803x828 Side: 1060 × 722 × 232 Rear: 951 × 697 × 828 Front: 1080 × 188 × 232	
SH-TFF2X	AVWT-154~190HKF5	Upper: 951 × 943 × 828 Side: 1060 × 722 × 232 Rear: 951 × 837 × 828 Front: 1080 × 328 × 232	
SH-TFF3X	AVWT-212~250HKF5	Upper: 951 × 1394 × 828 Side: 1060 × 722 × 232 Rear: 951 × 1286 × 828 Front: 1080 × 413 × 232	
SH-TFF4X	AVWT-272~290HKF5	Upper: 951 × 1603x828 Side: 1060 × 722 × 232 Rear: 951 × 1496 × 828 Front: 1080 × 188 × 232	
SH-TFF5X	AVWT-307~404HKF5	Upper: 951 × 1885 × 828 Side: 1060 × 722 × 232 Rear: 951 × 1776 × 828 Front: 1080 × 328 × 232	

NFC

Model	Applicable Models	Picture
HNFC-EA1	AVWT-76~1158HKF5 AVW-76~308HKDHE2	

Note: Suitable for S5 and H5 Series.

Air Outlet Guide


Model	Applicable Models	Dimensions (HxWxD) mm	Picture
SH-34CD	AVW-27~34HJFAE1	590x590x137	
SH-76CD	AVW-42~76HJFAE1	711x594x137	

Note: Suitable for Hi-Smart A Series.

Piping Connection Kit

There are two types of piping connection kit, non-insulation type and insulation type. The models below are the referenced models without suffix. Please contact with our engineer for detailed model information when ordering.

Manifold Pipe (For outdoor unit)
(Indoor Unit on Left Side)

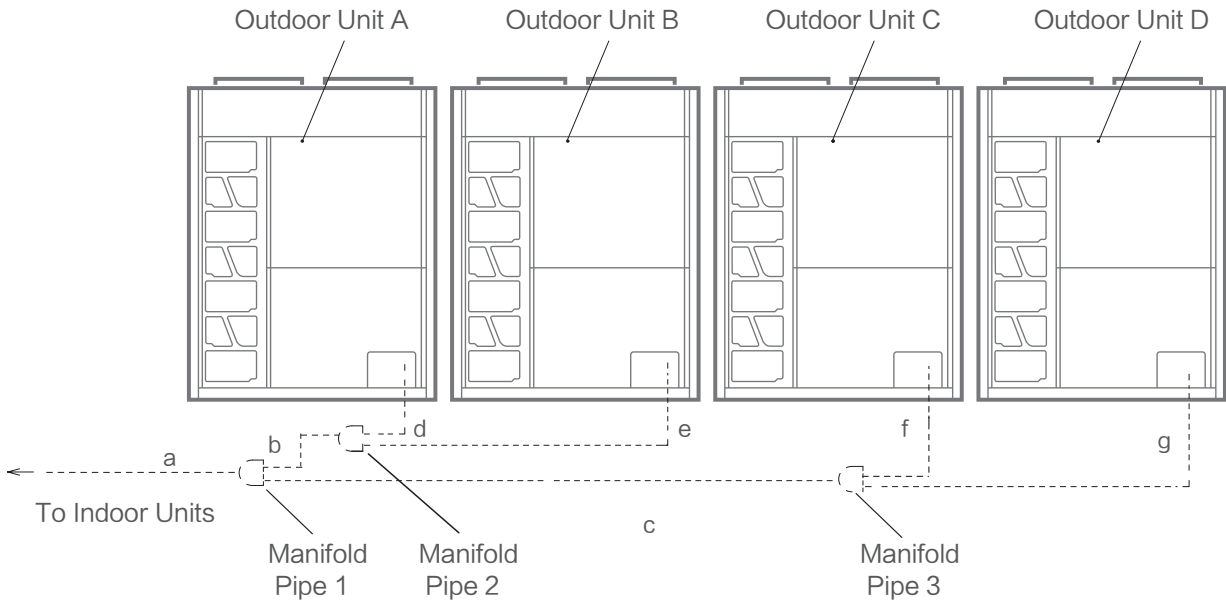

For S5 Series System

Outdoor Unit	AVWT-420~440HKF5	AVWT-462~772HKF5	AVWT-792HKF5	AVWT-812~830HKF5	AVWT-852~1158HKF5
Manifold Pipe1	HFQ-M32F	HFQ-M462F	HFQ-462F	HFQ-M682F	HFQ-682F
Manifold Pipe2	-	-	HFQ-M462F	HFQ-M462F	HFQ-M462F

For S Series Heat Recovery 2 Pipes System

Outdoor Unit	AVWT-290~522FKFSA	AVWT-544KFSA	AVWT-552~634KFSA	AVWT-654~794KFSA	AVWT-816KFSA	AVWT-824~968KFSA	AVWT-988~1066KFSA	AVWT-1088KFSA
Manifold Pipe1	HFQ-M32F	HFQ-M462F	HFQ-M462F	HFQ-M682F	HFQ-M682F	HFQ-M682F	HFQ-M682F	HFQ-M682F
Manifold Pipe2	-	-	HFQ-M32F	HFQ-M32F	HFQ-M462F	HFQ-M32F	HFQ-M462F	HFQ-M462F
Manifold Pipe3	-	-	-	-	-	HFQ-M32F	HFQ-M32F	HFQ-M462F

For S Series Heat Recovery 3 Pipes System

Outdoor Unit	AWWT-290-344KFSA	AWWT-390-522FKFSA	AWWT-544KFSA	AVWT-552FKFSA	AVWT-570-634FKFSA	AWWT-654-794KFSA	AVWT-816KFSA	AVWT-824-988KFSA	AWWT-988-1066KFSA	AVWT-1088KFSA
Manifold Pipe1	HFQ-M212F	HFQ-M302F	HFQ-M462XF	HFQ-M462XF	HFQ-M462XF	HFQ-M682XF	HFQ-M682XF	HFQ-M682XF	HFQ-M682XF	HFQ-M682XF
Manifold Pipe2	-	-	-	HFQ-M212F	HFQ-M302F	HFQ-M302F	HFQ-M462XF	HFQ-M302F	HFQ-M462XF	HFQ-M462XF
Manifold Pipe3	-	-	-	-	-	-	-	HFQ-M302F	HFQ-M302F	HFQ-M462XF

For S mavo+ Series System

Outdoor Unit	AVWT-290-422HKFSEA	AVWT-444-544HKFSEA	AVWT-552-634HKFSEA	AVWT-654-696HKFSEA	AVWT-714-816HKFSEA	AVWT-824-886HKFSEA	AVWT-908-1088HKFSEA
Manifold Pipe1	HFQ-M32F	HFQ-M462F	HFQ-M462F	HFQ-M682F	HFQ-M682F	HFQ-M682F	HFQ-M682F
Manifold Pipe2	-	-	HFQ-M32F	HFQ-M32F	HFQ-M462F	HFQ-M462F	HFQ-M462F
Manifold Pipe3	-	-	-	-	-	HFQ-M32F	HFQ-M462F

For X3 Series System

Outdoor Unit	AVWT-172-229UESZX	AVWT-250-307UESZX	AVWT-324-386UESZX	AVWT-404-460UESZX	AVWT-480-620UESZX
Manifold Pipe1	HFQ-M22F	HFQ-M32F	HFQ-M32F	HFQ-M32F	HFQ-M462F
Manifold Pipe2	-	-	HFQ-M22F	HFQ-M32F	HFQ-M32F
Manifold Pipe3	-	-	-	-	HFQ-M32F

For W Series 2 Pipes System

Outdoor Unit	AVWW-210-228FKFW	AVWW-250-380FKFW	AVWW-400-516FKFW	AVWW-534-570FKFW
Manifold Pipe1	HFQ-M22F	HFQ-M32F	HFQ-M32F	HFQ-M462F
Manifold Pipe2	-	-	HFQ-M22F	HFQ-M32F

For W Series 3 Pipes Heat Recovery System

Outdoor Unit	AVWW-202-212FKFW	AVWW-250-344FKFW	AVWW-360-380FKFW	AVWW-400-418FKFW	AVWW-440-570FKFW
Manifold Pipe1	HFQ-M202F	HFQ-M212F	HFQ-M302F	HFQ-M302F	HFQ-M302F
Manifold Pipe2	-	-	-	HFQ-M202F	HFQ-M212F

Branch Pipe (For indoor unit)

First Branch Pipe

For S5 Series System

Outdoor Unit HP	8 to 10	12 to 16	18 to 24	26 to 46	48 to 82	84 to 120
Branch Pipe	HFQ-102F	HFQ-162F	HFQ-242F	HFQ-302F	HFQ-462F	HFQ-682F

For S Series Heat Recovery 2 Pipes System

Outdoor Unit HP	8 to 10	12 to 16	18 to 24	26 to 54	56 to 66	68 to 112
Branch Pipe	HFQ-102F	HFQ-162F	HFQ-242F	HFQ-302F	HFQ-462F	HFQ-682F

For S Series Heat Recovery 3 Pipes System

Outdoor Unit HP	8 to 10	12 to 16	18 to 24	26 to 36	38 to 54	56 to 66	68 to 112
Branch Pipe	HFQ-M282F	HFQ-M452F	HFQ-M562F	HFQ-M692F	HFQ-M902F	HFQ-462XF	HFQ-682XF

For S mavo+ Series System

Outdoor Unit HP	8 to 10	12 to 16	18 to 24	26 to 44	46 to 66	68 to 112
Branch Pipe	HFQ-102F	HFQ-162F	HFQ-242F	HFQ-302F	HFQ-462F	HFQ-682F

For X3 Series System

Outdoor Unit HP	8 to 10	12 to 16	18 to 24	26 to 44	46 to 66	68 to 112
Branch Pipe	HFQ-102F	HFQ-162F	HFQ-242F	HFQ-302F	HFQ-462F	HFQ-682F

First Branch Pipe~Last Branch Pipe

For S5 Series System

Total Indoor Unit Hp	Lower than 6	6 to 8.99	9 to 11.99	12 to 15.99	16 to 17.99	18 to 25.99	26 to 35.99	36 to 55.99	56 to 57.99	58 to 67.99	Over 68
Gas (mm)	15.88	19.05	22.2	25.4	28.6	28.6	31.75	38.1	41.3	44.5	50.8
Liquid (mm)	9.53	9.53	9.53	12.7	12.7	15.88	19.05	19.05	22.2	22.2	25.4
Branch Pipe	HFQ-102F	HFQ-102F	HFQ-102F	HFQ-162F	HFQ-162F	HFQ-242F	HFQ-302F	HFQ-302F	HFQ-462F	HFQ-462F	HFQ-682F

For S Series Heat Recovery 2 Pipes System

Total Indoor Unit Hp	Lower than 6	6 to 8.99	9 to 11.99	12 to 15.99	16 to 17.99	18 to 25.99	26 to 35.99	36 to 55.99	56 to 57.99	58 to 67.99	Over 68
Gas (mm)	15.88	19.05	22.2	25.4	28.6	28.6	31.75	38.1	41.3	44.5	50.8
Liquid (mm)	9.53	9.53	9.53	12.7	12.7	15.88	19.05	19.05	22.2	22.2	25.4
Branch Pipe	HFQ-102F	HFQ-102F	HFQ-102F	HFQ-162F	HFQ-162F	HFQ-242F	HFQ-302F	HFQ-302F	HFQ-462F	HFQ-462F	HFQ-682F

For S Series Heat Recovery System

Total Indoor Unit Hp	Lower than 6	6 to 8.99	9 to 11.99	12 to 15.99	16 to 17.99	18 to 21.99	22 to 25.99	26 to 35.99	36 to 55.99	56 to 57.99	58 to 67.99	Over 68
Low Pressure Gas (mm)	15.88	19.05	22.2	25.4	28.6	28.6	28.6	31.75	38.1	41.3	44.5	50.8
High/Low Pressure Gas (mm)	12.7	15.88	19.05	22.2	22.2	22.2	25.4	28.6	31.75	38.1	41.3	44.5
Liquid(mm)	9.53	9.53	9.53	12.7	12.7	15.88	15.88	19.05	19.05	22.2	22.2	25.4
Branch Pipe	HFQ-M142F	HFQ-M282F	HFQ-M282F	HFQ-M452F	HFQ-M562F	HFQ-M562F	HFQ-M692F	HFQ-M692F	HFQ-M902F	HFQ-462XF	HFQ-462XF	HFQ-462XF

For S mavo+ Series System

Total Indoor Unit Hp	Lower than 6	6 to 8.99	9 to 11.99	12 to 15.99	16 to 17.99	18 to 25.99	26 to 33.99	34 to 45.99	46 to 58.99	59 to 68.99	Over 69
Gas (mm)	15.88	19.05	22.2	25.4	28.6	28.6	31.75	38.1	41.3	44.5	50.8
Liquid (mm)	9.53	9.53	9.53	12.7	12.7	15.88	19.05	19.05	22.2	22.2	25.4
Branch Pipe	HFQ-102F	HFQ-102F	HFQ-102F	HFQ-162F	HFQ-162F	HFQ-242F	HFQ-302F	HFQ-302F	HFQ-462F	HFQ-462F	HFQ-682F

For X3 Series System

Total Indoor Unit Hp	Lower than 6	6 to 8.99	9 to 11.99	12 to 15.99	16 to 17.99	18 to 25.99	26 to 33.99	34 to 45.99	46 to 58.99	59 to 68.99	Over 69
Gas (mm)	15.88	19.05	22.2	25.4	28.6	28.6	31.75	38.1	41.3	44.5	50.8
Liquid (mm)	9.53	9.53	9.53	12.7	12.7	15.88	19.05	19.05	22.2	22.2	25.4
Branch Pipe	HFQ-102F	HFQ-102F	HFQ-102F	HFQ-162F	HFQ-162F	HFQ-242F	HFQ-302F	HFQ-302F	HFQ-462F	HFQ-462F	HFQ-682F







Last Branch Pipe~Indoor Unit

Indoor Unit	Pipe Size (Φ mm)		Max. Liquid Pipe Length
	Gas Pipe	Liquid Pipe	
7kBtu/h~14kBtu/h	12.70	6.35*1	40
17kBtu/h~18kBtu/h	15.88	6.35*1	40
22kBtu/h~54kBtu/h	15.88	9.53	40
76kBtu/h	19.05	9.53	40
96kBtu/h	22.20	9.53	40

Note; 1. When liquid pipe length of indoor unit (07~18kBtu/h) is more than 15m, please change the liquid pipe dimension from Φ6.35 into Φ9.53.

Manifold Pipe Parameter

Unit: mm, ID: Inner Diameter, OD: Outer Diameter.

Model	Gas Line	Liquid Line	Reducer for Gas Line	Reducer for Liquid Line
HFQ-M22F#E HFQ-M22F#ES				
HFQ-M32F#E HFQ-M32F#ES				

Manifold Pipe Parameter

Model	Gas Line	Liquid Line	Reducer for Gas Line	Reducer for Liquid Line
HFQ-M462F#E HFQ-M462F#ES				
HFQ-M682F#E HFQ-M682F#ES				

Model	Low Pressure Gas Line	High Pressure Gas Line	Liquid Line	Reducer for Low Pressure Gas Line	Reducer for High Pressure Gas Line	Reducer for Liquid Line
HFQ-M202F#E						
HFQ-M212F#E						
HFQ-M302F#E						
HFQ-M462XF#ES						
HFQ-M682XF#ES						

Note: The model with #E stands for non-insulation type, while with #ES represents insulation type.

Branch Pipe Parameter

Model	Low Pressure Gas Line	High Pressure Gas Line	Liquid Line	Reducer for Low Pressure Gas Line	Reducer for High Pressure Gas Line	Reducer for Liquid Line
HFQ-M142F#E						
HFQ-M282F#E						
HFQ-M452F#E						
HFQ-M562F#E						
HFQ-M692F#E						
HFQ-M902F#E						
HFQ-462XF#ES						
HFQ-682XF#ES						

Note: The model with #E stands for non-insulation type, while with #ES represents insulation type.

RELIABILITY

EFFICIENCY

COMFORT

FLEXIBILITY

OUTDOOR UNIT

INDOOR UNIT

CONTROL SYSTEM

ACCESSORY

Branch Pipe Parameter

Model	Gas Line	Liquid Line	Reducer for Gas Line	Reducer for Liquid Line
HFQ-052F#E				
HFQ-102F#E HFQ-102F#ES				Q'ty : 2
HFQ-162F#E HFQ-162F#ES			Q'ty: 1	Q'ty: 1
HFQ-242F#E HFQ-242F#ES			Q'ty: 1	Q'ty: 1
HFQ-302F#E HFQ-302F#ES			Q'ty: 1	Q'ty: 1
			Q'ty: 1	
			Q'ty: 1	
HFQ-462F#E HFQ-462F#ES			Q'ty : 1	ID 25.4
			Q'ty : 2	
HFQ-682F#E HFQ-682F#ES			Q'ty : 1	Q'ty : 2
			Q'ty : 2	
			Q'ty : 1	
			Q'ty : 2	

Note: The model with #E stands for non-insulation type, while with #ES represents insulation type.

Branch Header

Model	Gas Line	Liquid Line	Closing Pipe	Expander
HFQ-064HFD			(gas pipe) OD12.7 (2 pc)	
			(liquid pipe) OD6.35 (2 pc)	(liquid pipe) ID9.53 OD6.35 (4 pc)
HFQ-068HFD			(gas pipe) OD12.7 (6 pc)	(gas pipe) ID19.05 OD15.88 (2 pc)
			(liquid pipe) OD6.35 (6 pc)	(liquid pipe) ID9.53 OD6.35 (8 pc)
HFQ-0610HFD			(gas pipe) OD12.7 (8 pc)	(gas pipe) ID19.05 OD15.88 (2 pc)
			(liquid pipe) OD6.35 (8 pc)	(liquid pipe) ID9.53 OD6.35 (10pc)

RELIABILITY

EFFICIENCY

COMFORT

FLEXIBILITY

OUTDOOR UNIT

INDOOR UNIT

CONTROL SYSTEM

ACCESSORY

Branch Header for A Series

Unit:mm

Model	ØN	ØM	Gas side joint(ØN-ØM)	ØP	Liquid side joint(Ø9.53-ØP)	Insulation
HFQ-082TF#EN	15.88	12.7		6.35		Gas Side Liquid Side
HFQ-102TF#EN	19.05	15.88		9.53		
HFQ-083TF#EN	15.88	12.7		6.35		Gas Side
HFQ-103TF#EN	19.05	15.88		9.53		Liquid Side
HFQ-084TF#EN	15.88	12.7		6.35		Gas Side
HFQ-104TF#EN	19.05	15.88		9.53		Liquid Side
HFQ-085TF#EN	15.88	12.7		6.35		Gas Side
HFQ-105TF#EN	19.05	12.7		6.35		Liquid Side
HFQ-086TF#EN	15.88	12.7		6.35		Gas Side
HFQ-106TF#EN	19.05	12.7		6.35		Liquid Side
ADAPTER						
HPI-E1215N						
HPI-E0609N						
HPI-E1519N1						
HPI-E0912N						

Flare-nuts Branch Pipe for A Series

Model	Gas	Liquid
HFQ-052F#EN 1		
HFQ-052F#EN 2		
HFQ-052F#EN 3		